
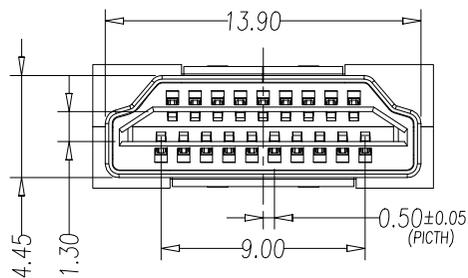
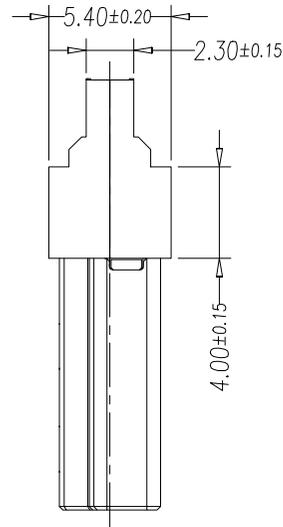
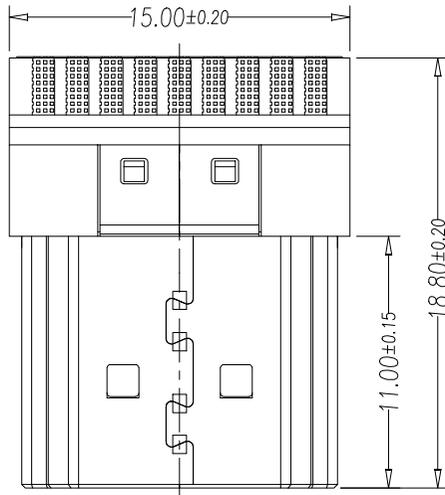


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2012/12/28	Jamie Zie

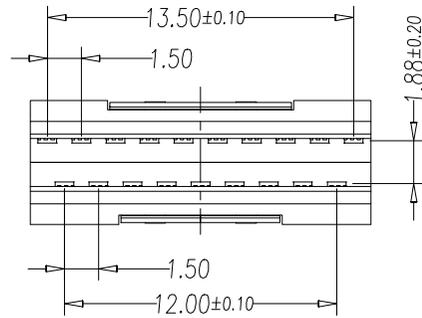

备注:

材质

胶芯: LCP ,UL 94V-0;颜色: 黑色

外壳: C2680; ,镀镍30U"min,

端子: C5191R-H 镍底30U"Min,接触区镀金G/F,焊接区镀锡50U"

电气特性

额定电压: 40 V AC Max.

额定电流: 0.5 A

接触阻抗: 30 mΩ Max.


绝缘阻抗: 100 MΩ Min.

耐电压值: 500 V AC/1分钟

机械特性

插入力: 44.1N(4.5kg) Max.

拔出力: 9.8N(1kg) Min.,39.2N(4.0kg) Max.

NO	VARIETY	QTY	MATERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE:		DESIGN BY :	DATE :	PART NAME:
X:X	±0.38	Jamie Zie	2012/12/28	HDMI SMD 19 PIN
X:XX	±0.25	CHECKED BY:	DATE :	PART NO.
X:XXX	±0.13	David Chou	2012/12/28	MHDM-B1901-024-RS
ANGLE:	±3°	APPROVED BY1:	DATE :	MOLD NO.
 UNIT: mm [inch]		Richard Hsieh	2012/12/28	NA
		APPROVED BY2:	DATE :	DRAW NO.
SCALE:1:1	SIZE:A4	Richard Hsieh	2012/12/28	SHEET NO. 1 OF 1