






GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2013/09/13	Jamie Zie

NOTES:


- MATERIALS:
HOUSING: SEE ORDER INFORMATION BLACK(UL94V-0)
CONTACTS: PHOSPHOR BRONZE
- FINISH:
CONTACT: 50u" NICKEL UNDERPLAT ON ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
G/F GOLD PLATED ON CONTACT AREA.
SHIELD: COPPER ALLOY PLATED WITH NICKEL
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68, SUBPART F

MATRIX PART NO:

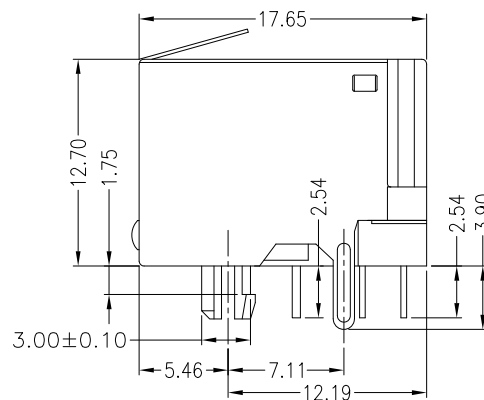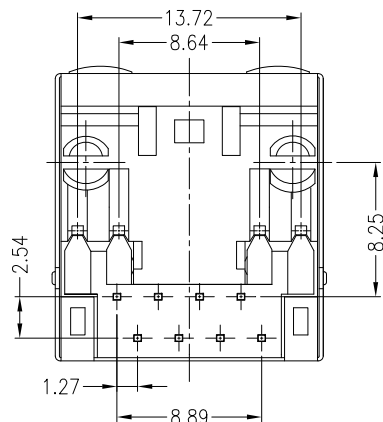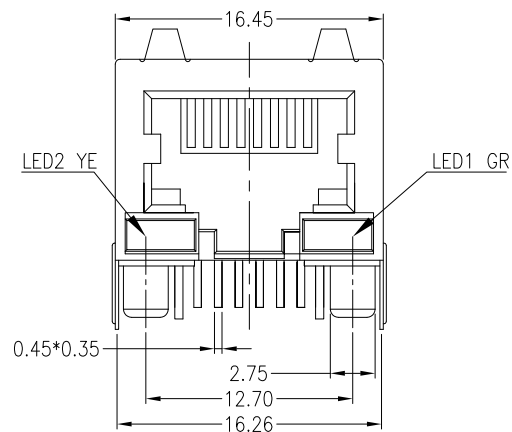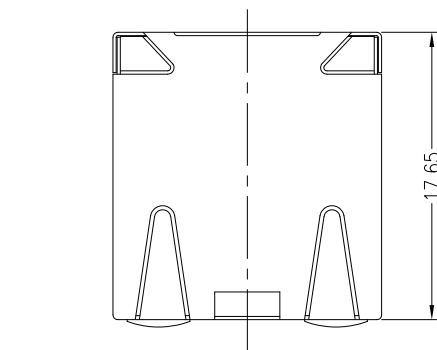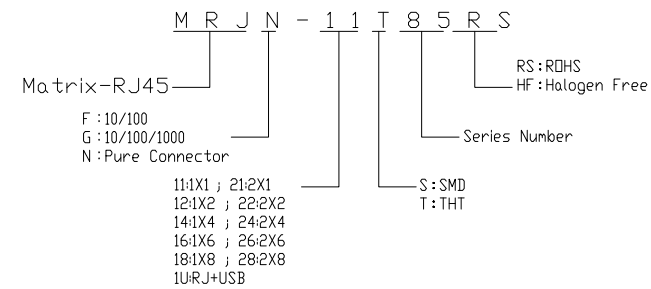

LED CODE:



	Left LED2		Right LED1	
1	L4+ L3-	L4- L3+	L2+ L1-	L2- L1+
	YE		GR	

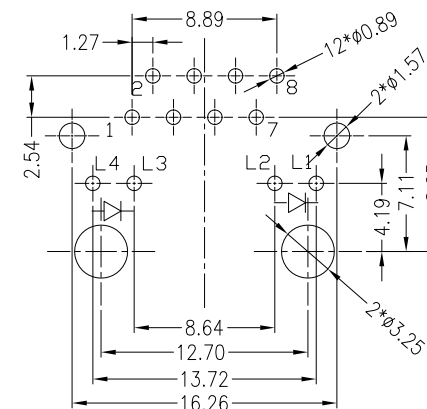

SUGGESTED PCB LAYOUT

(TOP VIEW)

DIMENSIONS TOLERANCE: .XX±0.05

NO	VARIETY	QTY	MATERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X: X X: XX ±0.38 X: XXX ±0.25 X: XXX ±0.13 ANGLE: ±3°		DESIGN BY : Jamie Zie	DATE : 2013/09/13	PART NAME: RJ45 CONN. JM 1W1 BOTTOM CONNCTOR W/LED, 8P8C
 UNIT: mm [inch]		CHECKED BY: Vicky Hsieh	DATE : 2013/09/13	PART NO. MRJN-11T85RS
 SCALE:1:1 SIZE:A4		APPROVED BY1: Richard Hsieh	DATE : 2013/09/13	MOLD NO. NA
		APPROVED BY2: Richard Hsieh	DATE : 2013/09/13	DRAW NO.
				SHEET NO. 1 OF 1