
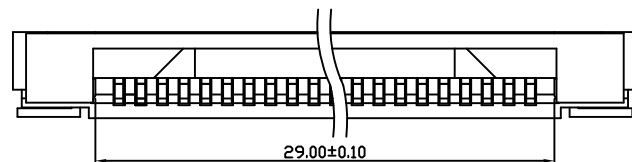
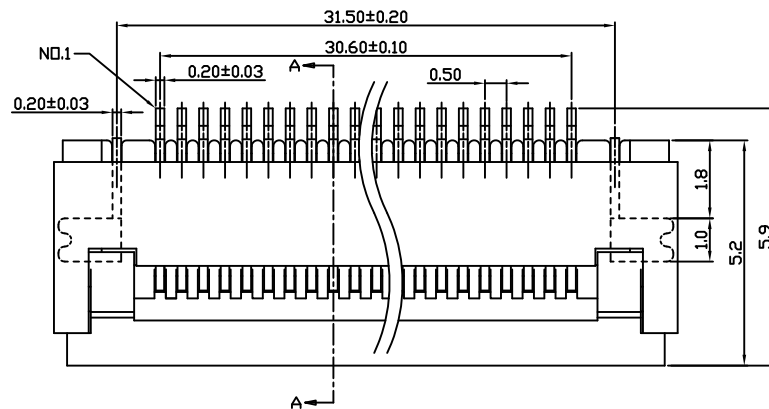
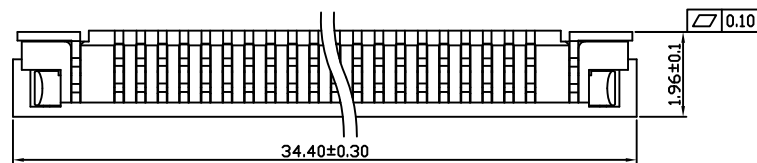


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2013/07/19	Jamie Zie

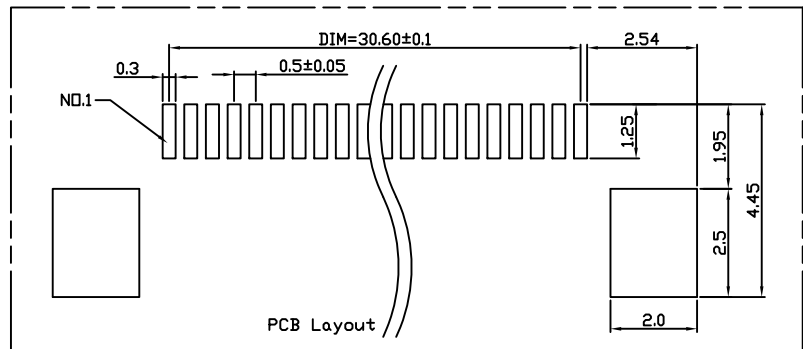

Electrical Characteristics:
Current rating: 0.4A AC/DC
Voltage rating: 50V AC/DC
Temperature range:-25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: 20mΩ
Insulation resistance: 500MΩ
Relative Humidity:93%+40°C

Material Description:
Terminal:Phosphor Bronze TIN-Plated
Fitting Nail:Phosphor Bronze TIN-Plated
Housing:Thermoplastic(UL94V-0)
Slider:Thermoplastic(UL94V-0)
PLASTIC BURRS 0.1mm MAX

MATRIX PART NO:

M F C - 05 - 60 C 28 RS

Matrix FPC




pitch
25:2.54mm
12:1.25mm
10:1.0mm
05:0.5mm
03:0.3mm

Pin number

RS:ROHS
HF:Halogen Free

Series Number

T:雙觸式
C:掀蓋式
P:壓樑式

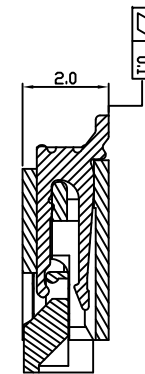

SECTION A-A

NO	VARIETY	QTY	METERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3°		DESIGN BY : Jamie Zie	DATE : 2013/07/19	PART NAME: P=0.5mm H=2.0 FPC CONNECTOR Clamshell
CHECKED BY: Vicky Hsieh		DATE : 2013/07/19	PART NO.	MFC-05-60C28RS
APPROVED BY1: Richard Hsieh		DATE : 2013/07/19	MOLD NO.	NA
APPROVED BY2: Richard Hsieh		DATE : 2013/07/19	DRAW NO.	
SCALE:1:1 SIZE:A4			SHEET NO.	1 OF 1