





GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2013/07/09	Jamie Zie




NOTES:

- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:WHITE;
ACTUATOR: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:BROWN;
CONTACT: COPPER ALLOY;
LEG: COPPER ALLOY;
- PLATING:
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL.
LEG: TIN PLATED ON NICKEL OVERALL.
- RATING:
CURRENT RATING: 0.4A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -55°C~+85°C

MATRIX PART NO:

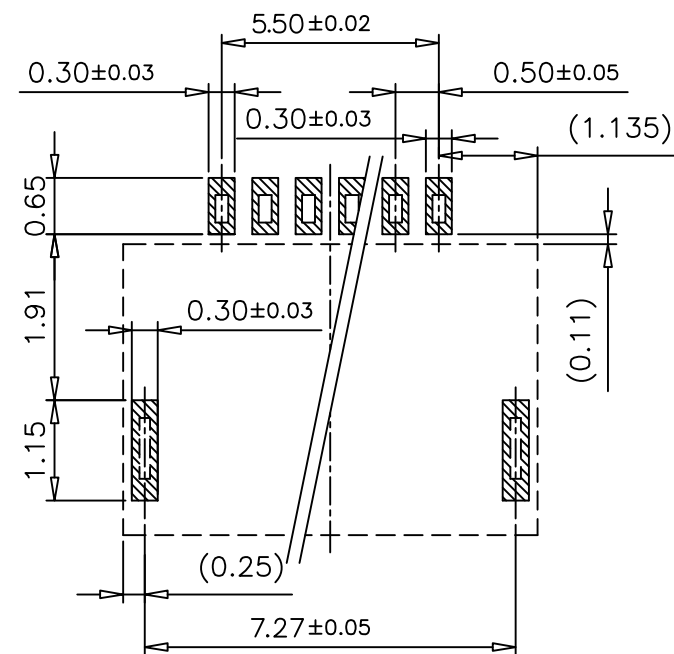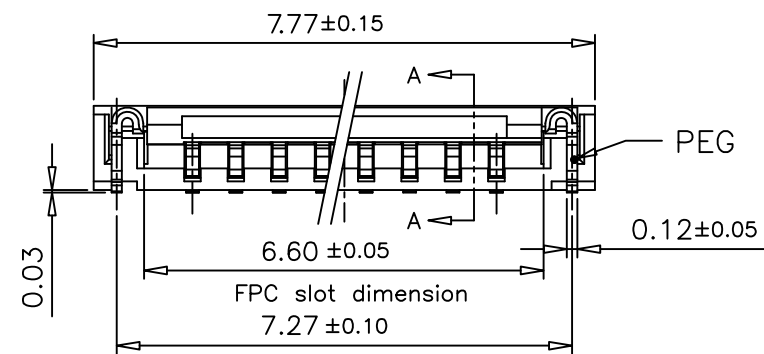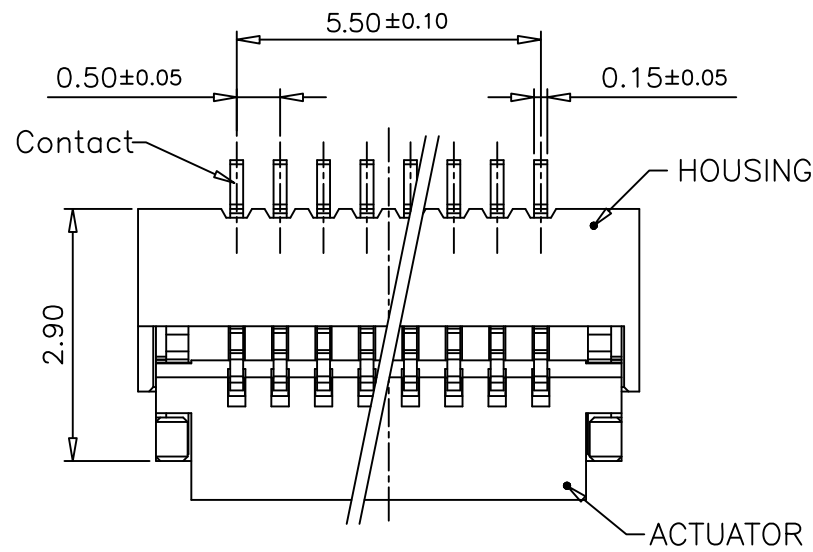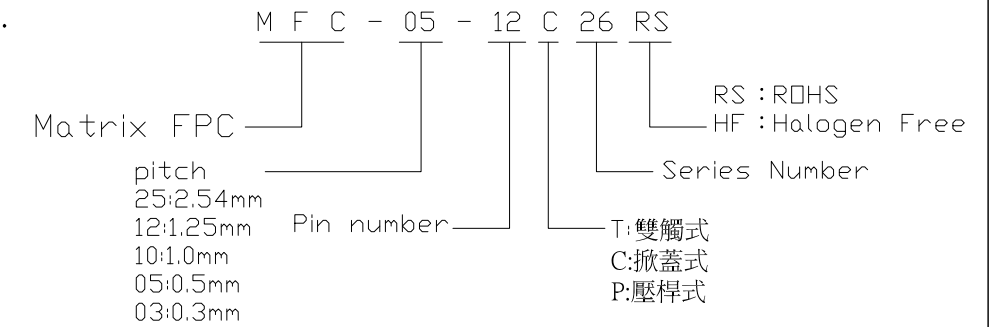

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

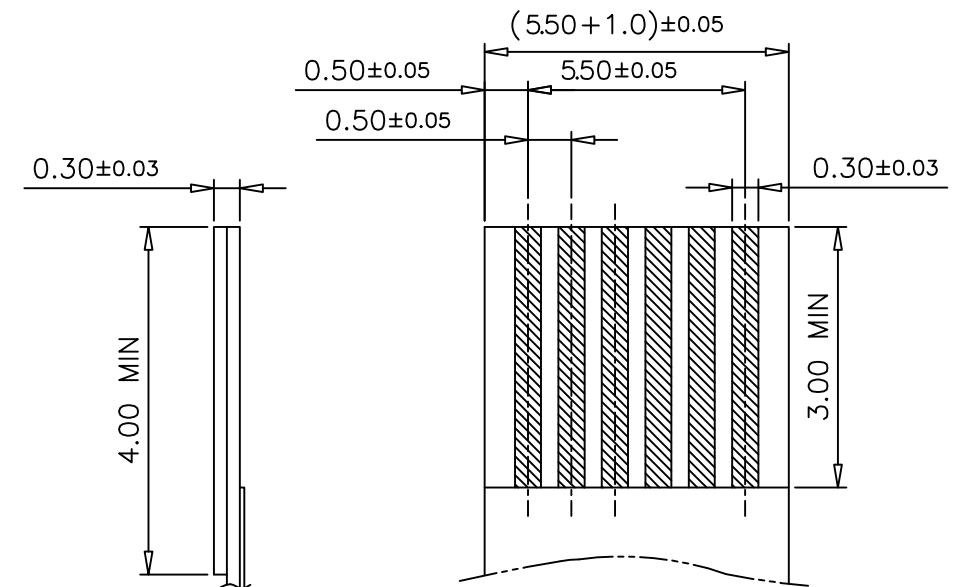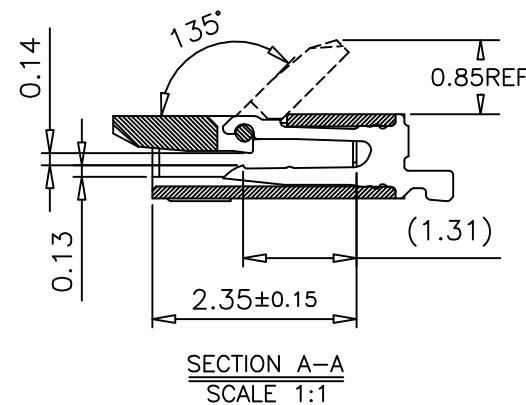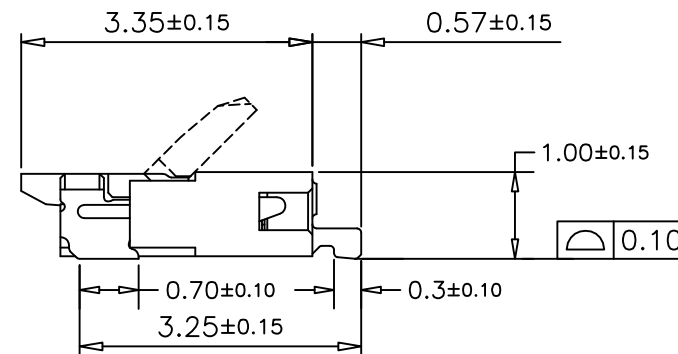

Applicable FPC

NO	VARIETY	QTY	METERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X: X X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3°		DESIGN BY : Jamie Zie	DATE : 2013/07/09	PART NAME: P=0.5mm H=1.0 FPC CONNECTOR Clamshell
CHECKED BY: Vicky Hsieh		APPROVED BY1: Richard Hsieh	DATE : 2013/07/09	PART NO. MFC-05-12C26RS
APPROVED BY2: Richard Hsieh		DATE : 2013/07/09	MOLD NO. NA	
UNIT: mm [inch] SCALE:1:1 SIZE:A4		DATE : 2013/07/09	DRAW NO.	
		SHEET NO.	1 OF 1	