

GP Component







REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2013/05/29	Jamie Zie

NOTES:

- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:WHITE;
ACTUATOR: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:BROWN;
CONTACT: COPPER ALLOY;
LEG: COPPER ALLOY;
- PLATING:
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL.
LEG: TIN PLATED ON NICKEL OVERALL.
- RATING:
CURRENT RATING: 0.4A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -55°C~+85°C

MATRIX PART NO:

M F C - 05 - 14 C 24 RS
Matrix FPC
pitch
25:2.54mm
12:1.25mm
10:1.0mm
05:0.5mm
03:0.3mm
Pin number
RS:ROHS
HF:Halogen Free
Series Number
T:雙觸式
C:掀蓋式
P:壓桿式

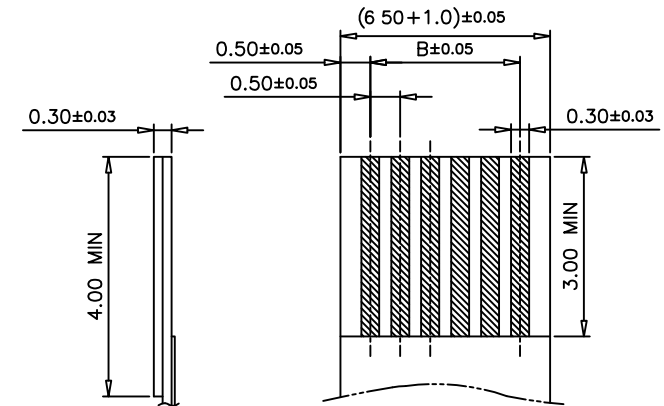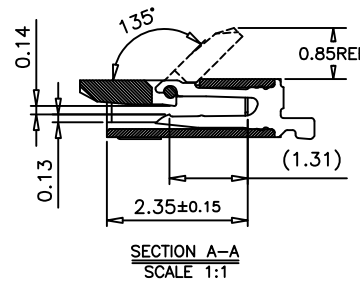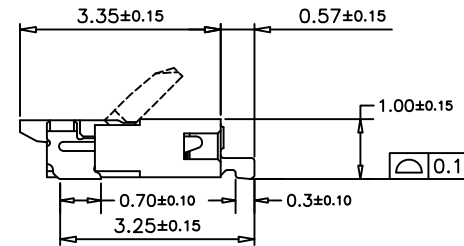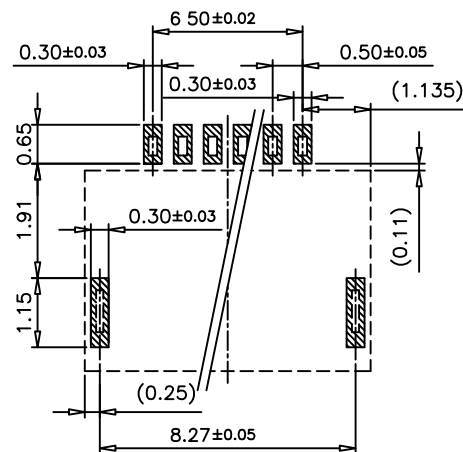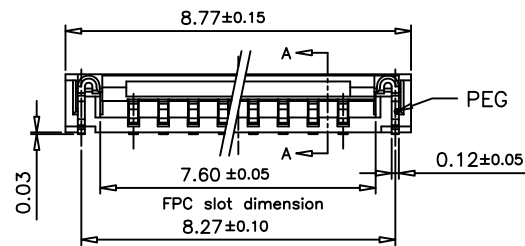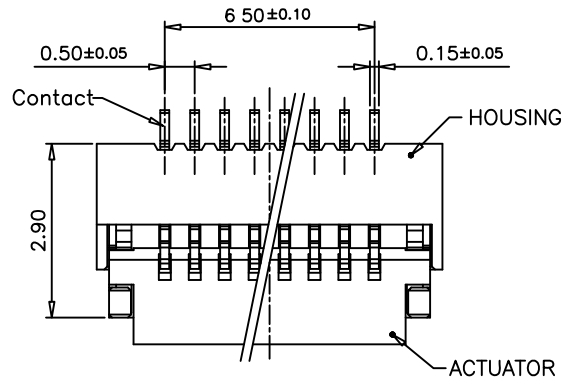

Applicable FPC

NO	VARIETY	QTY	METERIAL	REMARK
	Matrix Electronics Co.,Ltd			
TOLERANCE: X:X X:X X:XX X:XXX ANGLE: ±3°		DESIGN BY : Jamie Zie	DATE : 2013/05/29	PART NAME: P=0.5mm H=1.0 FPC CONNECTOR Clamshell
UNIT: mm [inch]		CHECKED BY: Vicky Hsieh	DATE : 2013/05/29	PART NO. MFC-05-14C24RS
SCALE:1:1		APPROVED BY1: Richard Hsieh	DATE : 2013/05/29	MOLD NO. NA
SIZE:A4		APPROVED BY2: Richard Hsieh	DATE : 2013/05/29	DRAW NO. SHEET NO. 1 OF 1