


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2014/09/25	Phebe Su

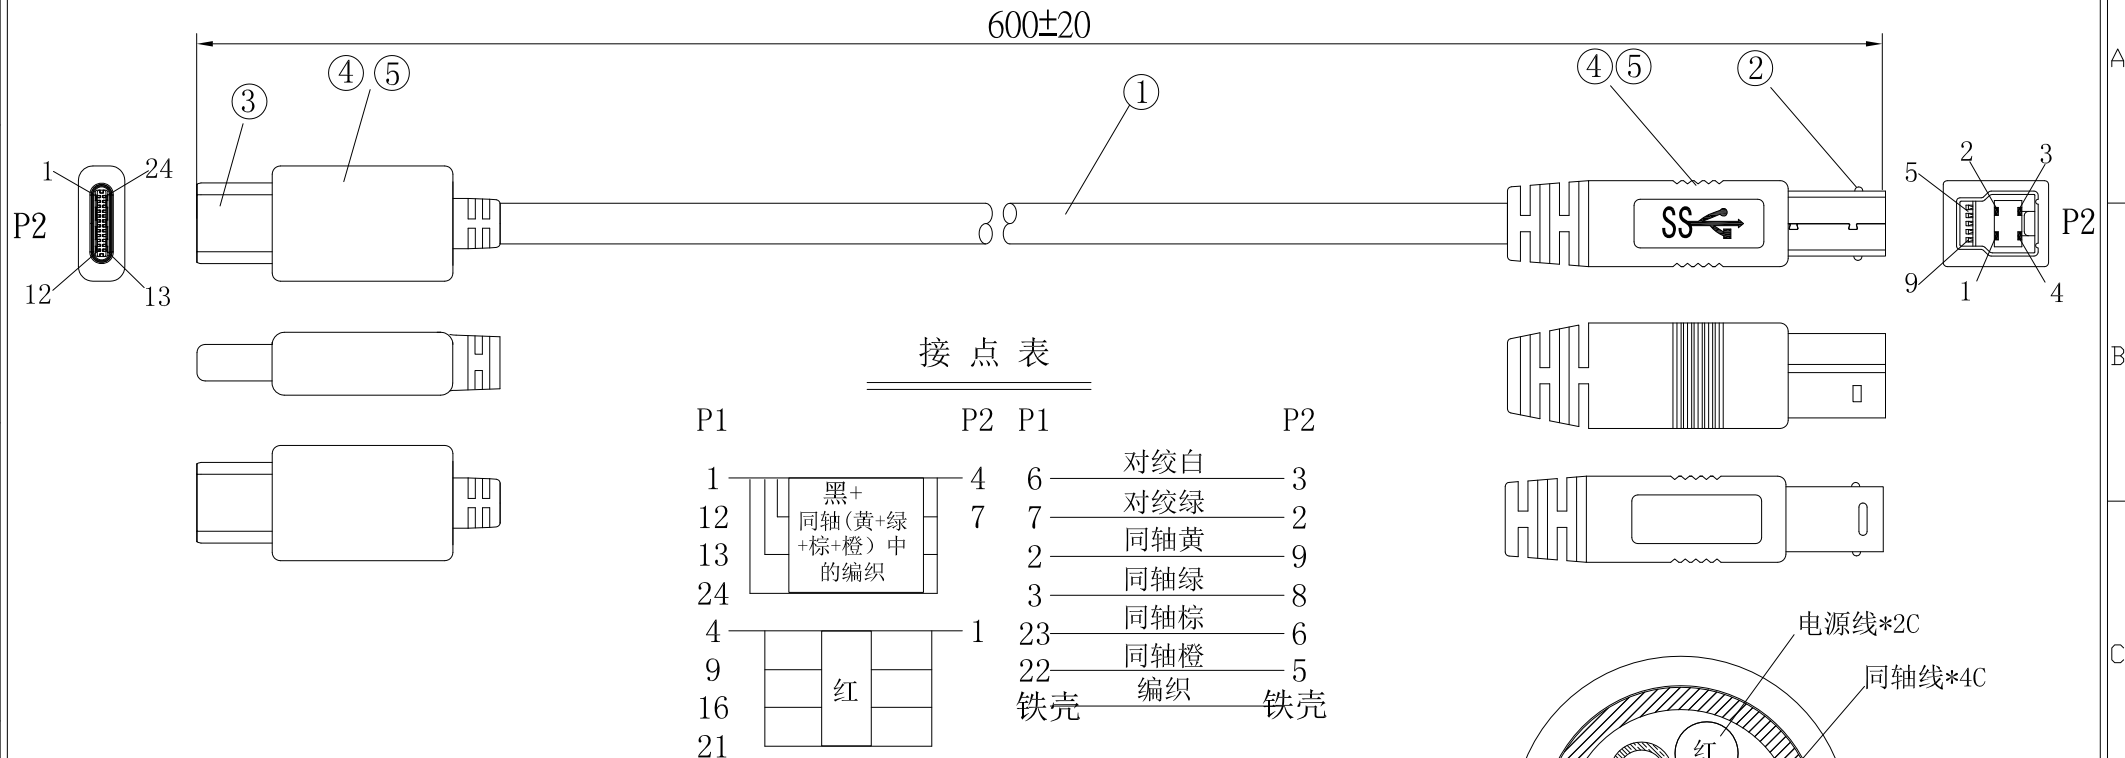


材料:

- 线材: (30AWG coax*1C)*4+(30AWG*1P+AL/MY)+24AWG*2C+AL+B(16/4/0.12)
OD:4.8mm 外被颜色:黑色.
- 连接器:USB 3.1 B公 蓝胶芯 端子漂金, 铁壳镀镍, 焊线式
- 连接器:USB 3.1 C公 端子漂金, 铜壳镀镍, 焊线式+PCB板
- 透明PE料.
- 外模料:PVC 45P, 颜色:黑色.

测试条件:

- 100% 短路&断路&错位测试.
- 绝缘阻抗:2M ohm(MIN)
- 导通阻抗:5 ohm(MAX).
- 耐压测试:DC 300V/10ms

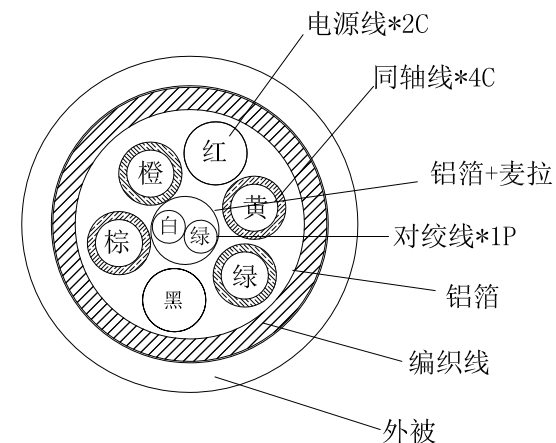

NO	VARIETY	QTY	METERIAL	REMARK
	Matrix Electronics Co.,Ltd			
TOLERANCE:		DESIGN BY :	DATE :	PART NAME:
X.X ±0.38		Phebe Su	2014/09/25	USB 3.1 CM TO USB 3.1 BM
X.XX ±0.25		CHECKED BY:	DATE :	PART NO.
X.XXX ±0.13		Vicky Hsieh	2014/09/25	MCABLE-UTU-018-RS
ANGLE: ±3°		APPROVED BY1:	DATE :	MOLD NO.
		Richard Hsieh	2014/09/25	NA
UNIT: mm [inch]		APPROVED BY2:	DATE :	DRAW NO.
SCALE:1:1		Richard Hsieh	2014/09/25	SHEET NO.
SIZE:A4				1 OF 1