


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2014/09/25	Phebe Su

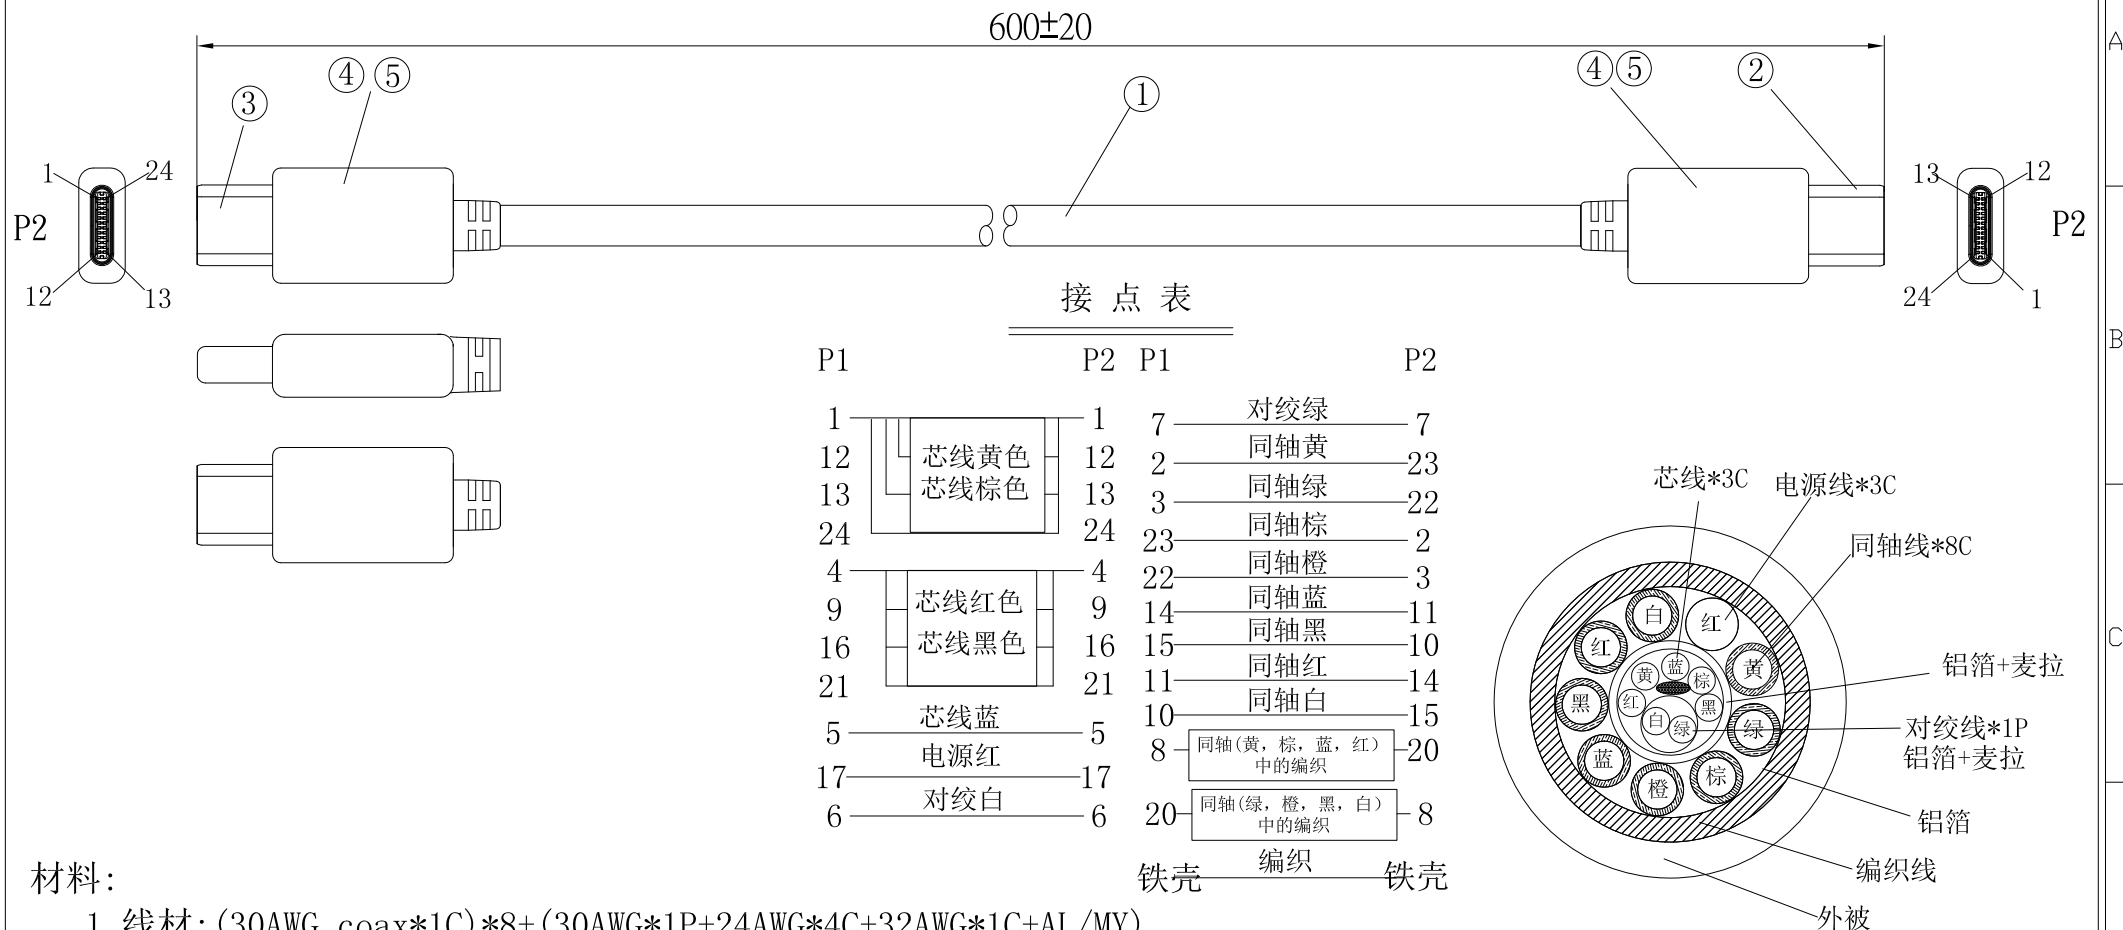


材料:

- 线材: (30AWG coax*1C)*8+ (30AWG*1P+24AWG*4C+32AWG*1C+AL/MY)+32AWG*1C+AL+B (16/4/0.12) OD: 4.8mm 外被颜色: 黑色.
- 连接器: USB 3.1 C公 端子漂金, 铜壳镀镍, 焊线式+PCB板
- 透明PE料.
- 外模料: PVC 45P, 颜色: 黑色.

测试条件:

- 100% 短路&断路&错位测试.
- 绝缘阻抗: 2M ohm (MIN)
- 导通阻抗: 5 ohm (MAX).
- 耐压测试: DC 300V/10ms

NO	VARIETY	QTY	METERIAL	REMARK
			Matrix Electronics Co., Ltd	
TOLERANCE:		DESIGN BY :	DATE :	PART NAME:
X:X ±0.38		Phebe Su	2014/09/25	USB 3.1 CM TO USB 3.1 CM
X:XX ±0.25		CHECKED BY:	DATE :	PART NO.
X:XXX ±0.13		Vicky Hsieh	2014/09/25	MCABLE-UTU-019-RS
ANGLE: ±3°		APPROVED BY1:	DATE :	MOLD NO.
		Richard Hsieh	2014/09/25	NA
UNIT: mm [inch]		APPROVED BY2:	DATE :	DRAW NO.
SCALE:1:1 SIZE:A4		Richard Hsieh	2014/09/25	SHEET NO.
				1 OF 1