



GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2014/12/16	Phebe Su

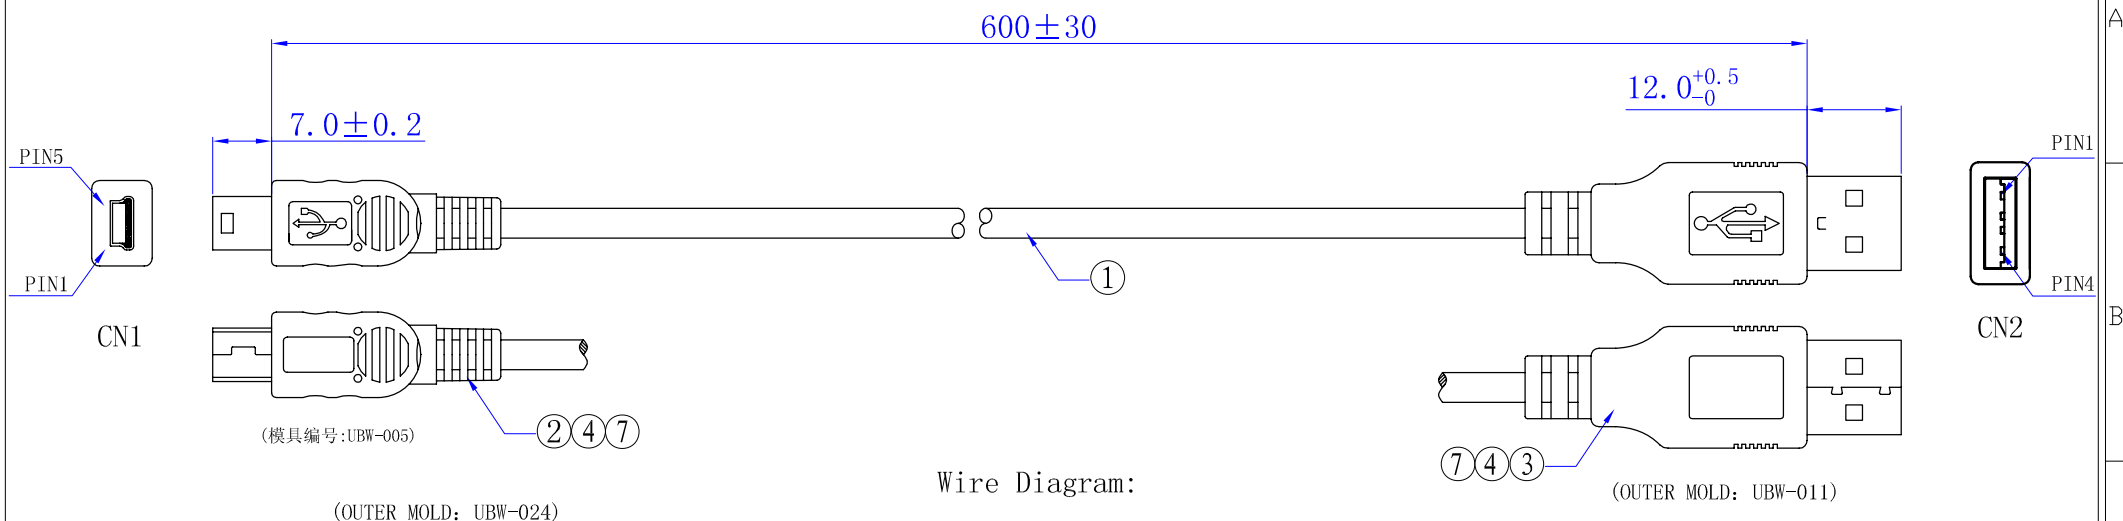


Wire Diagram:

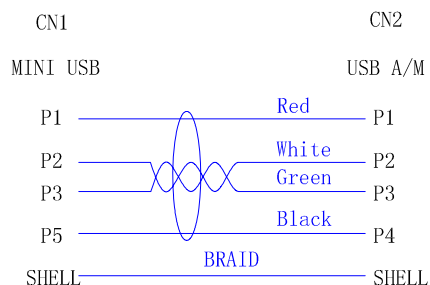


Electrical test:

1. 100% open、short、mistake test
2. Insulation resistance:DC300V, 5M Ω (MIN) ;
3. Connection resistance:2 Ω (MAX)
4. All cable materials are RoHS standard

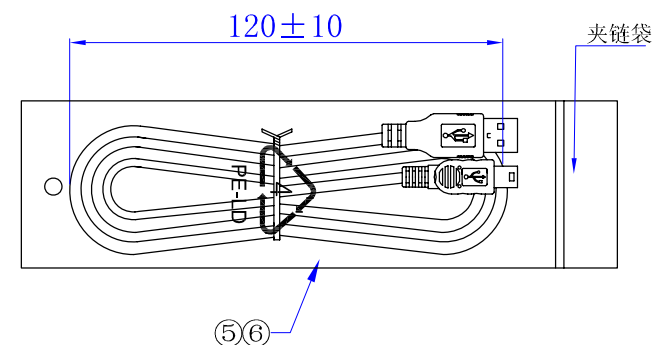

7	Copper foil	2PCS		Copper foil:L20*W10
6	BAG	1PCS	C. 3. 10. B140605B-03	BAG:L140*W60*T0. 03
5	TIE	1PCS		Black tie with steel PE l=100mm
4	PLASTIC	9. 6g		45P Black PVC
3	CONN	1set	C. 3. 06. MMUSB050-05	MINI USB 5PIN plated G/F",color:black
2	CONN	1set	C. 3. 06. MUSB#049-02	USB 4pin A/M,plated G/F",shell mate material:SPCC nickel plated,color:white
1	CABLE	580mm		UL2725 OD4. 5 28# (7/0. 12TC) *2C+24#(7/0. 2TC)*2C+AL+B(16/6/0. 12铜包铝镁) 黑色半雾面外被
项目 Item	物料名称 Name	数量 Q'ty	物料编码 Part NO.	物料规格 Specification

NO	VARIETY	QTY	MATERIAL	REMARK	
 Matrix Electronics Co.,Ltd					
TOLERANCE: X.X ±0.20 X.XX ±0.15 X.XXX ±0.05 ANGLE: ±3°		DESIGN BY : Phebe Su	DATE : 2014/12/16	PART NAME: MINI USB TO USB A/M L=600mm	
		CHECKED BY: Vicky Hsieh	DATE : 2014/12/16	PART NO.	MCABLE-UTU-021-RS
		APPROVED BY1: Richard Hsieh	DATE : 2014/12/16	MOLD NO.	NA
UNIT: mm [inch]		APPROVED BY2: Richard Hsieh	DATE : 2014/12/16	DRAW NO.	
SCALE:1:1	SIZE:A4			SHEET NO.	1 of 1