
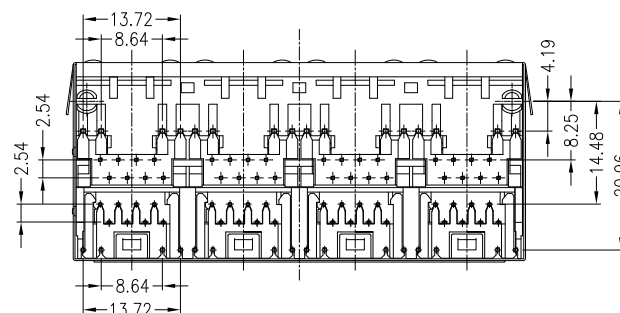
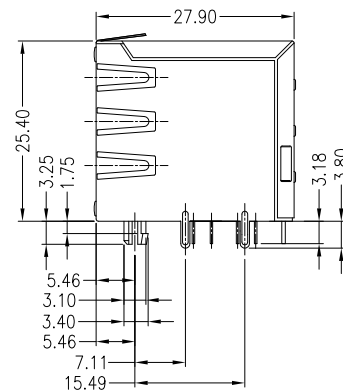
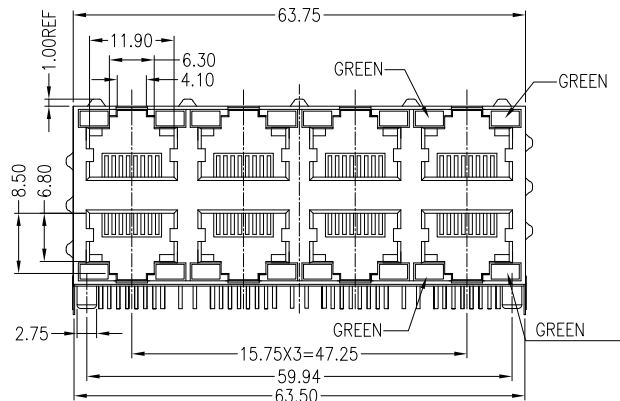
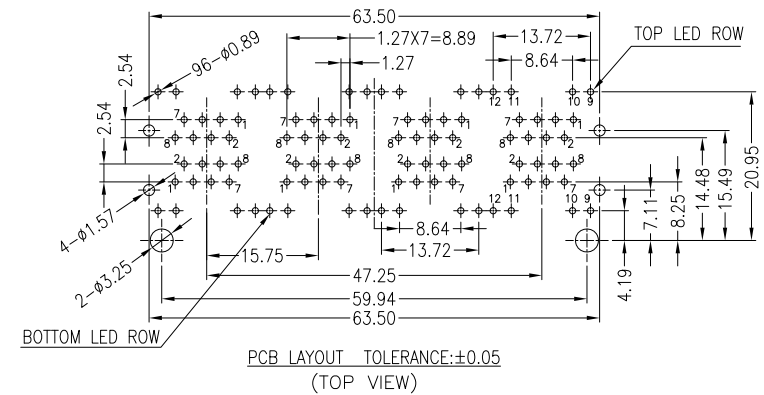
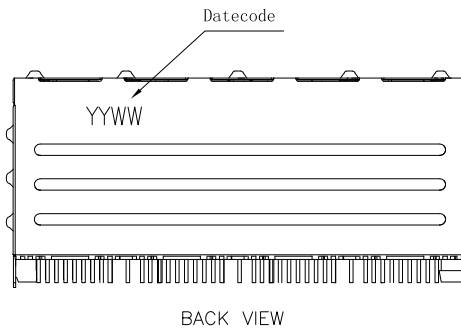


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2014/12/25	Phebe Su

1. MECHANICAL DIMENSIONS :

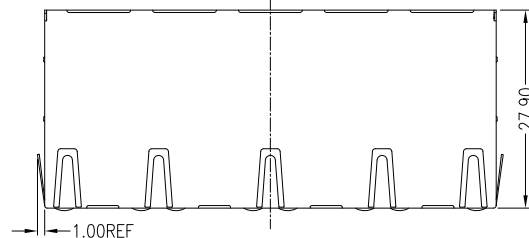

MATRIX PART NO:

Matrix-RJ45

F: 10/100
G: 10/100/1000
N: Pure Connector

11:1X1 ; 21:2X1
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1URJ+USB

S: SMD
T: THT

RS: RoHS
HF: Halogen Free

Industrial Temperature

Series Number

LEFT LED: RIGHT LED:

GREEN GREEN

L12 + — L11 L10 + — L9

NOTES:

1.MATERIAL:

HOUSING:HIGH TEMP.THERMOPLASTIC,BLACK,UL 94V-0, PBT-Black
CONTACT:PHOSPHOR BORNZE,T=0.35mm.
SHELL:BRASS

2.FINISH:

CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA, 100u"MIN. TIN ON SOLDER TAILS,
6u" GOLD PLATING ON CONTACT AREA.

3.OPERATING TEMPERATURE:-40°C~+85°C.

4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

NO	VARIETY	QTY	MATERIAL	REMARK
 Matrix Electronics Co., Ltd				
TOLERANCE: X: X X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3°		DESIGN BY : Phebe Su	DATE : 2014/12/25	PART NAME: RJ45 2X4 PORT CONNECTOR W/LED, 8P8C, Shielded
UNIT: mm [inch]		CHECKED BY: Vicky Hsieh	DATE : 2014/12/25	PART NO. MRJN-24T204TRS
SCALE:1:1 SIZE:A4		APPROVED BY1: Richard Hsieh	DATE : 2014/12/25	MOLD NO. NA
		APPROVED BY2: Richard Hsieh	DATE : 2014/12/25	DRAW NO. SHEET NO. 1 OF 3