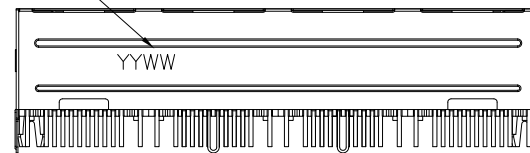


GP Component

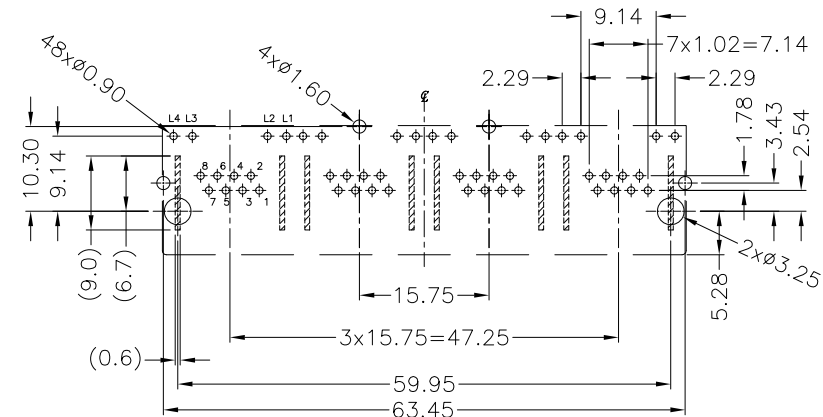
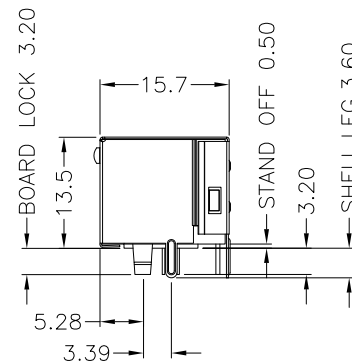
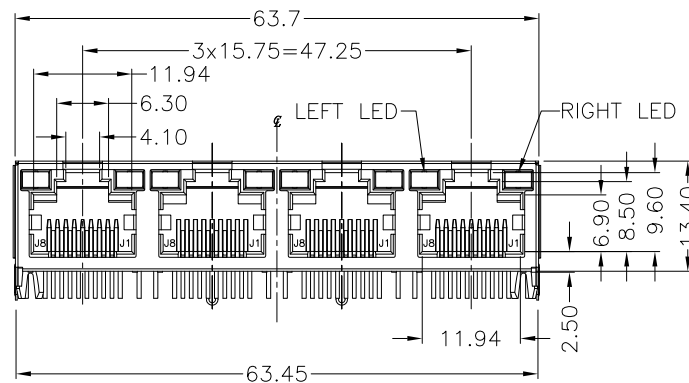
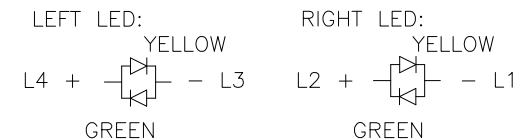
REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2016/04/21	Phebe Su



噴印週期



BACK VIEW

RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05 

NOTES:

1.MATERIAL:

HOUSING:HIGH TEMPERATURE THERMO PLASTIC (UL94V-0)
PBT Black

CONTACT:PHOSPHOR BRONZE,T=0.46mm

SHELL:SUS201-1/2H,T=0.20mm

2.FINISHED:

CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA, G/F
PLATING ON CONTACT AREA.

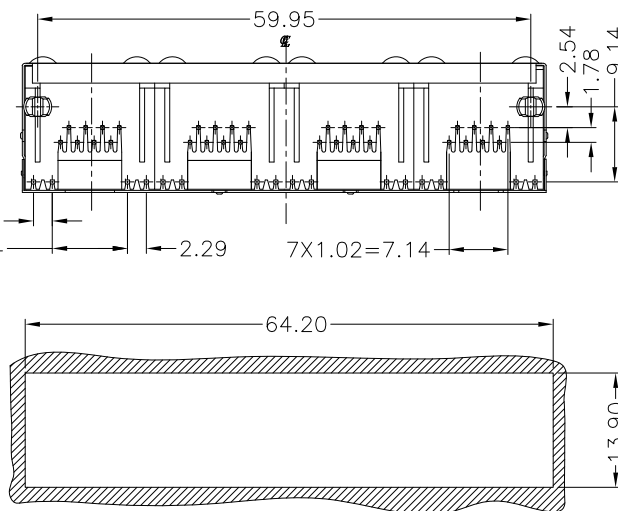
SHELL:30u"MIN. NICKEL PRE-PLATING ALL AREA

3.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68.500 (D) (2)

ORDER INFORMATION :

M R J N - 1 4 T 479 T RS
Matrix-RJ45
F : 10/100
G : 10/100/1000
N : Pure Connector
RS:ROHS
HF:Halogen Free
Industrial temperature
Series Number

11:1X1 ; 21:2X1
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1U:RJ+USB
S:SMD
T:THT

RECOMMENDED
PANEL CUTOUT DIMENSION

NO	VARIETY	QTY	METERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X:X X:X ±0.38 X:XX ±0.25 X:XXX ±0.13 ANGLE: ±3°		DESIGN BY : Phebe Su	DATE : 2016/04/21	PART NAME: RJ45 CONNECTOR 1X4 PORT W/LED
APPROVED BY1: Richard Hsieh		CHECKED BY: Vicky Hsieh	DATE : 2016/04/21	PART NO. MRJN-14T479TRS
APPROVED BY2: Richard Hsieh		DATE : 2016/04/21	MOLD NO. NA	
SCALE:1:1 SIZE:A4		DATE : 2016/04/21	DRAW NO.	
			SHEET NO.	1 OF 1