
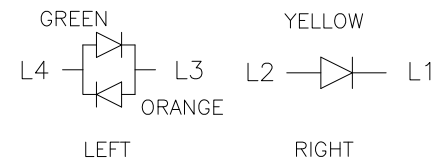
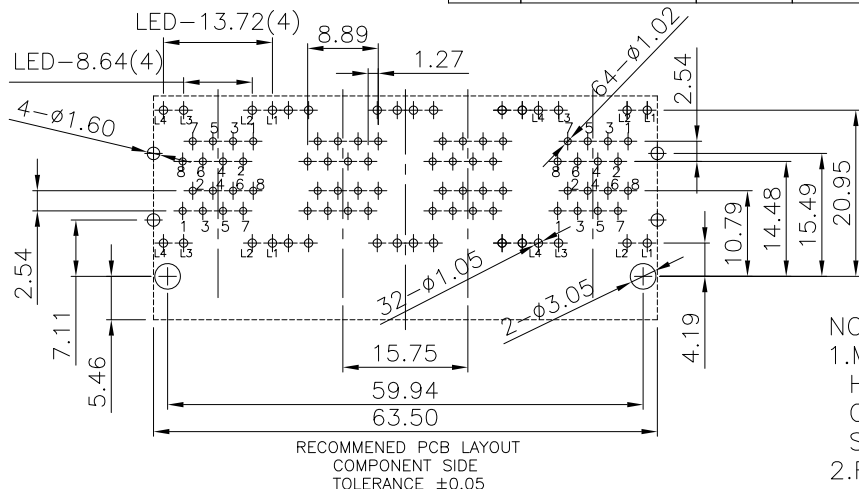
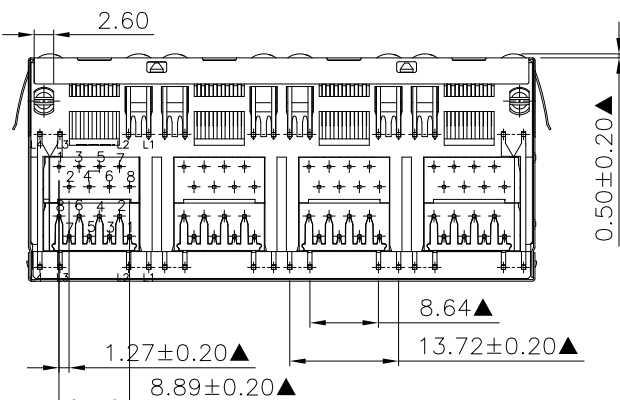
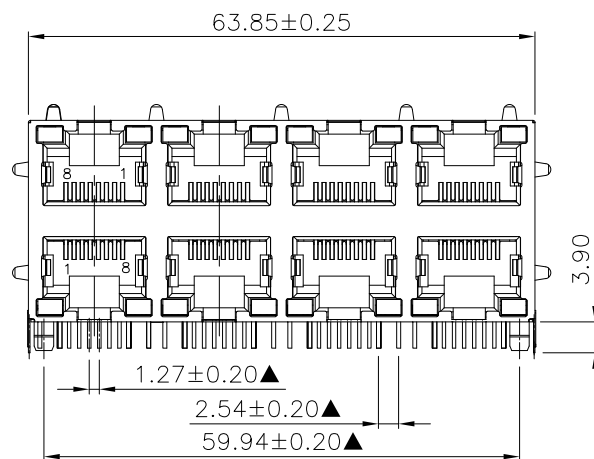


GP Component

1. MECHANICAL:

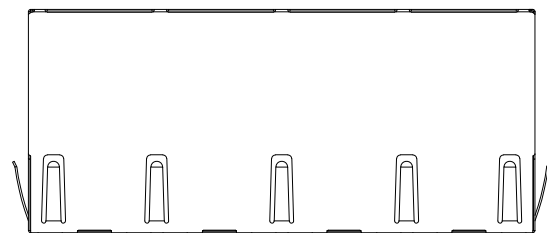

NOTES:

1.MATERIAL:

HOUSING:PA46,UL94V-0,BLACK
CONTACT:PHOSPHOR BORNZE,T=0.35
SHELL:COPPER ALLOY

2.FINISH:

CONTACT:GOLD 3u" ON CONTACT AREA
MATTE TIN PLATING ON SOLDER TAIL
SHELL:NICKEL PLATING OVERALL

4.OPERATING TEMPERATURE:-40°C~+85°C.

5.NOTE ▲ MARK ARE THE KEY SIZES.

6.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

ORDER INFORMATION:

MRJ N - 24 T 975 RS
Matrix-RJ45
F : 10/100
G : 10/100/1000
N : Pure Connector
RS: ROHS
HF: Halogen Free
Series Number
S: SMD
T: THT
11:1X1 ; 21:2X1
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1U:RJ+USB



Matrix Electronics Co.,Ltd

TOLERANCE: X.X X.XX X.XXX X.X ^{±2°}	DESIGN BY : Phebe Su	DATE : 2018/01/07	PART NAME: RJ45 2X4 CONN,W/LED
±0.35 ±0.25 ±0.15 X.X ^{±2°} X.X ^{±1°}	CHECKED BY: Vicky Hsieh	DATE : 2018/01/07	PART NO. MRJN-24T975RS
APPROVED BY1: Richard Hsieh	DATE : 2018/01/07	MOLD NO.	NA
APPROVED BY2: Richard Hsieh	DATE : 2018/01/07	DRAW NO.	
SCALE:1:1	SIZE:A4	SHEET NO.	1 OF 1