
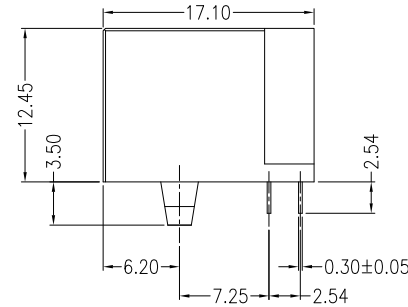


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2018/08/31	Phebe Su

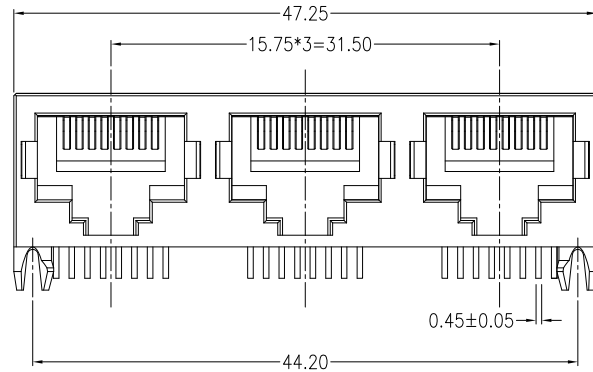

NOTES:

1.MATERIALS:

HOUSING: PBT, UL 94V-0, BLACK.

CONTACTS: T=0.30 mm PHOSPHOR BRONZE,



50u" NICKEL UNDERPLATE

100u" MATTE TIN ON SOLDER TAIL

GOLD 3u" ON CONTACT AREA.

2.OPERATING TEMPERATURE: -40°C ~ +85°C

3.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

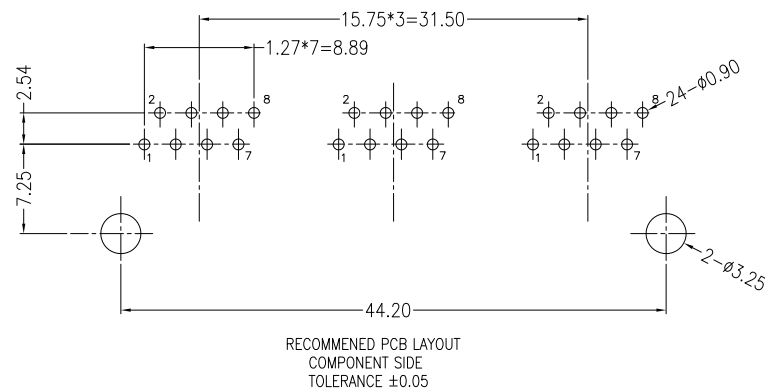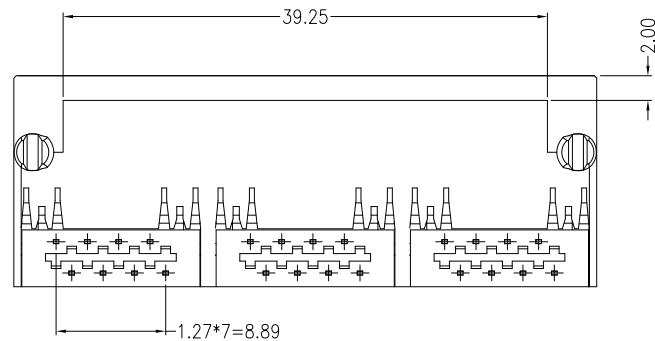

MATRIX PART NO :

M R J N - 1 3 T 9 1 1 R S

Matrix-RJ45

F:10/100

G:10/100/1000

N:Pure connector

RS : ROHS
HF : Halogen Free

Series Number

S : SMD
T : THT

11:1X1 ; 21:2X1

12:1X2 ; 22:2X2

14:1X4 ; 24:2X4

16:1X6 ; 26:2X6

18:1X8 ; 28:2X8

1U:RJ+USB

NO	VARIETY	QTY	METERIAL	REMARK
	 Matrix Electronics Co.,Ltd			
TOLERANCE: X:X ±0.38 X:XX ±0.25 X:XXX ±0.13 ANGLE: ±3°		DESIGN BY : Phebe Su	DATE : 2018/08/31	PART NAME: RJ45 CONNECTOR 1X3 PORT W/O LED
CHECKED BY: Vicky Hsieh		DATE : 2018/08/31	PART NO.	MRJN-13T911RS
APPROVED BY1: Richard Hsieh		DATE : 2018/08/31	MOLD NO.	NA
APPROVED BY2: Richard Hsieh		DATE : 2018/08/31	DRAW NO.	
SCALE:1:1 SIZE:A4			SHEET NO.	1 OF 1