
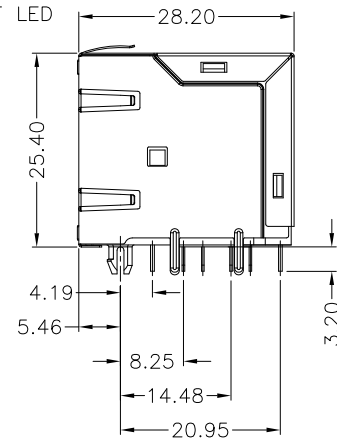


GP Component	1
--------------	---

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2017/11/29	Phebe Su

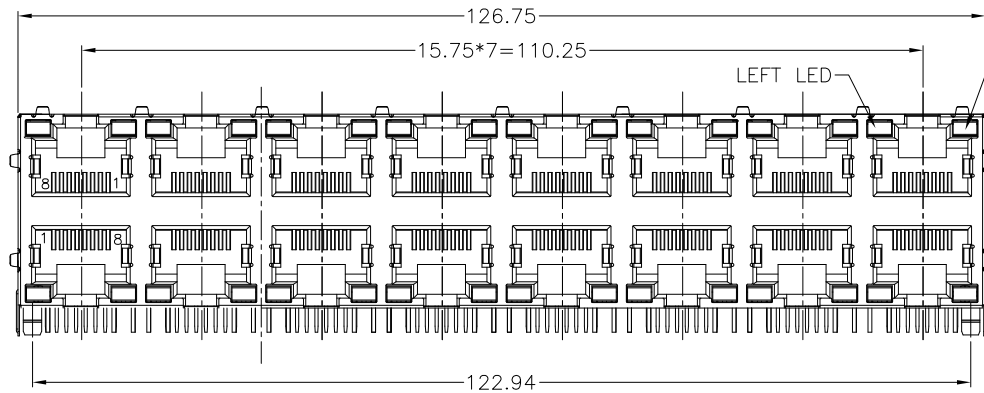

NOTES:

1.MATERIAL:

HOUSING:PA46,UL94V-0,BLACK

CONTACT:PHOSPHOR BORNZE,T=0.35

SHELL:COPPER ALLOY

2.FINISH:


CONTACT:GOLD 3u" ON CONTACT AREA

MATTE TIN PLATING ON SOLDERTAIL

SHELL:NICKEL PLATING OVERALL

4.OPERATING TEMPERTURE:-40°C~+85°C.

5.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

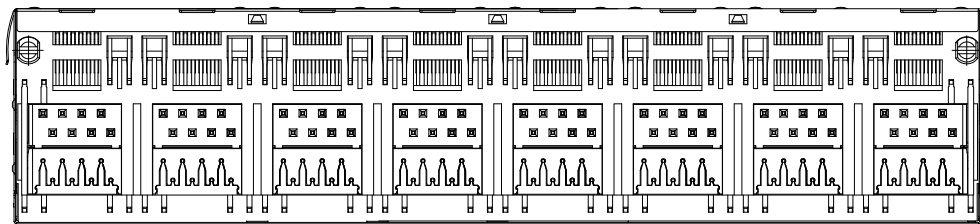

ORDER INFORMATION :

MRJ N - 28 T766 TRS

Matrix-RJ45-

F : 10/100


G : 10/100/1000 -

N : Pure Connector


— RS: ROHS
— HF: Halogen Free
— Industrial temperature
— lumber

— S: SMD
T: THT

11:1X1 ; 21:2X1-
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1U:RJ+USB

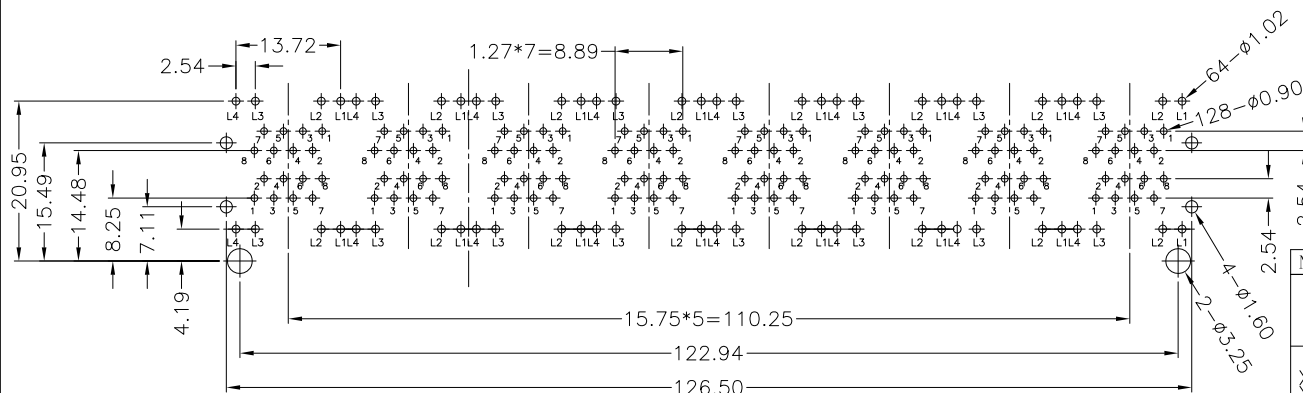

RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05

NO	VARIETY	QTY	MATERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X.X X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3°		DESIGN BY : Phebe Su	DATE : 2017/11/29	
		CHECKED BY: Vicky Hsieh	DATE : 2017/11/29	
		APPROVED BY1: Richard Hsieh	DATE : 2017/11/29	
		APPROVED BY2: Richard Hsieh	DATE : 2017/11/29	
UNIT: mm [inch]			MOLD NO. NA	
SCALE:1:1			DRAW NO. NA	
SIZE:A4			SHEET NO. 1 OF 1	