
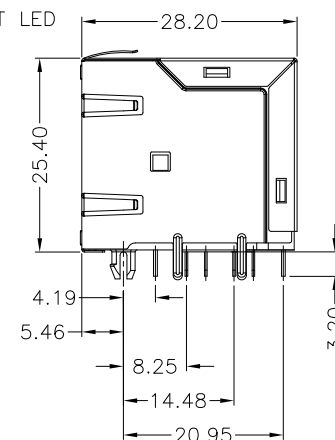


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2016/03/15	Phebe Su

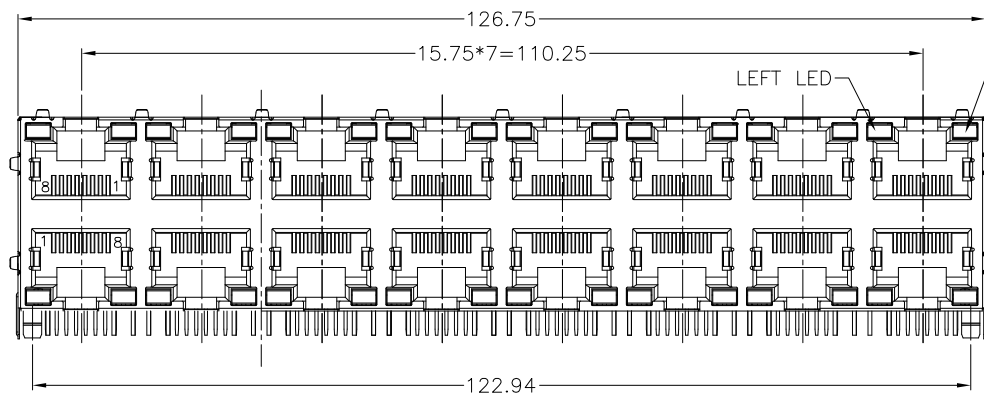

NOTES:

1.MATERIAL:

HOUSING:PA46,UL94V-0,BLACK

CONTACT:PHOSPHOR BORNZE,T=0.35

SHELL:COPPER ALLOY

2.FINISH:


CONTACT:GOLD 3u" ON CONTACT AREA

MATTE TIN PLATING ON SOLDER TAIL

SHELL:NICKEL PLATING OVERALL

4.OPERATING TEMPERATURE:-40°C~+85°C.

5.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

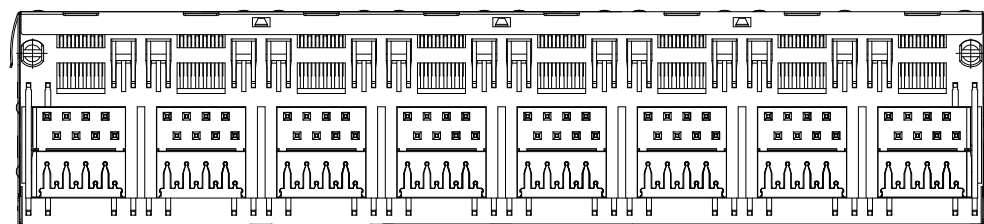

ORDER INFORMATION :

MRJ N - 28 T449 T RS

Matrix-RJ45


F : 10/100

G : 10/100/1000

N : Pure Connector

RS: ROHS
HF: Halogen Free
Industrial temperature

Series Number

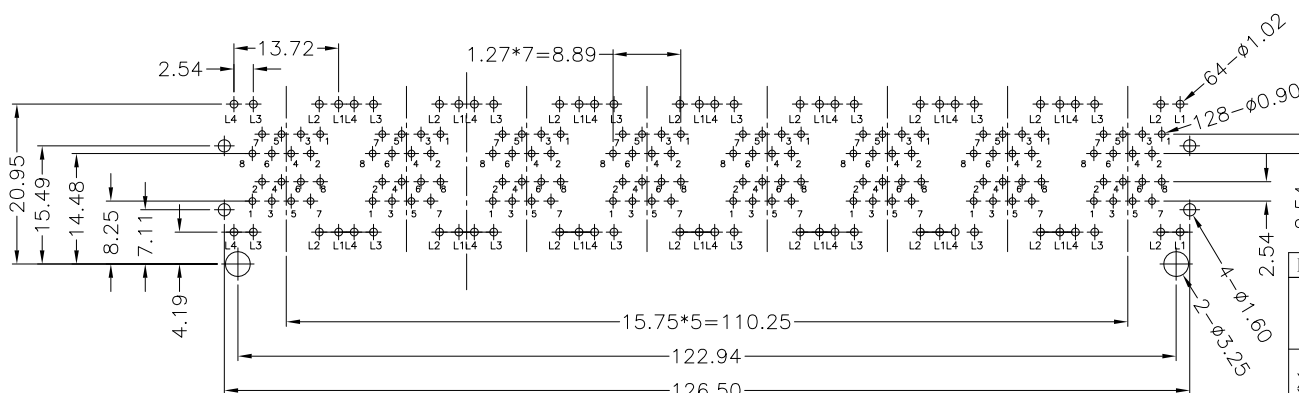S: SMD
T: THT11:1X1 ; 21:2X1
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1U:RJ+USBRECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05

NO	VARIETY	QTY	MATERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X.X: ± 0.38 X.XX: ± 0.25 X.XXX: ± 0.13 ANGLE: $\pm 3^\circ$		DESIGN BY : Phebe Su	DATE : 2016/03/15	PART NAME: RJ45 CONNECTOR 2X8 PORT W/LED, 8PBC, Shielded, Thru-Hole
UNIT: mm [inch]		CHECKED BY: Vicky Hsieh	DATE : 2016/03/15	PART NO. MRJN-28T449TRS
SCALE:1:1 SIZE:A4		APPROVED BY1: Richard Hsieh	DATE : 2016/03/15	MOLD NO. NA
		APPROVED BY2: Richard Hsieh	DATE : 2016/03/15	DRAW NO. NA
				SHEET NO. 1 OF 1