
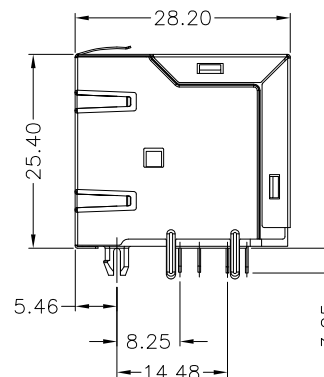


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2017/12/15	Phebe Su
A1			Modify bottom view	2019/08/28	Phebe Su

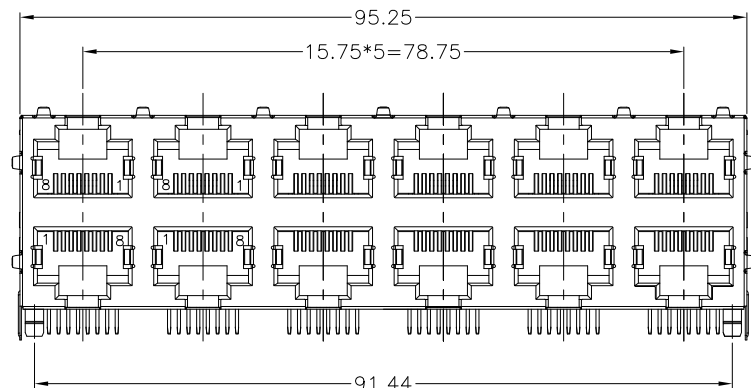

NOTES:

1.MATERIAL:

HOUSING:PA46,UL94V-0,BLACK

CONTACT:PHOSPHOR BORNZE,T=0.35

SHELL:COPPER ALLOY

2.FINISH:



CONTACT:GOLD 3u" ON CONTACT AREA

MATTE TIN PLATING ON SOLDER TAIL

SHELL:NICKEL PLATING OVERALL

4.OPERATING TEMPERATURE:-40°C~+85°C.

5.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

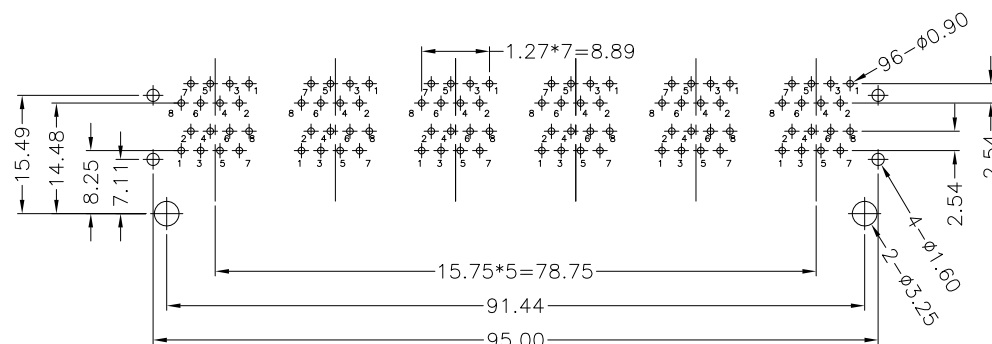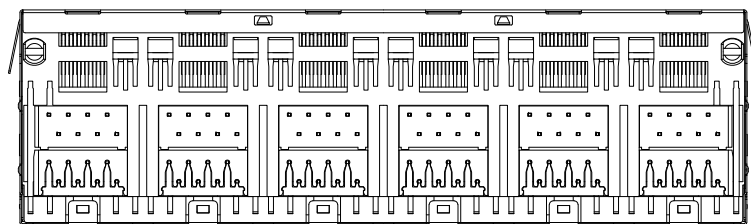RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05

ORDER INFORMATION :

Matrix-RJ45	MRJ N - 26 T 776 T RS	RS : ROHS HF : Halogen Free Industrial temperature Series Number
F : 10/100 G : 10/100/1000 N : Pure Connector	11:1X1 : 21:2X1 12:1X2 : 22:2X2 14:1X4 : 24:2X4 16:1X6 : 26:2X6 18:1X8 : 28:2X8 1U:RJ+USB	S : SMD T : THT



Matrix Electronics Co.,Ltd

TOLERANCE: X:X X:XX X:XXX ANGLE: $\pm 3^\circ$	DESIGN BY : Phebe Su CHECKED BY: Vicky Hsieh APPROVED BY1: Richard Hsieh APPROVED BY2: Richard Hsieh	DATE : 2019/08/28 DATE : 2019/08/28 DATE : 2019/08/28 DATE : 2019/08/28	PART NAME: RJ45 CONNECTOR 2X6 PORT W/O LED, BPBC, Shielded, Thru-Hole PART NO. MRJN-26T776TRS MOLD NO. NA DRAW NO. NA SHEET NO. 1 OF 1
--	---	--	--