

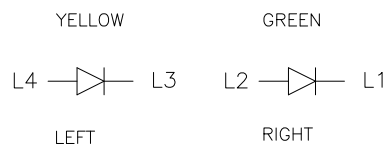
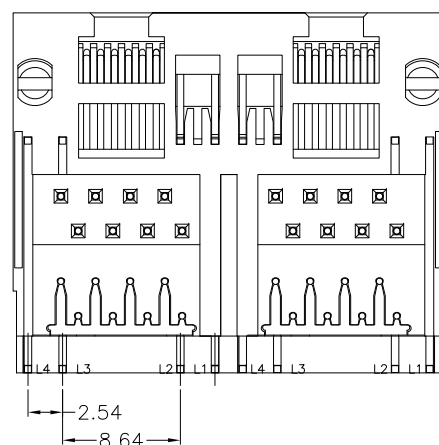
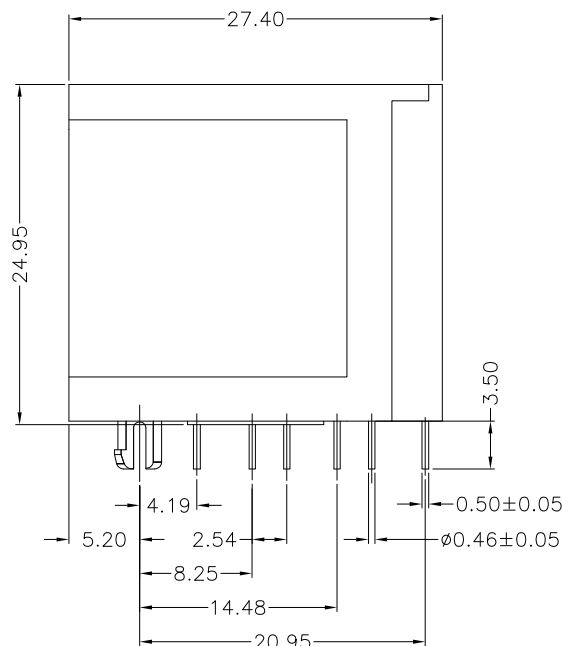
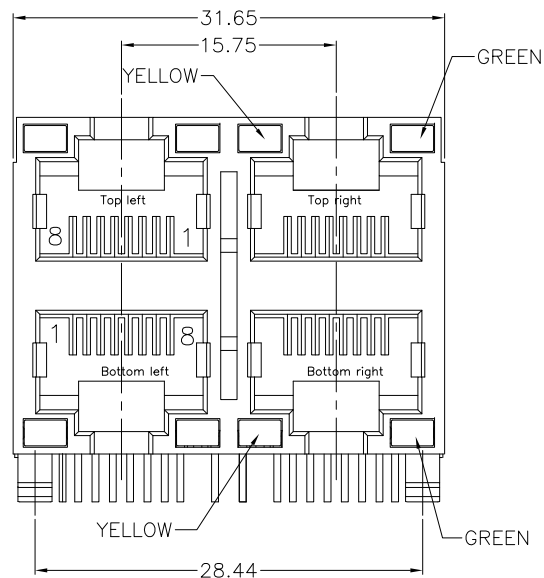


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2017/04/20	Phebe Su

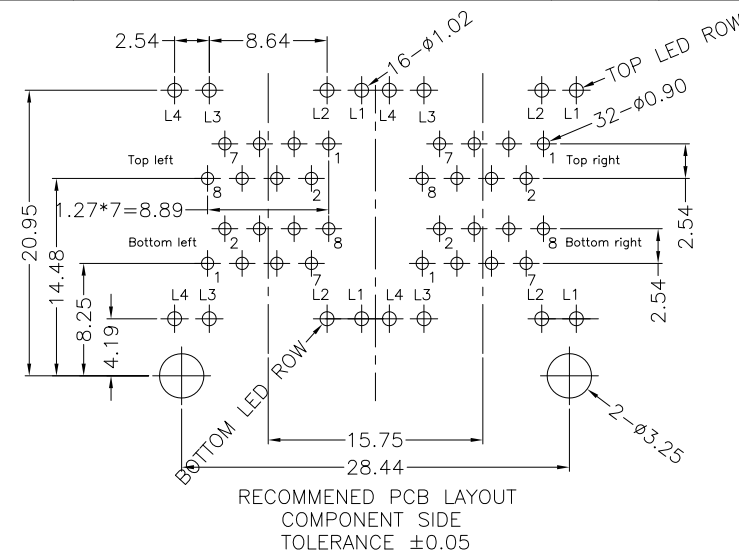


ORDER INFORMATION :

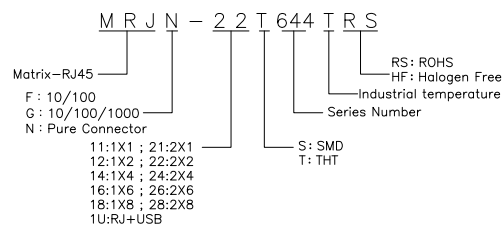

NOTES:

- 1.MATERIAL:
HOUSING:PA46,UL94V-0,BLACK
CONTACT:PHOSPHOR BORNZE,Ø0.46
GOLD FLASH ON CONTACT
- 2.OPERATING TEMPERATURE: -40℃ ~ +85℃
- 3.LED SPEC
- 1)FORWARD VOLTAGE:1.8~2.4V
2)REVERSE CURRENT:10uA MAX
3)PEAK WAVE LENGTH:
GREEN:565~575nm YELLOW:585~590nm
- 4.ELECTRICAL:
- 1)VOLTAGE:125VAC
2)RATING:1.5A
3)CONTACT RESISTANCE:30mΩ MAX
4) INSULATION:500MΩ MIN.
5) DIELECTRIC:
AC 1KV 1mA ,60S BETWEEN ADJACENT CONTACTS

NO	VARIETY	QTY	MATERIAL	REMARK
 Matrix Electronics Co.,Ltd				
TOLERANCE: X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3°		DESIGN BY : Phebe Su	DATE : 2017/04/20	PART NAME: RJ45 CONNECTOR 2X2 PORT W/LED, 8P8C, W/O Shielded
		CHECKED BY: Anson Cheng	DATE : 2017/04/20	PART NO. MRJN-22T644TRS
		APPROVED BY1: Richard Hsieh	DATE : 2017/04/20	MOLD NO. NA
UNIT: mm [inch]		APPROVED BY2: Richard Hsieh	DATE : 2017/04/20	DRAW NO.
SCALE:1:1	SIZE:A4		SHEET NO.	1 OF 1