
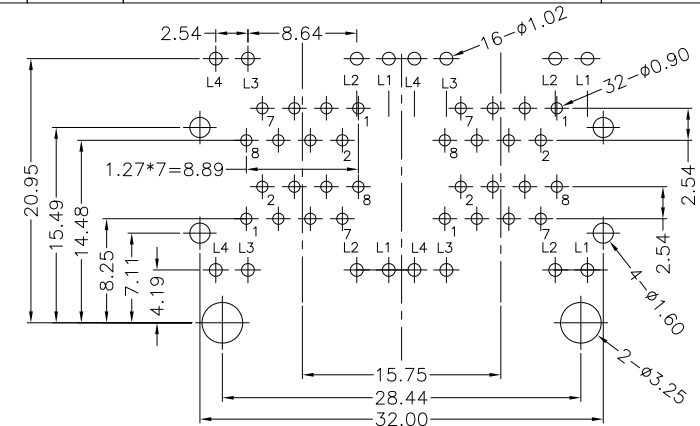
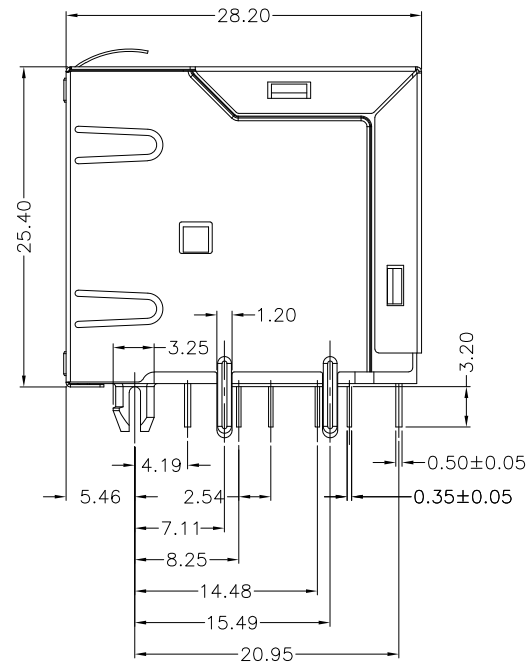


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2018/10/03	Phebe Su

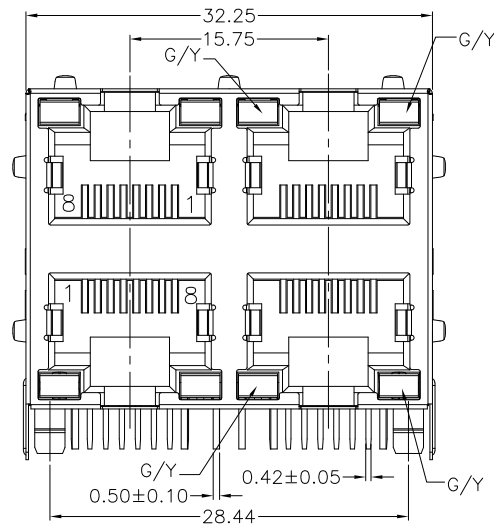

RECOMMENDED PCB LAYOUT(TOP SIDE)
TOLERANCE ±0.05

NOTES:

1.MATERIAL:

HOUSING:PA46,UL94V-0,BLACK

CONTACT:PHOSPHOR BORNZE,T=0.35, GOLD 3u" ON CONTACT AREA,
MATTE TIN ON SOLDER TAIL.



SHELL:COPPER ALLOY, NICKEL 30u" OVERALL

2.OPERATING TEMPERATURE: -40℃ ~ +85℃

3.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F

ORDER INFORMATION:

Matrix-RJ45
F:10/100
G:10/100/1000
N:Pure Connector
11:1X1 ; 21:2X1
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1U:RJ+USB
MRJ N - 22 T 941 RS
RS: ROHS
HF: Halogen Free
Series Number
S: SMD
T: THT

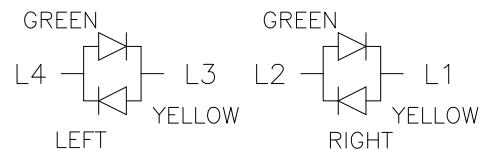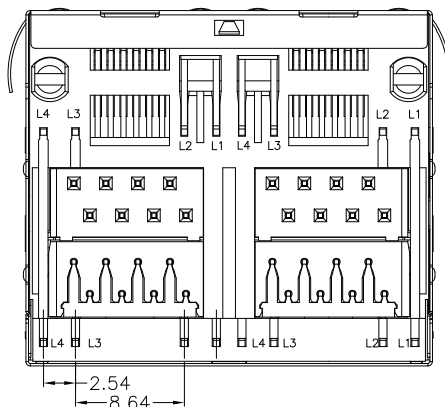

Matrix Electronics Co.,Ltd

TOLERANCE: X:X X:XX X:XXX X:±2° X:X°±1°	DESIGN BY : Phebe Su CHECKED BY: Janice Liu APPROVED BY1: Richard Hsieh APPROVED BY2: Richard Hsieh	DATE : 2018/10/03 DATE : 2018/10/03 DATE : 2018/10/03 DATE : 2018/10/03	PART NAME: RJ45 2X2 CONN,W/LED PART NO. MRJN-22T941RS MOLD NO. NA DRAW NO. SHEET NO.
UNIT: mm [inch] SCALE:1:1 SIZE:A4			1 OF 1