
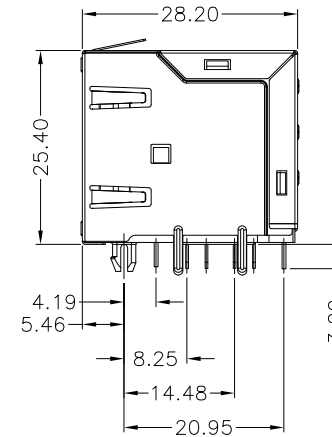


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2019/09/05	Phebe Su

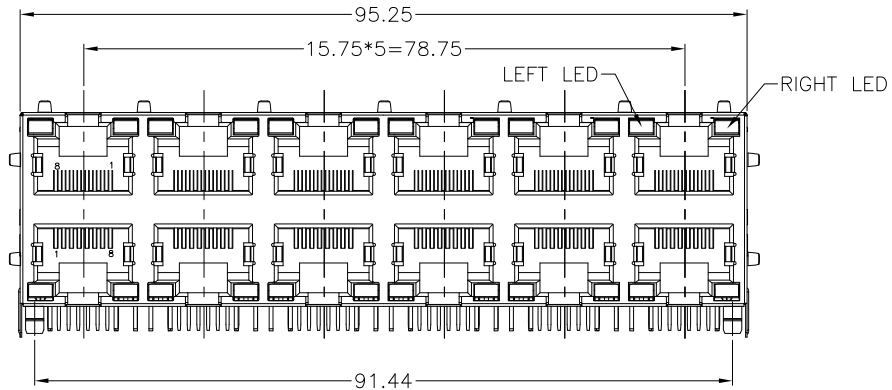

NOTES:

1.MATERIAL:

HOUSING:PA46,UL94V-0,BLACK

CONTACT:PHOSPHOR BORNZE,T=0.35

SHELL:COPPER ALLOY

2.FINISH:



CONTACT:GOLD 3u" ON CONTACT AREA

MATTE TIN PLATING ON SOLDER TAIL

SHELL:NICKEL PLATING OVERALL


4.OPERATING TEMPERATURE:-40°C~+85°C.

5.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

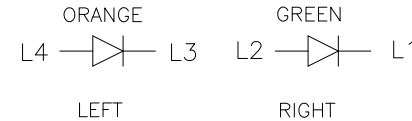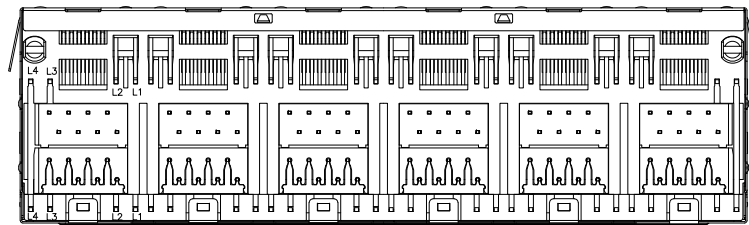

ORDER INFORMATION :

Matrix-RJ45	MRJ N - 26 T 1062 RS	RS: ROHS HF: Halogen Free
F: 10/100		
G: 10/100/1000		
N: Pure Connector		
11:1X1 ; 21:2X1		
12:1X2 ; 22:2X2		
14:1X4 ; 24:2X4		
16:1X6 ; 26:2X6		
18:1X8 ; 28:2X8		
1U:RJ+USB		
S: SMD		
T: THT		

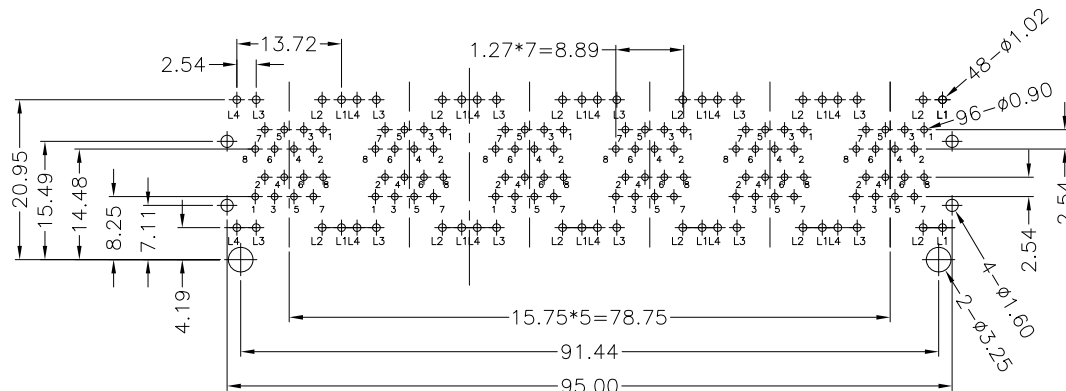

RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05



Matrix Electronics Co.,Ltd

TOLERANCE: X.X X.XX X.XXX X.XXX ANGLE: $\pm 3^\circ$	DESIGN BY : Phebe Su	DATE : 2019/09/05	PART NAME: RJ45 CONNECTOR 2X6 PORT W/LED, 8PBC, Shielded, Thru-Hole
UNIT: mm [inch]	CHECKED BY: Vicky Hsieh	DATE : 2019/09/05	PART NO. MRJN-26T1062RS
SCALE:1:1	APPROVED BY1: Richard Hsieh	DATE : 2019/09/05	MOLD NO. NA
SIZE:A4	APPROVED BY2: Richard Hsieh	DATE : 2019/09/05	DRAW NO. NA
			SHEET NO. 1 OF 1