



Feature



- Designed for long haul gigabit Ethernet 1000 BASE-T, full duplex applications.
- Supports 4 pairs of category 5 UTP cable.
- Cable interface for isolation and low common mode emissions.
- Compliant with IEEE 802.3af standard for 1000 BASE-T.
- Comply with RoHS & Halogen Free requirements.
- Operating temperature range: 0 to +70 .
- Storage temperature range: -25°C to +125°C.


Electrical Specifications@25°C

Part Number	Turns Ratio (±5%)		OCL(uH Min) @100KHz/0.1V With 8mA DC Bias	Cross talk Attenuation (dBMin)			HI-POT (Vrms)
	TX	RX		30MHz	60MHz	100MHz	
ML24S09HF	1CT:1CT	1CT:1CT	350	-45	-40	-35	1500

Continue


Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)@Load 100 Ω					DCMR (dB Min)		
		1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz
ML24S09HF	-1.0	-18	-14.4	-13.1	-12	-10	-40	-35	-30

Schematic

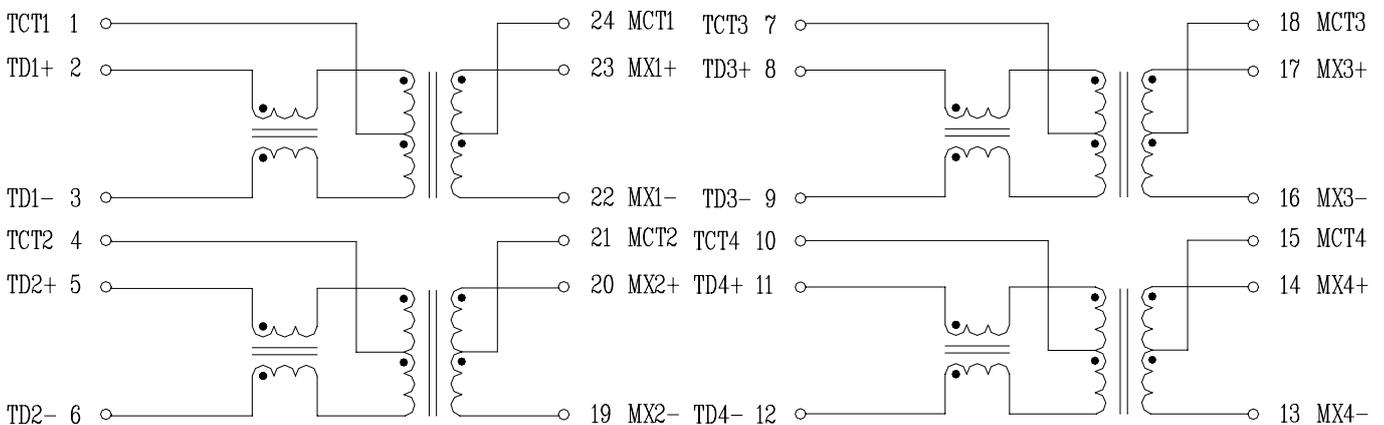



Mechanical

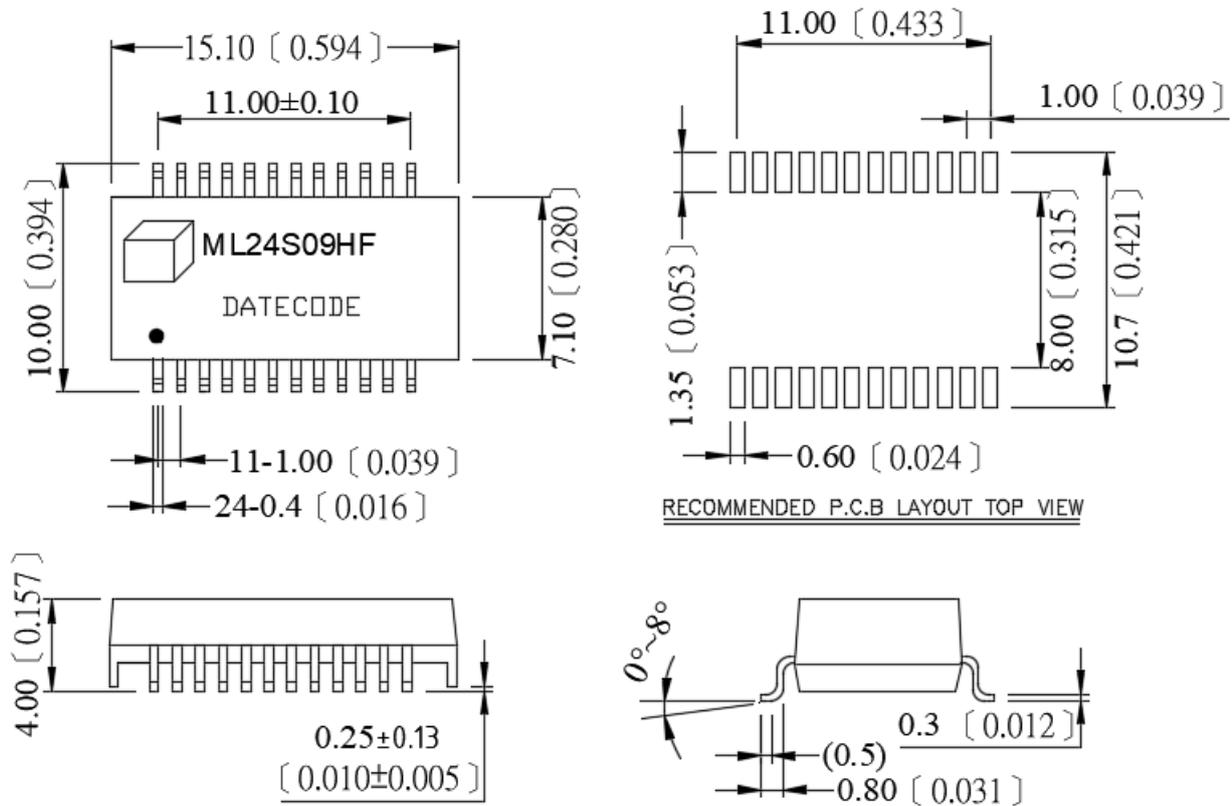

Dimension:mm

Unless otherwise specified,tolerances:±0.25(mm)

Data sheet subject to change without notice