




Feature

- Designed to meet IR 255°C peak requirement.
- ROHS Compliant
- Operating temperature 0°C to +70°C
- Storage temperature range: -25°C to +85°C.

Electrical Specifications @ 25°C


Part Number	Turn Ratio @120KHz0.2V	OCL @150KHz0.1V	DCR		Hi-Pot
		1-2:3-4:8-7:6-5	8-5-Short6-7	8-5Short6-7	1-4Short2-3
ML08S03RS	1:1:1:1	3.5mH-6.5mH	1.0Ω Max	1.0Ω Max	1500V/1mA/1S

Schematic

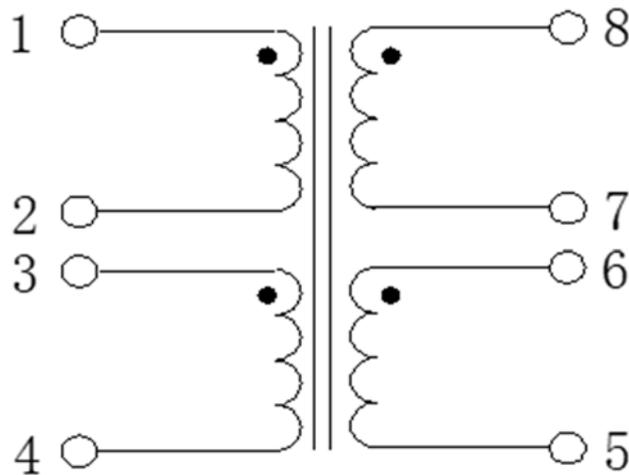



Mechanical

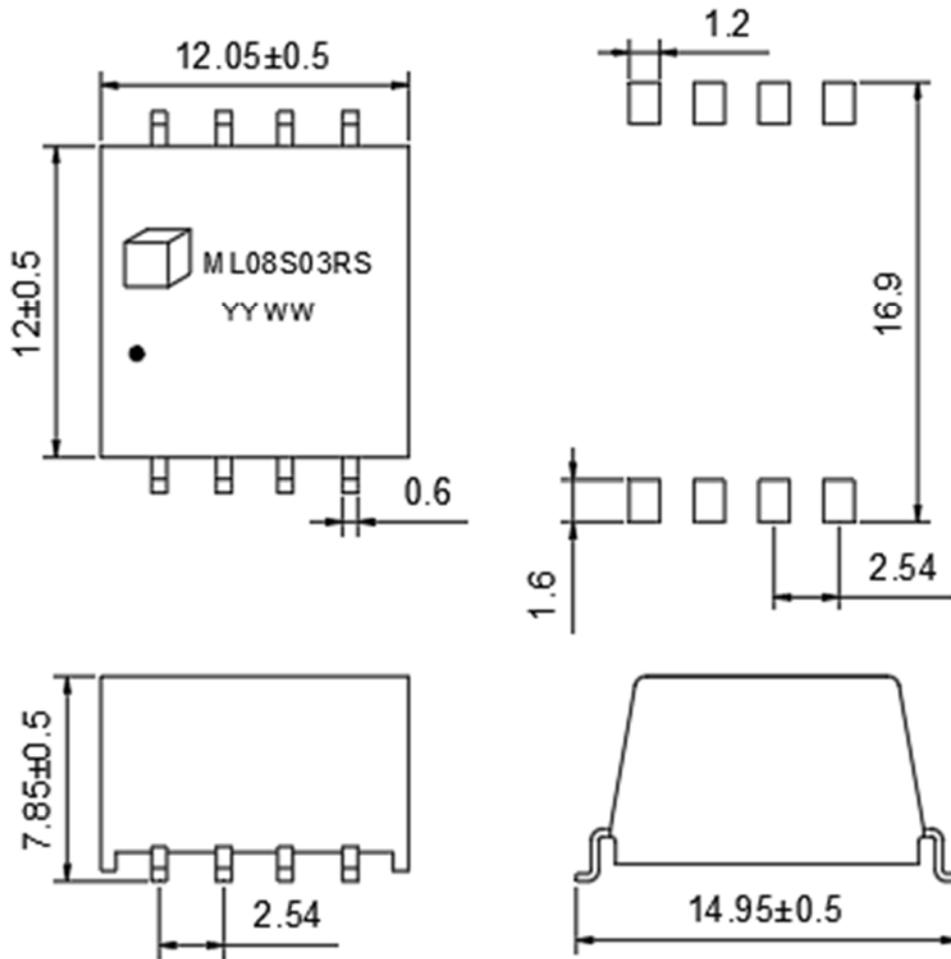


Dimension:mm
Unless otherwise specified,tolerances: ± 0.25 (mm)
Data sheet subject to change without notice



Packing

Model NO.	ML08S03RS	Model Name	Transformer
Q'ty:		Date.	2021-11-03

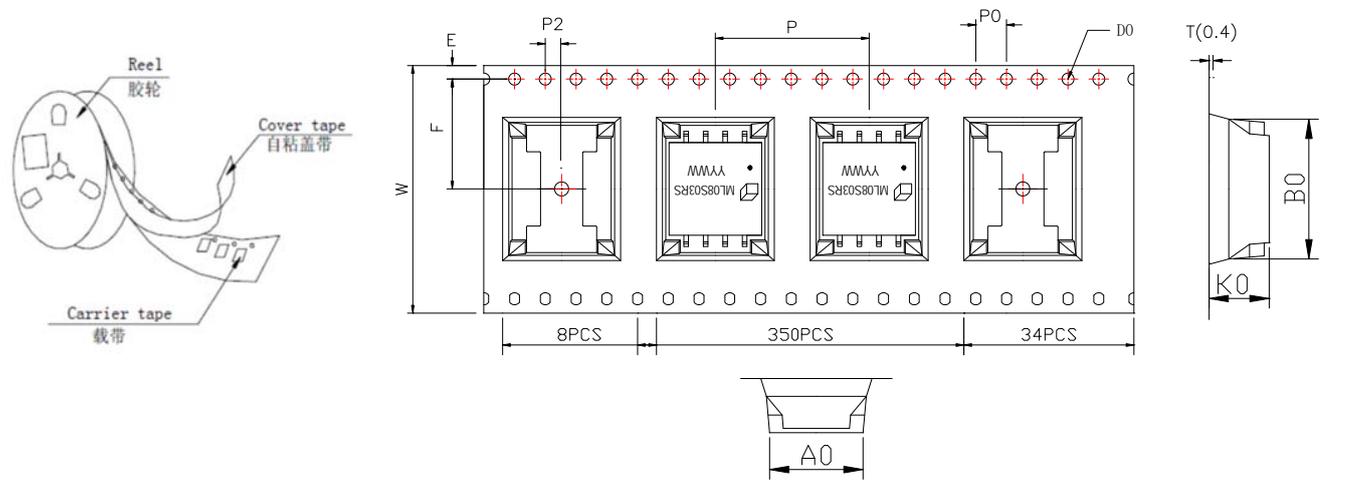

ITEM	W	A ₀	B ₀	K ₀	P	F	E	D ₀	D ₁	P ₀	P ₂	T
DIM	32.0 ^{+0.3} _{-0.1}	12.3 ^{+0.1} _{-0.1}	15.5 ^{+0.1} _{-0.1}	8.90 ^{+0.1} _{-0.1}	20.0 ^{+0.1} _{-0.1}	14.2 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}	0.40 ^{+0.05} _{-0.05}

装箱步骤:


产出每卷数	每卷数量	350PCS	X	每袋卷数	1	350PCS
成品每板数	每袋数量	350PCS	X	每箱袋数	8	2450PCS

单颗净重:


单箱净重:

单箱毛重:

装箱示意图:

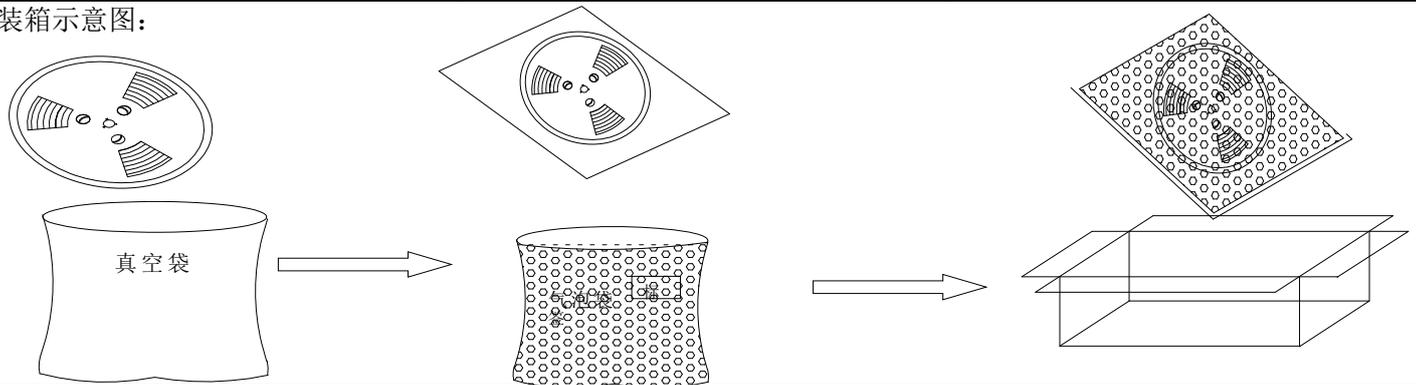

外箱唛头:

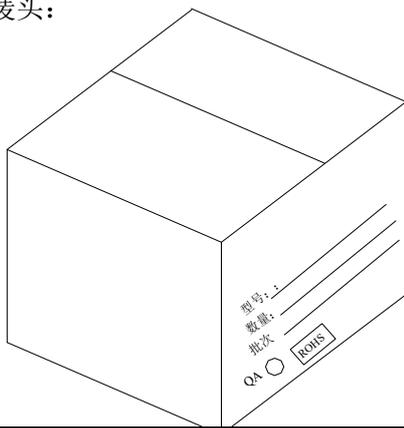

备注事项:

- 1、产品方向摆放一致，胶格带、封带不能有污染；
- 2、前空 8 格，后空 19 格不要放产品，但需用上带封住；
- 3、封带上盖带不可超出胶格轮的边缘（不可盖到胶格轮）；装好的胶格轮不可松懈；
- 4、放入真空袋，同时放入干燥剂抽真空封好，贴（成品 PASS 标签）填写型号、数量、批号、周期；
- 5、套入气泡袋，透明胶纸封口；