




Feature

- **RoHS Compliance Product**
- **Operating temperature range:-40°C to +125°C**
- **Storage temperature range:-25°C to +85°C**


Electrical Specifications @ 25°C						
Part Number	Turn Ratio	OCL @1KHz 0.25V	Isat	DCR (mΩ MAX)		Hi-POT 5mA,3SEC COIL TO COIL
				1-4	2-3	
MCM0431	1:1±2%	25mH MIN	1.0A MAX	/		1500VAC

Schematic

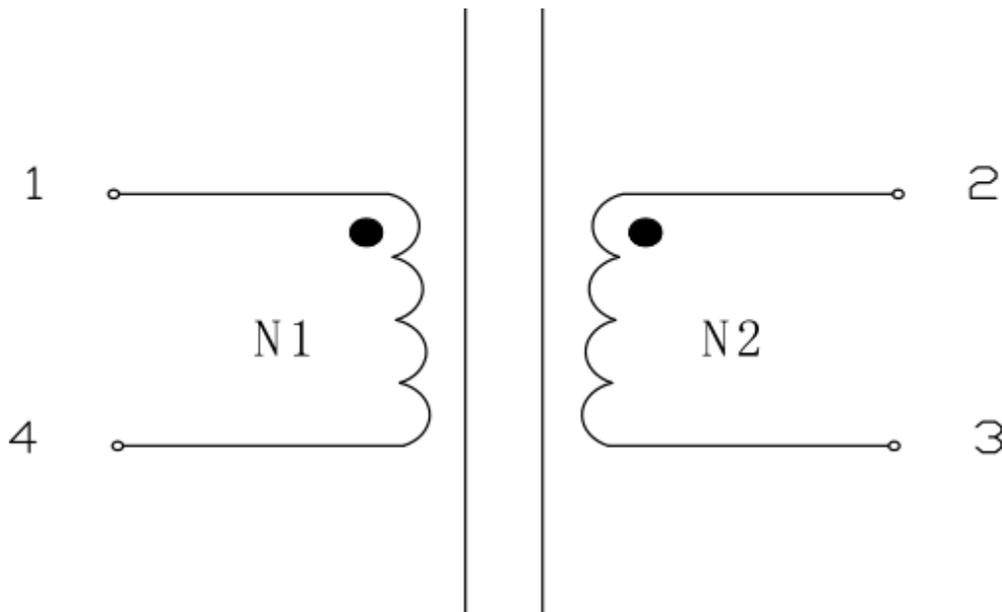



Mechanical

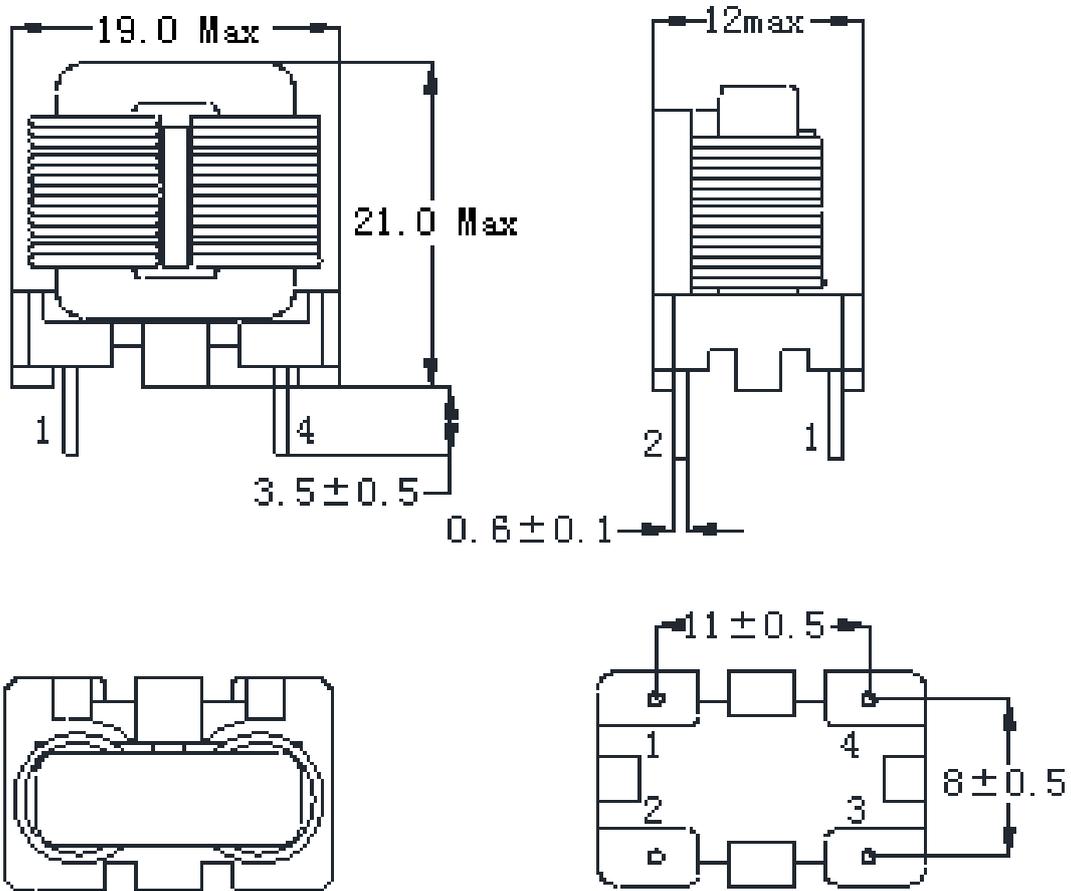

NOTE:

- 1、 Dimensions: mm ;
- 2、 Unless otherwise specified to tolerances: ± 0.25 (mm) ;
- 3、 Isat DC current (A) that will cause Lo to drop approximately 25mH MIN