





Feature

- Flyback Transformer
- RoHS Compliance Product
- Surface Mount Device Providing Compact Footprint
- Operating temperature range:-40°C to +125°C (Include ambient temperature)

Electrical Specifications @ 25°C





Part Number	Turns Ratio		OCL @10KHz 0.1V		LL @1MHz 0.1V	DCR			Hi-Pot (5mA 1Sec)
	3-4: 7,8-9,10	3-4:2-1	3-4	3-4, I=0.65A	3-4 (2+1+7+8+9+ 10 short)	3-4	2-1	7,8-9,10	PRI. TO SEC.
MFT1006	1:0.262±2%	1:0.677±2%	155uH ±10%	139.5uH MIN.	3.6uH max	0.414Ω max	0.822Ω max	0.06Ω max	1500 VAC

Schematic

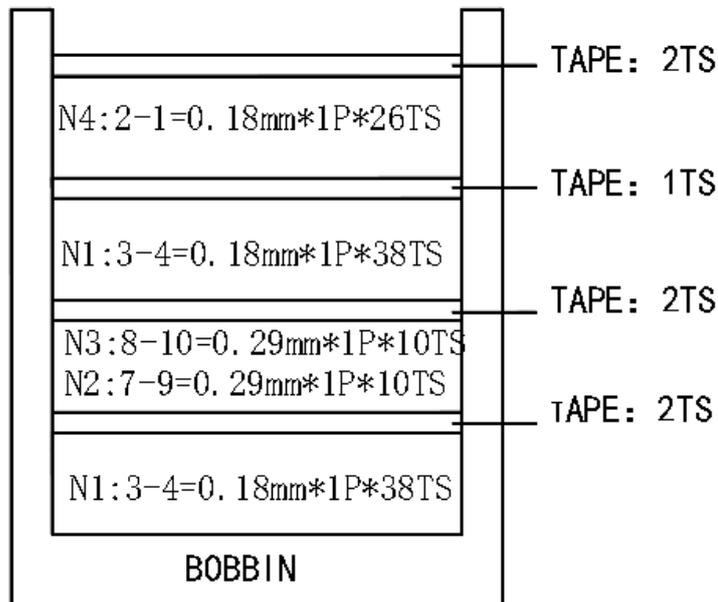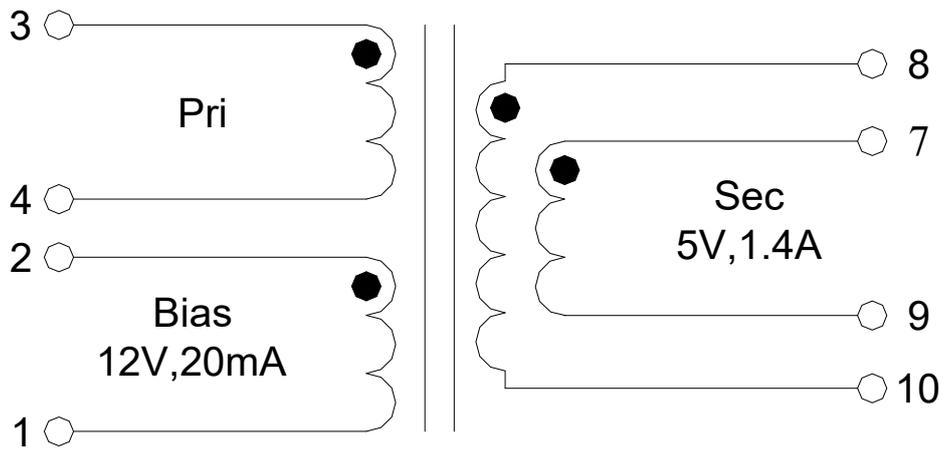



Mechanical

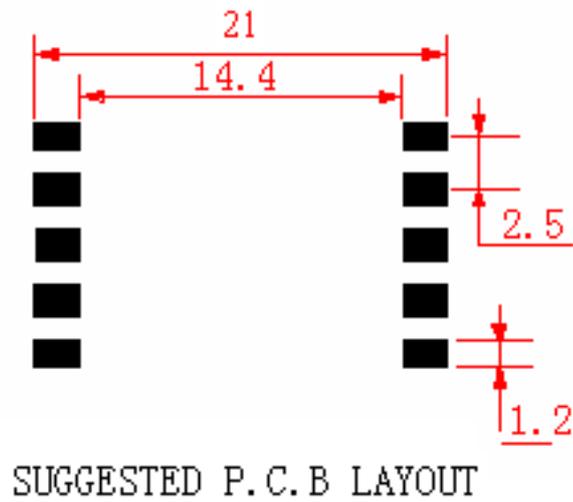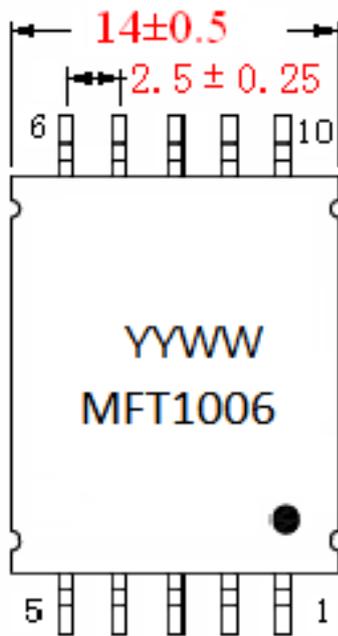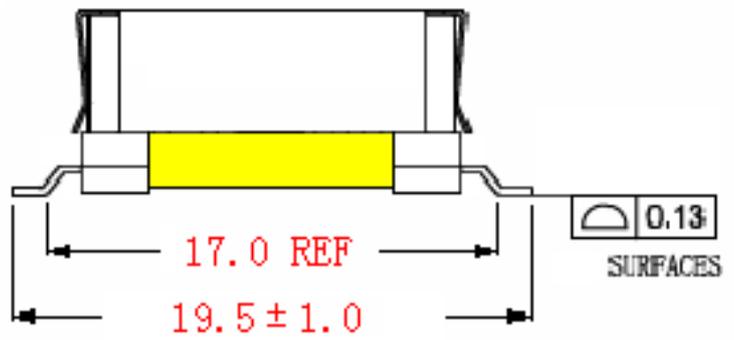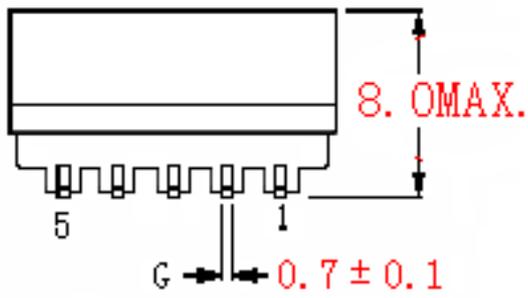

1. 产品中柱点胶

Dimension (mm) : Unless otherwise specified, all tolerances are ±0.25mm