




Feature

- Designed to meet IR 255°C peak requirement
- RoHS Compliant
- Operating temperature range:-40°Cto+130°C
- Storage temperature range:-40°Cto+125°C
- Operating Frequency : 50KHz


| Electrical Specifications @ 25°C |            |                 |          |     |          |                 |
|----------------------------------|------------|-----------------|----------|-----|----------|-----------------|
| Part Number                      | Turn Ratio | OCL @10KHz 0.1V | DCR      |     |          | Hi-Pot          |
|                                  |            | 1-2:2-3:5-6     | 5-6      | 1-2 | 2-3      | 5-6             |
| MT0623                           | 1:1:1±5%   | 1140uH MIN      | 0.75ΩMax |     | 0.85ΩMax | 3000VAC/1mA/60S |

Schematic

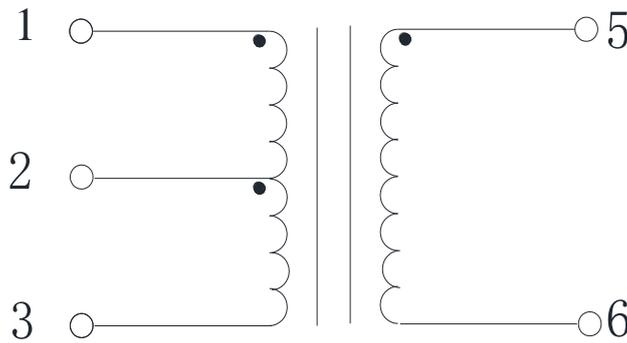



Mechanical

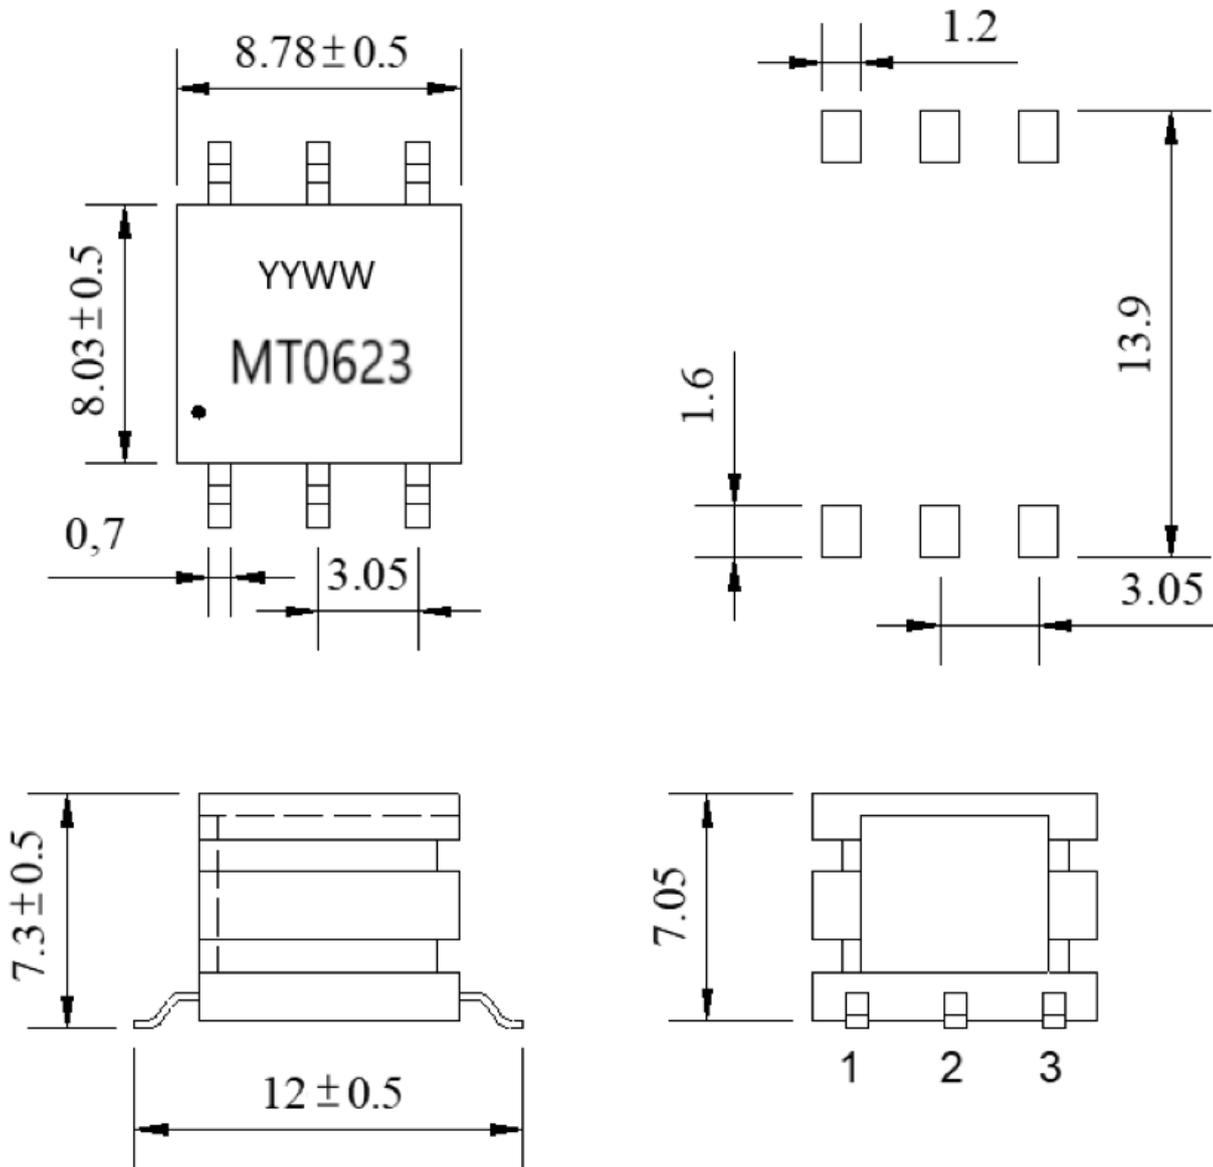

Dimension:mm

Unless otherwise specified,tolerances: $\pm 0.25$ (mm)

Data sheet subject to change without notice