




Feature

- RoHS Compliance Product
- Surface Mount Device Providing Compact Footprint
- Operating temperature range:-40°C to +125°C(Include ambient temperature)





Electrical Specifications @ 25°C								
Part Number	Turns Ratio		OCL @100KHz 0.1V	LL @100KHz 0.1V	DCR			Hi-Pot (5mA 3Sec)
	2-1:8-5:4-3	2-1:4-3	2-1	2-1 (short other PINS)	2-1	8,7-5,6	4-3	PRI. TO SEC.
MT0809	3.43:1±0.3Ts	3±0.3Ts	24uH ±10%	3.5uH MAX	150m Ω Max	30m Ω Max	170m Ω Max	1500 VAC

Schematic

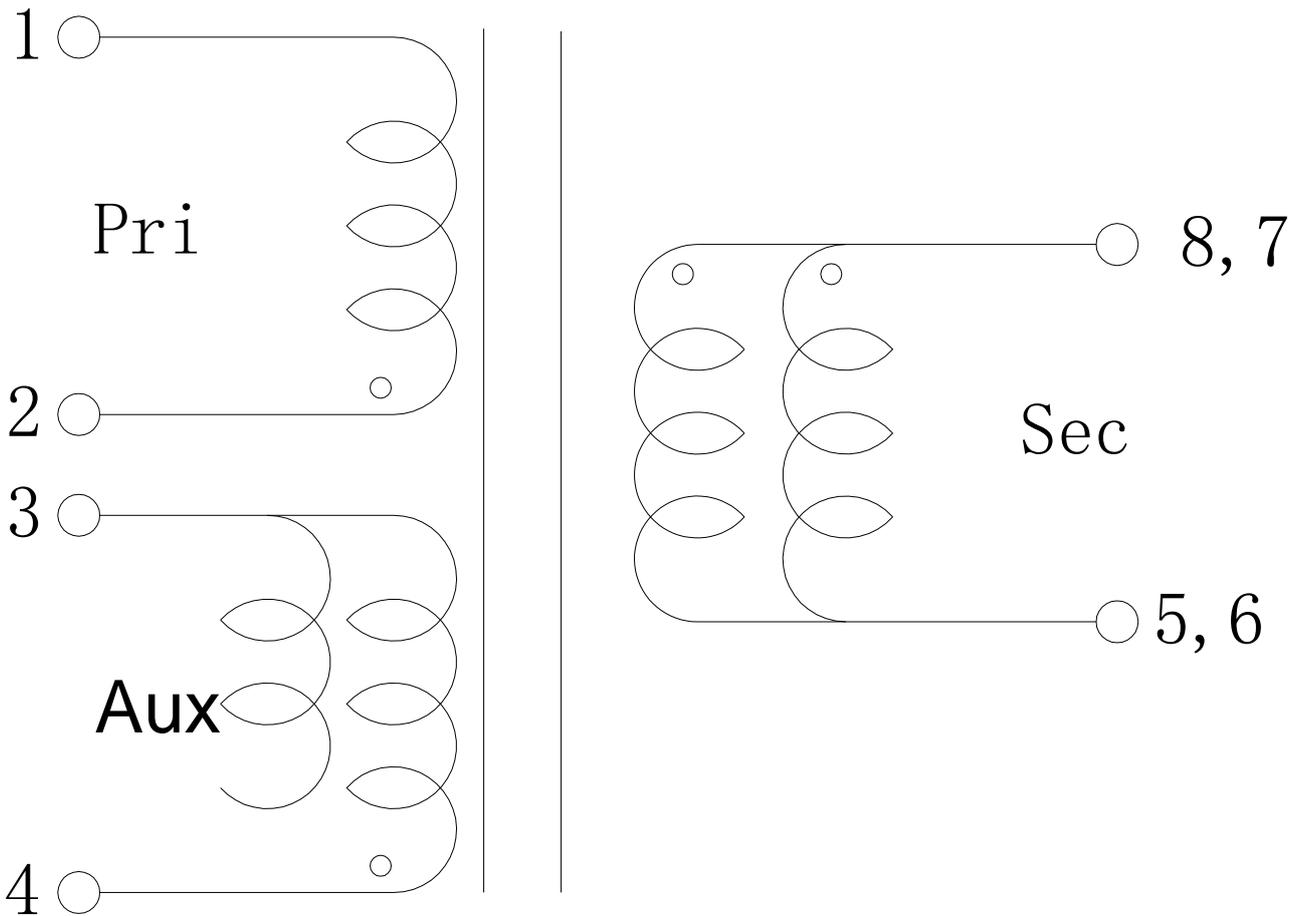



Mechanical

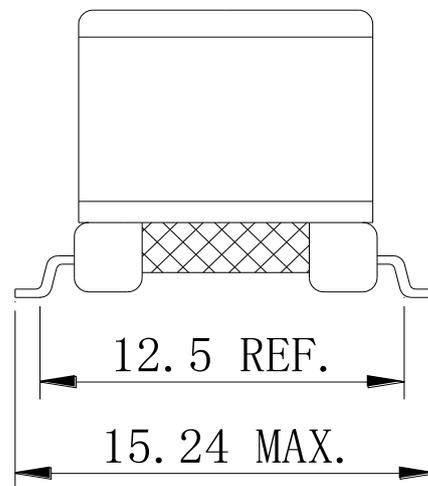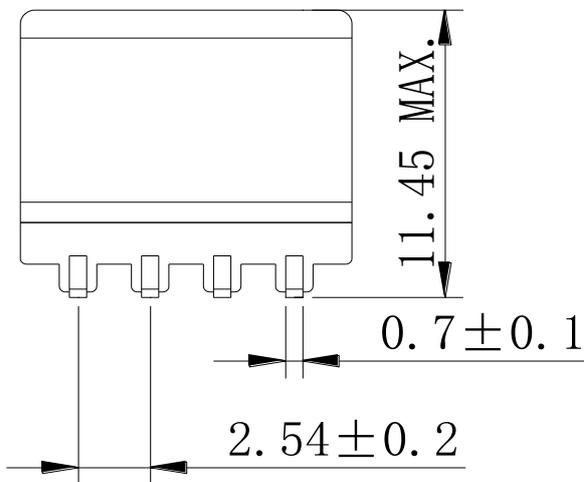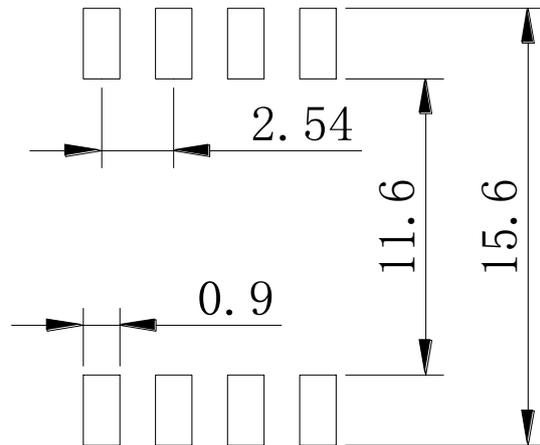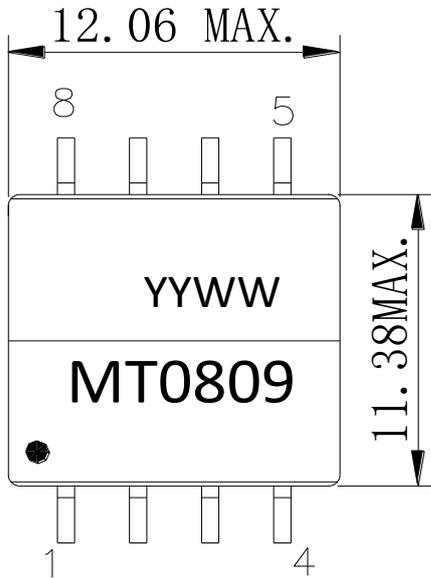

Dimension: mm(inch) Unless otherwise specified , all tolerance are +/-0.25(0.01)