




**Feature**

- ROHS Compliant Product
- Operating temperature range: -40°C to +125°C

Electrical Specifications @ 25°C				
序号	项目	脚位	规格	测试条件
1	电感:	1-2	100.5μH±10%	TH2819 @100kHz,0.1V
2	漏感	1-2 (Short other pins)	1.0μH Max.	TH2819 @100kHz,0.1V
3	直流电阻	1-2	110mΩ Max.	TH2512B
		4-5	510mΩ Max.	TH2512B
		6,7-10,9	40mΩ Max.	TH2512B
4	圈比	1-2:4-5	1:0.52 ±3%	TH2819
		1-2:6,7-9,10	1:0.56±3%	TH2819
5	耐压	初级对次级	1500V AC/5mA/3S	2670





**Schematic**

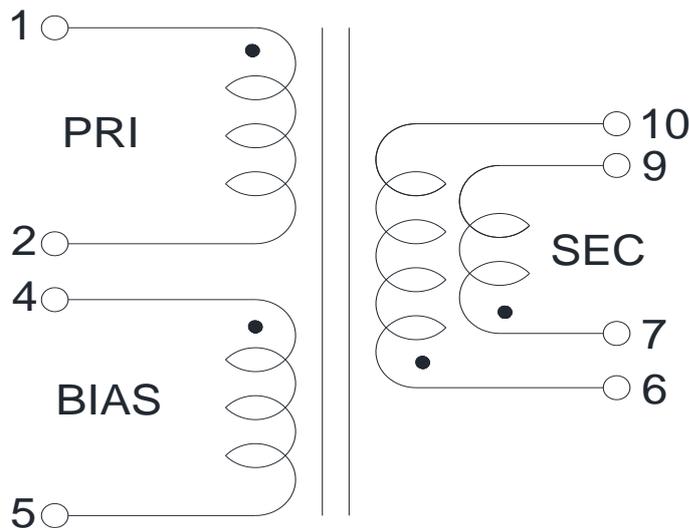

Customer to tie terminals  
6&7 and 9&10 on PC board



Mechanical

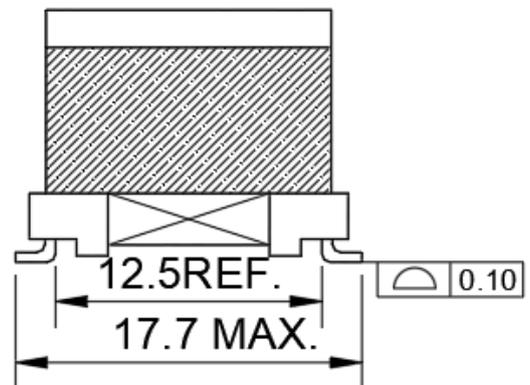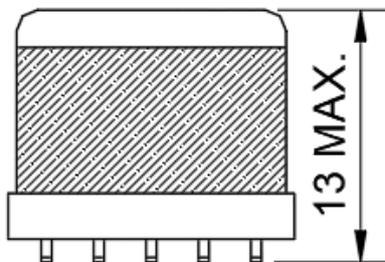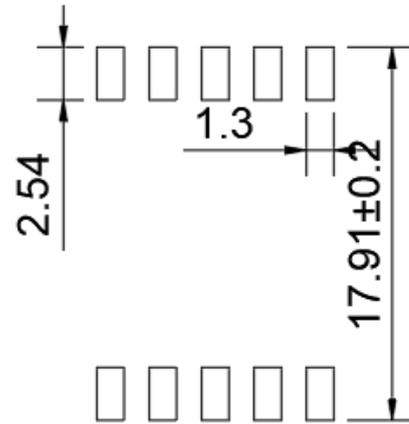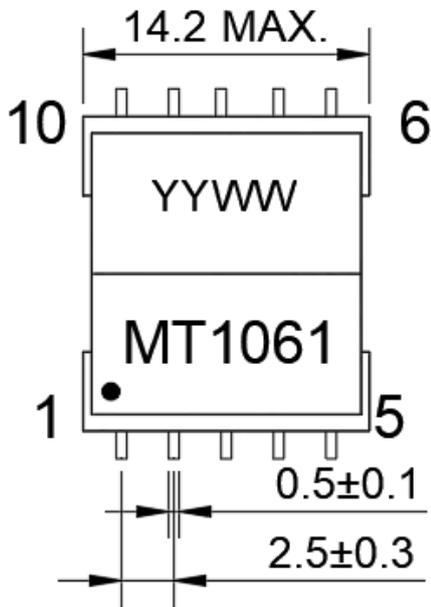

NOTE:

- 1、Dimensions:mm;
- 2、 Unless otherwise specified,tolerances:±0.25(mm);