




### Feature

- RoHS Compliance Product

Operating temperature range: -40° C to +125° C

Electrical Specifications @ 25°C				
序号	项目	脚位	规格	测试条件
1	电感	3-4	127uH±10%	TH2819 @100kHz,0.1V
2	漏感	3-4 (1,2,7,8,9,10short)	1.5uH Max	TH2819 @100kHz,0.1V
3	直流电阻	3-4	220mΩ	Max
		2-1	155mΩ	Max
		7,8-9,10	20mΩ	Max
4	圈比	3-4:2-1	1.88:1±3%	TH2819 @20kHz,1V
		3-4:7,8-9,10	4.29:1±3%	TH2819 @20kHz,1V
5	耐压	PRI-SEC	1500VAC/5mA/3S	TH2670

### Schematic

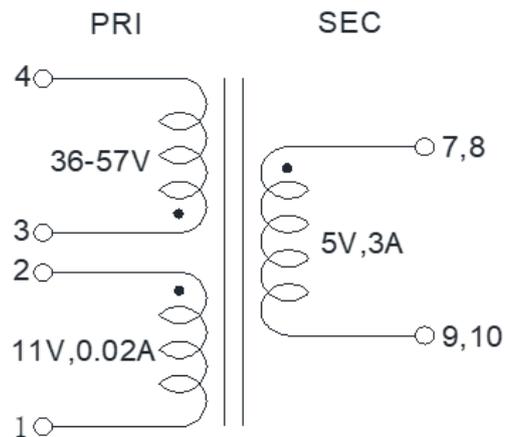


● START

### 线路图

No of Pin	Wire Spec	Turns	TAPE
3-4	0.20*1P	30	2L
7,8-9,10	0.25*4P	7	1L
3-4	0.20*1P	30	2L
2-1	0.20*2P	16	2L



Mechanical


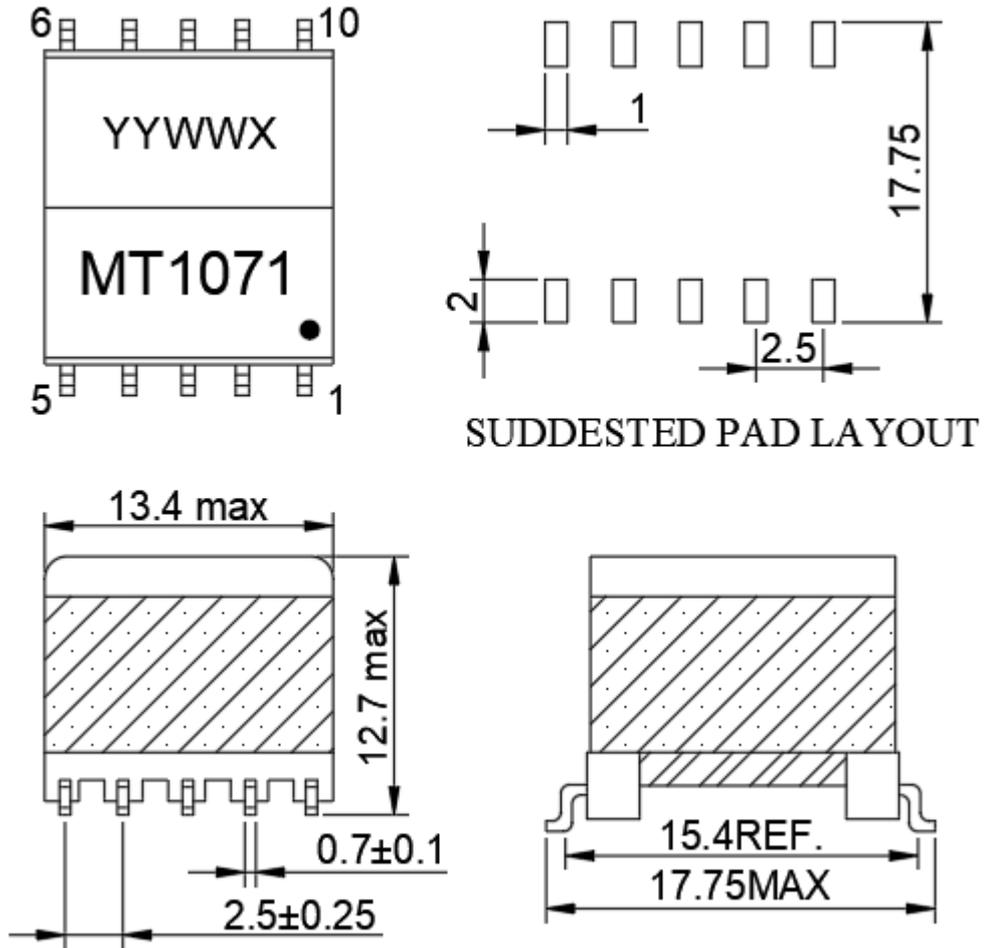


备注:

1、未标注尺寸公差:±0.25(mm);



### PACKING

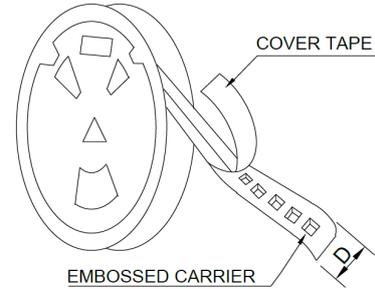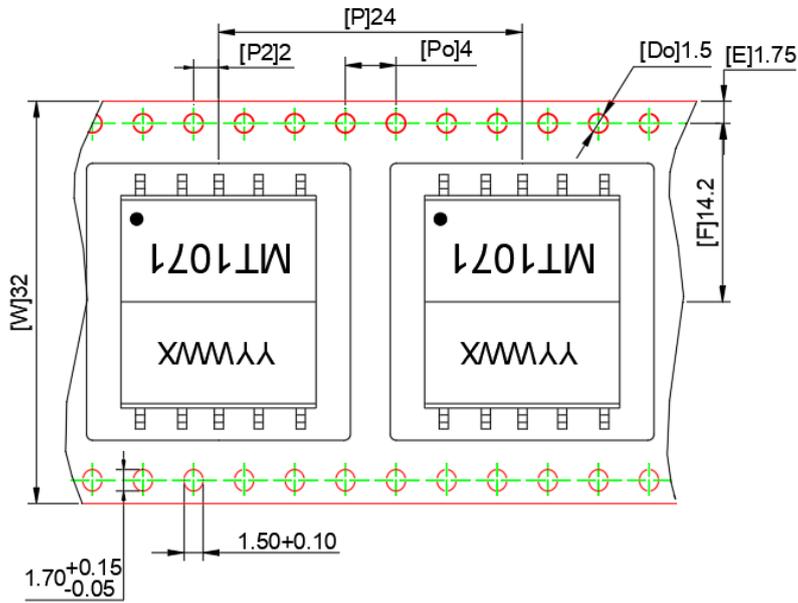

\*\*"D" INDICATES CARRIER TAPE WIDTH

每捲數量: 200PCS , 每箱數量: 600 PCS

