
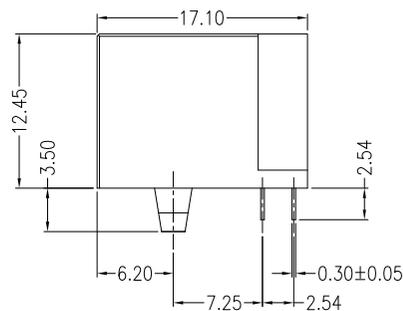


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2017/08/06	Phebe Su
A1			Change	2018/08/15	Phebe Su
A2			Change	2018/08/21	Phebe Su
A3			Change	2018/08/31	Phebe Su


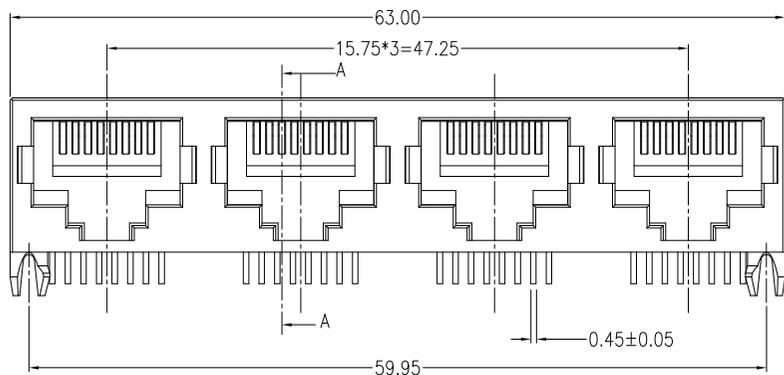


NOTES:

1.MATERIALS:

HOUSING: PBT, UL 94V-0, BLACK.
 CONTACTS: T=0.30 mm PHOSPHOR BRONZE,
 50u" NICKEL UNDERPLATE
 100u" MATTE TIN ON SOLDER TAIL
 GOLD 3u" ON CONTACT AREA.

2.OPERATING TEMPERATURE: -40°C ~ +85°C
3.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

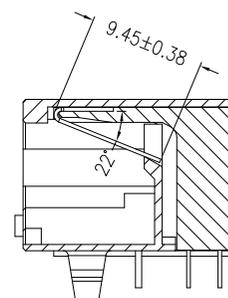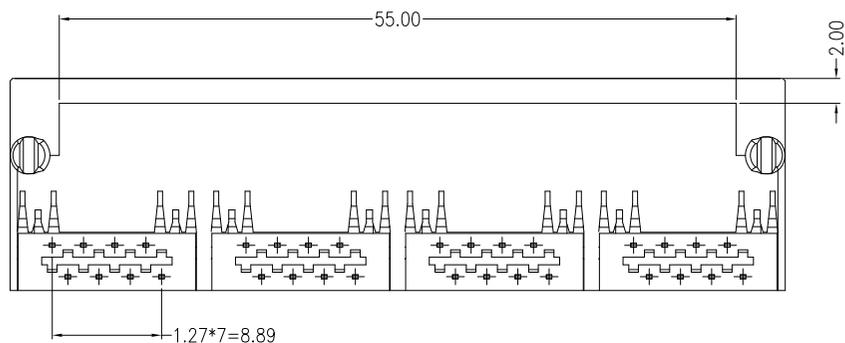

SECTION A-A

MATRIX PART NO :


Matrix-RJ45 - 1 4 T 895 R S

RS : ROHS
 HF : Halogen Free

Series Number

S : SMD
 T : THT

11:1X1 ; 21:2X1
 12:1X2 ; 22:2X2
 14:1X4 ; 24:2X4
 16:1X6 ; 26:2X6
 18:1X8 ; 28:2X8
 1U:RJ+USB

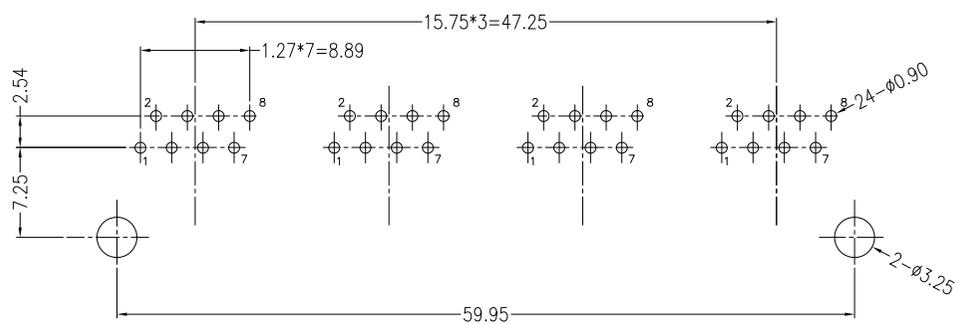

RECOMMENDED PCB LAYOUT
 COMPONENT SIDE
 TOLERANCE ±0.05

NO	VARIETY	QTY	MATERIAL	REMARK
	 Matrix Electronics Co.,Ltd			
TOLERANCE: X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3°		DESIGN BY : Phebe Su	DATE : 2018/08/31	PART NAME: RJ45 CONNECTOR 1X4 PORT W/O LED
 UNIT: mm [inch]		CHECKED BY: Vicky Hsieh	DATE : 2018/08/31	PART NO. MRJN-14T895RS
SCALE:1:1 SIZE:A4		APPROVED BY1: Richard Hsieh	DATE : 2018/08/31	MOLD NO. NA
		APPROVED BY2: Richard Hsieh	DATE : 2018/08/31	DRAW NO. SHEET NO. 1 OF 1