

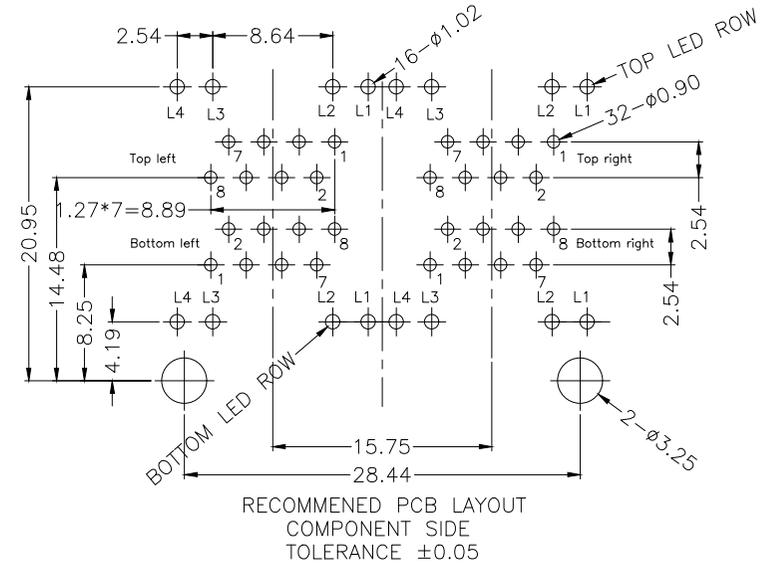
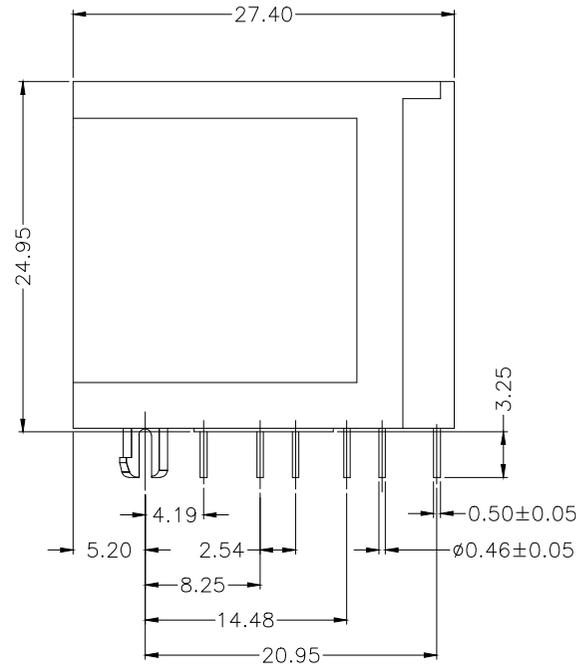
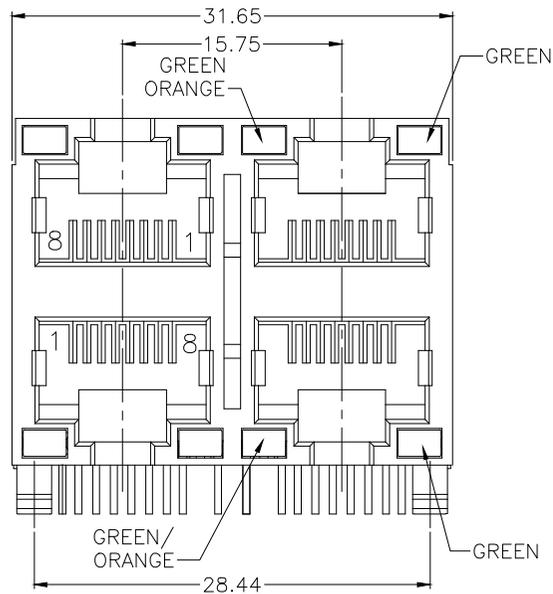


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2019/02/25	Phebe Su

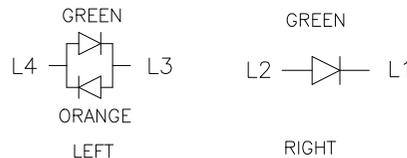

- NOTES:
- MATERIAL:
HOUSING:PBT,UL94V-0,BLACK
CONTACT:PHOSPHOR BORNZE,Ø0.46
GOLD FLASH ON CONTACT
 - OPERATING TEMPERATURE: -40°C ~ +85°C
 - LED SPEC
 - FORWARD VOLTAGE:1.8~2.4V
 - REVERSE CURRENT:10uA MAX
 - PEAK WAVE LENGTH:
GREEN:565~575nm ORANGE::600~610nm
 - ELECTRICAL:
 - VOLTAGE:125VAC
 - RATING:1.5A
 - CONTACT RESISTANCE:30mΩ MAX
 - INSULATION:500MΩ MIN.
 - DIELECTRIC:
AC 1KV 1mA ,60S BETWEEN ADJACENT CONTACTS

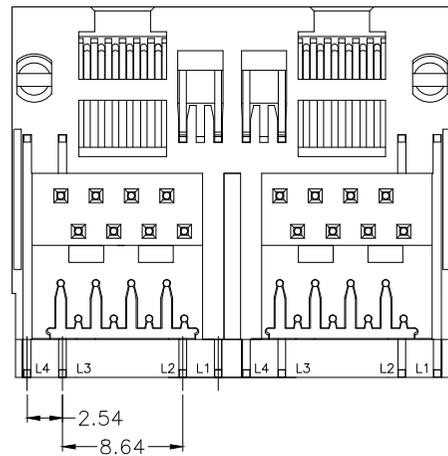

ORDER INFORMATION :

Matrix-RJ45 M R J N - 2 2 T 9 9 5 R S RS: ROHS
 HF: Halogen Free

F : 10/100
 G : 10/100/1000
 N : Pure Connector

Series Number

S: SMD
 T: THT

11:1X1 ; 21:2X1
 12:1X2 ; 22:2X2
 14:1X4 ; 24:2X4
 16:1X6 ; 26:2X6
 18:1X8 ; 28:2X8
 1U:RJ+USB

 Matrix Electronics Co.,Ltd			
TOLERANCE: X:X X:XX ±0.38 X:XXX ±0.25 X:XXX ±0.13 ANGLE: ±3°	DESIGN BY : Phebe Su	DATE : 2019/02/25	PART NAME: RJ45 CONNECTOR 2X2 PORT W/LED, 8P8C, W/O Shielded
	CHECKED BY: Yoyo Yeh	DATE : 2019/02/25	PART NO. MRJN-22T995RS
	APPROVED BY1: Richard Hsieh	DATE : 2019/02/25	MOLD NO. NA
UNIT: mm [inch]	APPROVED BY2: Richard Hsieh	DATE : 2019/02/25	DRAW NO.
SCALE:1:1 SIZE:A4			SHEET NO. 1 OF 1