

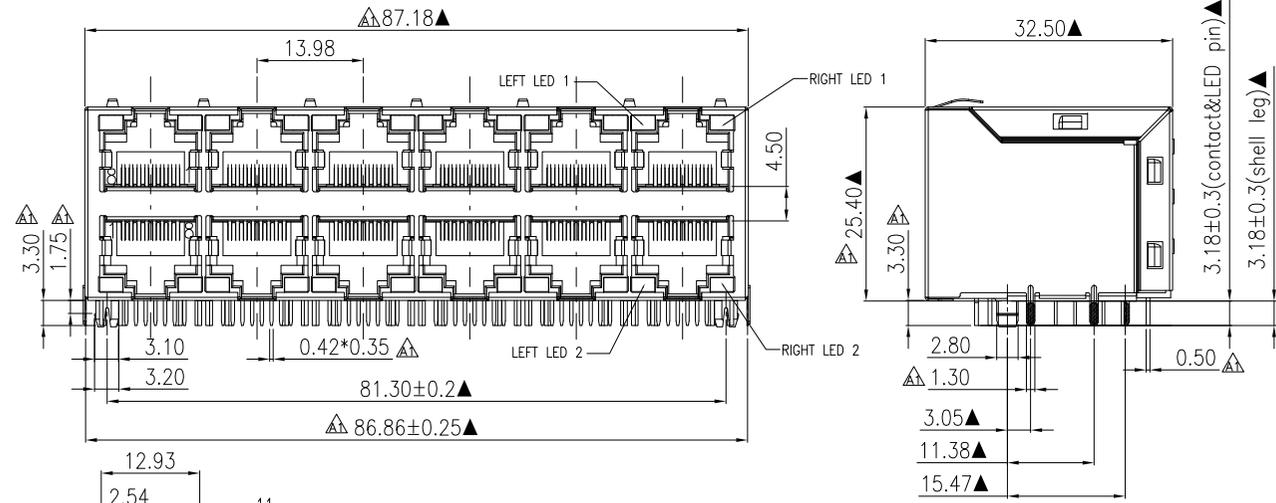


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A1			Change dimensions	2022/11/23	Vince
A1.1			Modify Shell	2023/02/13	Vince

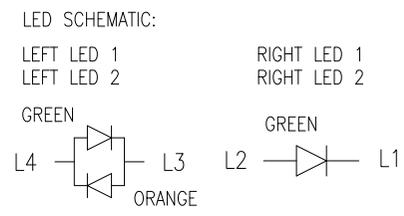

- NOTES:
- MATERIAL:
HOUSING: PA46, UL94V-0, BLACK
CONTACT: PHOSPHOR BORNZE, T=0.35
SHELL: SUS
 - FINISH:
CONTACT: GOLD 6u" ON CONTACT AREA
TIN PLATING ON SOLDER TAIL
SHELL: NICKEL PLATING OVERALL
 - OPERATING TEMPERATURE: -40°C ~ +85°C.
 - JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
 - The mark ▲ is the focus size.

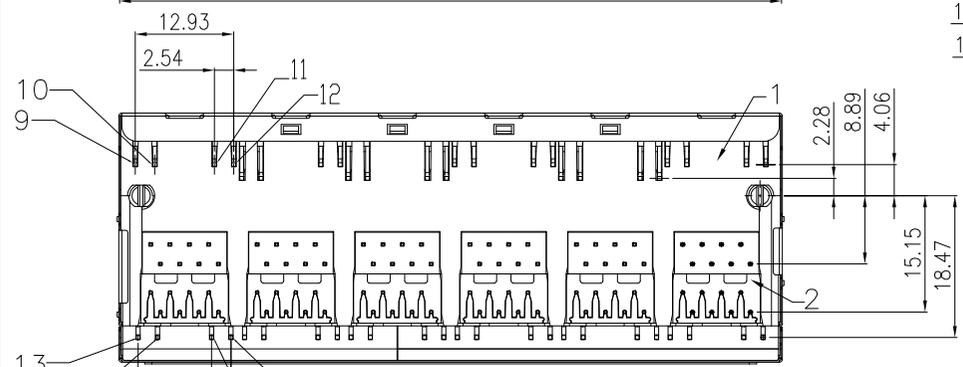

ORDER INFORMATION :

MRJ N -26 T891 RS


Matrix-RJ45
F : 10/100
G : 10/100/1000
N : Pure Connector

RS : ROHS
HF : Halogen Free

Series Number

S : SMD
T : THT

11:1X1 ; 21:2X1
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1U:RJ+USB

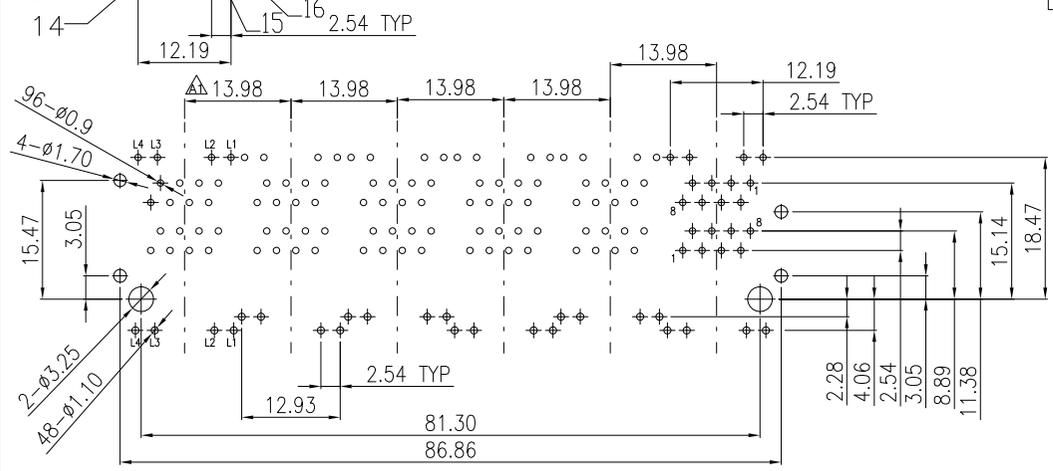

RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ±0.05

NO	VARIETY	QTY	MATERIAL	REMARK
<p>TOLERANCE: X.X ±0.38 X.XX ±0.25 X.XXX ±0.15 ANGLE: ±3°</p>				
DESIGN BY :		DATE :		PART NAME:
Vince Chen		2023/02/13		RJ45 2X6 W/SHELL W/LED
CHECKED BY:		DATE :		PART NO.
Hanson Huang		2023/02/13		MRJN-26T891RS
APPROVED BY1:		DATE :		MOLD NO.
Richard Hsieh		2023/02/13		NA
APPROVED BY2:		DATE :		DRAW NO.
Richard Hsieh		2023/02/13		NA
SCALE:1:1		SIZE:A4		SHEET NO.
				1 OF 1