
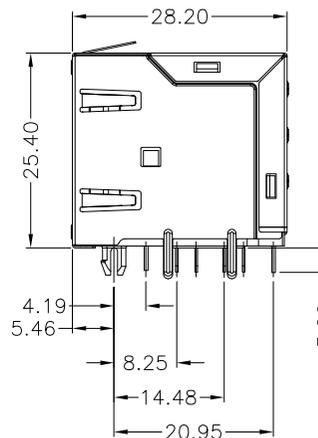


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2019/09/05	Phebe Su
A1			新增備註	2021/01/06	Hanson

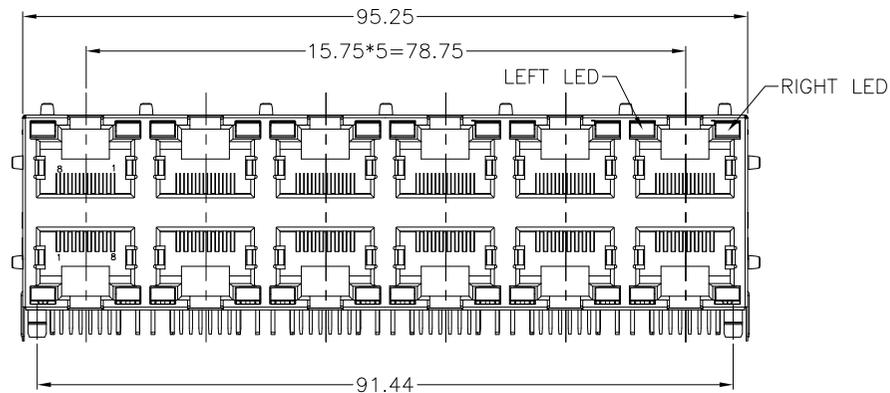

NOTES:

1. MATERIAL:

HOUSING: PA46, UL94V-0, BLACK

CONTACT: PHOSPHOR BORNZE, T=0.35

SHELL: COPPER ALLOY

2. FINISH:

CONTACT: GOLD 3u" ON CONTACT AREA





MATTE TIN PLATING ON SOLDER TAIL

SHELL: NICKEL PLATING OVERALL

4. OPERATING TEMPERATURE: -40°C ~ +85°C.

5. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

ORDER INFORMATION :

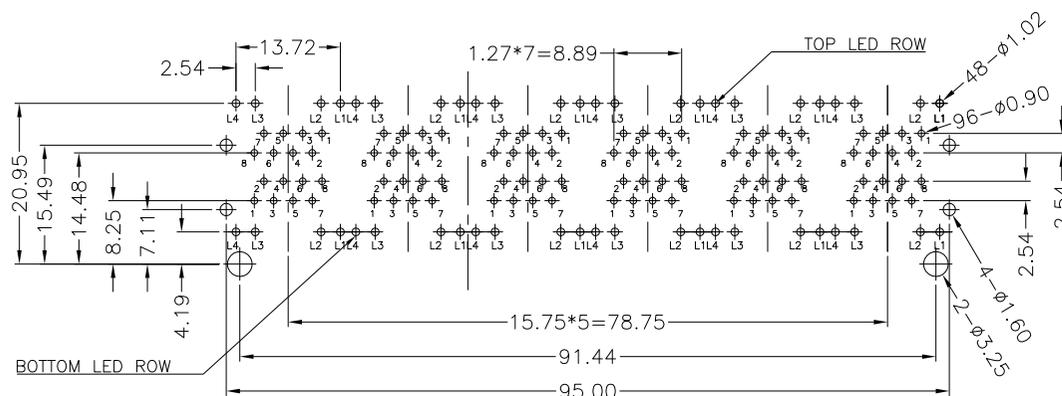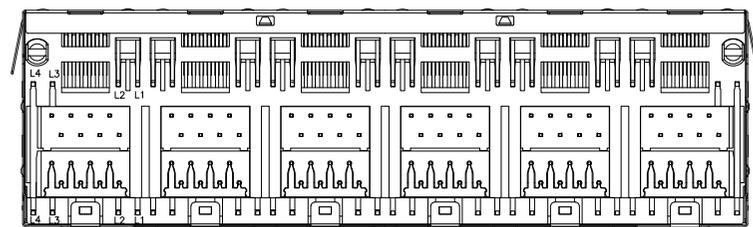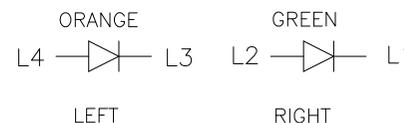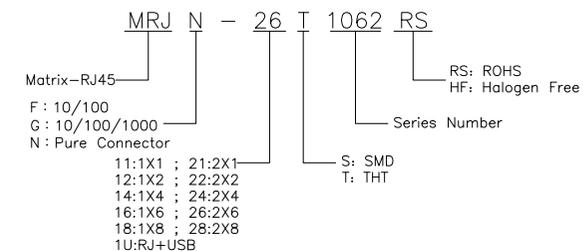

RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ±0.05

△ 備註	
1	LED燈罩高度低於≤0.5mm
2	LED燈罩不可下陷(低於外殼)



Matrix Electronics Co., Ltd

TOLERANCE: X.X ±0.38 X.XX ±0.25 X.XXX ±0.15 ANGLE: ±3°	DESIGN BY : Hanson Huang	DATE : 2021/01/06	PART NAME: RJ45 CONNECTOR 2X6 PORT W/LED, 8PBC, Shielded, Thru-Hole
UNIT: mm [inch]	CHECKED BY: Vicky Hsieh	DATE : 2021/01/06	PART NO. MRJN-26T1062RS
SCALE: 1:1 SIZE: A4	APPROVED BY1: Richard Hsieh	DATE : 2021/01/06	MOLD NO. NA
	APPROVED BY2: Richard Hsieh	DATE : 2021/01/06	DRAW NO. NA
			SHEET NO. 1 OF 1