
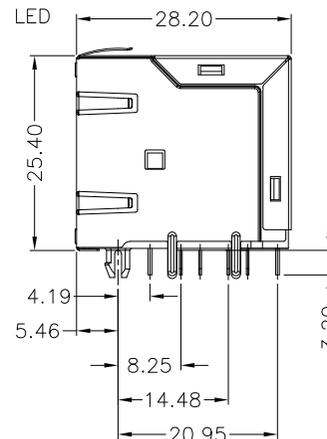


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2019/06/25	Phebe Su
A1			新增備註	2021/01/06	Hanson

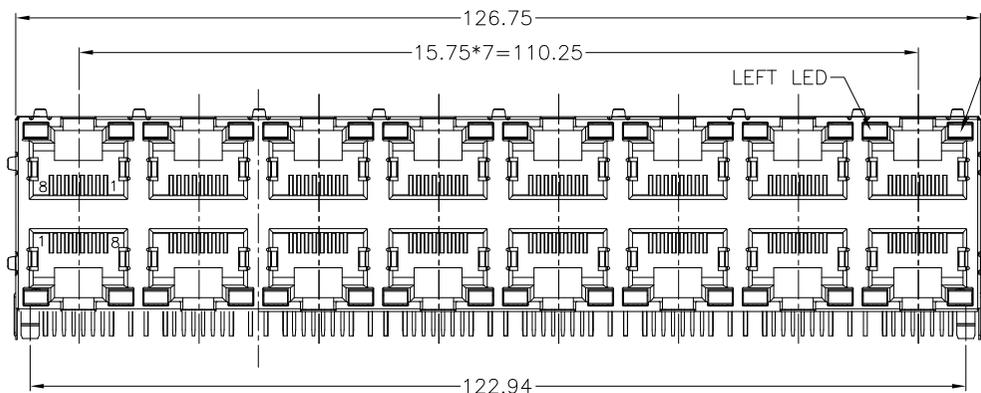

NOTES:

1.MATERIAL:

HOUSING:PA46,UL94V-0,BLACK

CONTACT:PHOSPHOR BORNZE,T=0.35

SHELL:COPPER ALLOY

2.FINISH:



CONTACT:GOLD 3u" ON CONTACT AREA

MATTE TIN PLATING ON SOLDER TAIL



SHELL:NICKEL PLATING OVERALL

4.OPERATING TEMPERATURE:-40°C~+85°C.

5.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

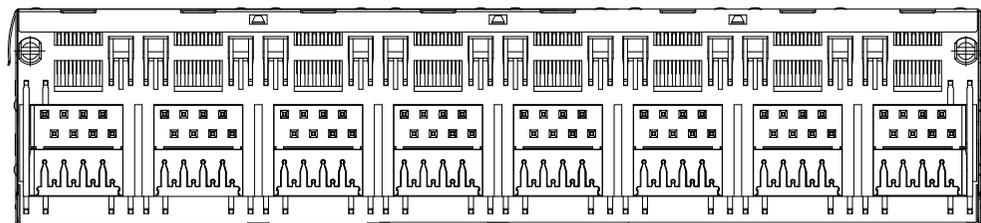

ORDER INFORMATION :

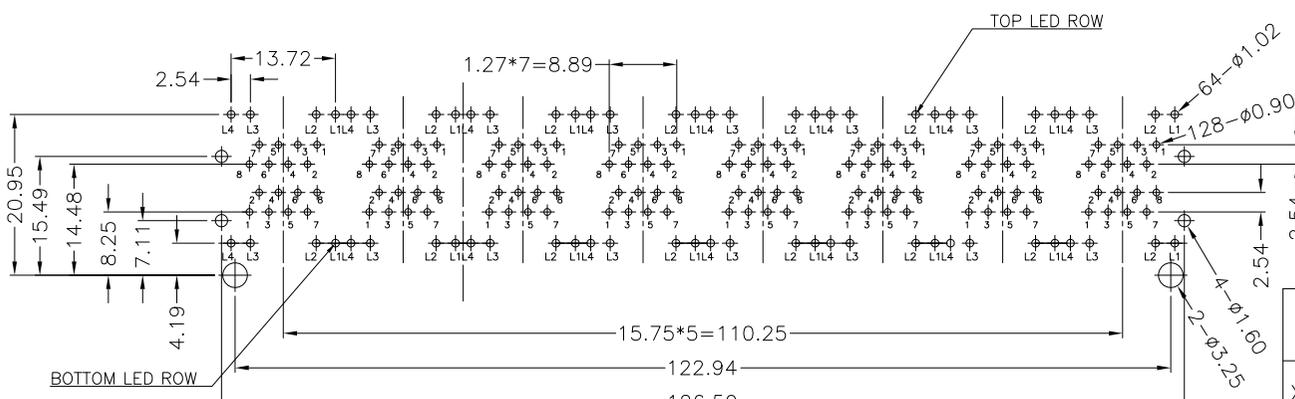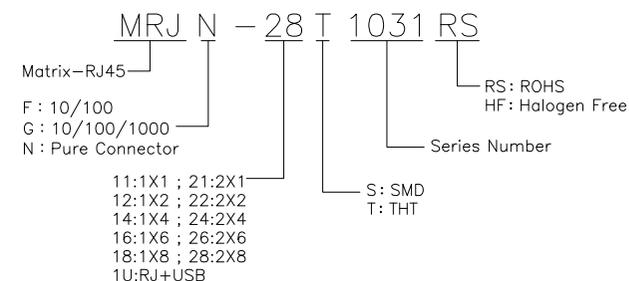

RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ±0.05

△ 備註	
1	LED燈罩高度低於≤0.5mm
2	LED燈罩不可下陷(低於外殼)



Matrix Electronics Co.,Ltd

TOLERANCE: X.X ±0.3mm X.XX ±0.25mm X.XXX ±0.15mm ANGLE: ±3°	DESIGN BY : Hanson Huang	DATE : 2021/01/06	PART NAME: RJ45 CONNECTOR 2X8 PORT W/LED, 6P8C, Shielded, Thru-Hole
UNIT: mm [inch]	CHECKED BY: Vicky Hsieh	DATE : 2021/01/06	PART NO. MRJN-28T1031RS
SCALE:1:1 SIZE:A4	APPROVED BY1: Richard Hsieh	DATE : 2021/01/06	MOLD NO. NA
	APPROVED BY2: Richard Hsieh	DATE : 2021/01/06	DRAW NO. NA
			SHEET NO. 1 OF 1