
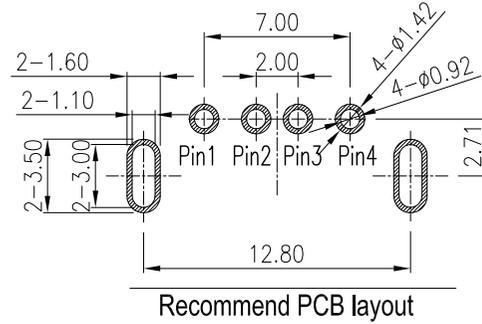






GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2022/10/04	Ken Lin

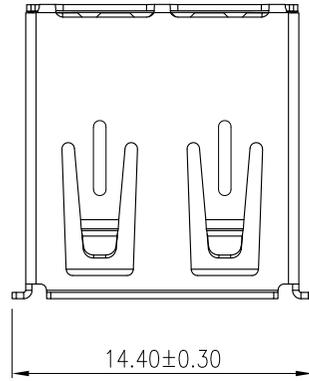

Specification

Electrical Characteristics:
 Contact Current Rating:1 Amperes.
 Dielectric Withstanding Voltage:AC 500V R.M.S.
 Insulation Resistance:500MΩ Min.
 Contact Resistance:30mΩ Max.
 Mechanical Characteristics:
 Mating Force:3.57kg Max.
 Unmating Force:0.70kg Min.
 Material:
 Housing:LCP UL94V-0 Color:Black
 Contact:BRASS C2680, Gold Flash Plating
 Shell:SPCC.Plating Ni over all
 OPERATION TEMPERATURE : -40°C~+85°C
 MATERIAL COMPLIES: HALOGEN FREE & RoHS

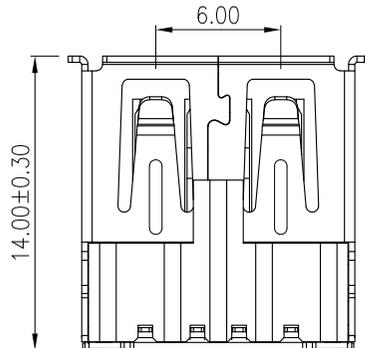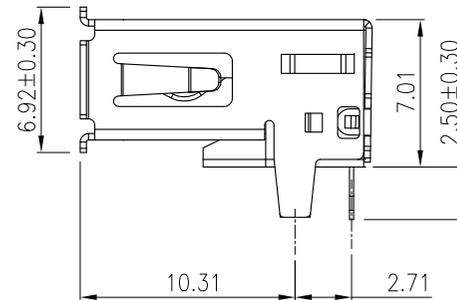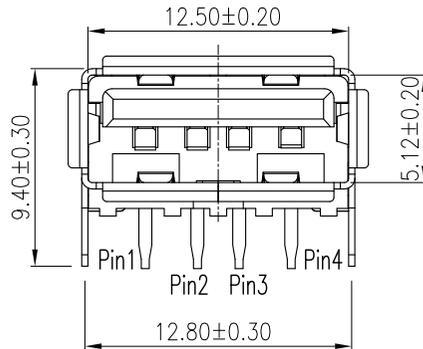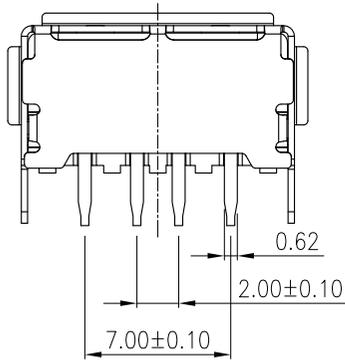

MATRIX PART NO:
 MATRIX USB MUSB 04 - 01 - 633 Series number
 Pin Number 01 Plating
 01: Gold Flash
 15: 15u"
 30: 30u"

 Matrix Electronics Co., Ltd				
TOLERANCE: X.X ±0.50 X.XX ±0.30 X.XXX ±0.20 X.XXX ±0.15 ANGLE: ±3°	DESIGN BY :	DATE :	PART NAME:	
	Ken Lin	2022/10/04	USB2.0 A Type DIP Female	
UNIT: mm [inch] SCALE:1:1 SIZE:A4	CHECKED BY:	DATE :	PART NO.	MUSB04-01-633
	Vicky Hsieh	2022/10/04		
APPROVED BY1: APPROVED BY2:	DATE :	MOLD NO.	NA	
	Richard Hsieh	2022/10/04		
		DATE :	DRAW NO.	
		Richard Hsieh	2022/10/04	SHEET NO. 1 OF 1