

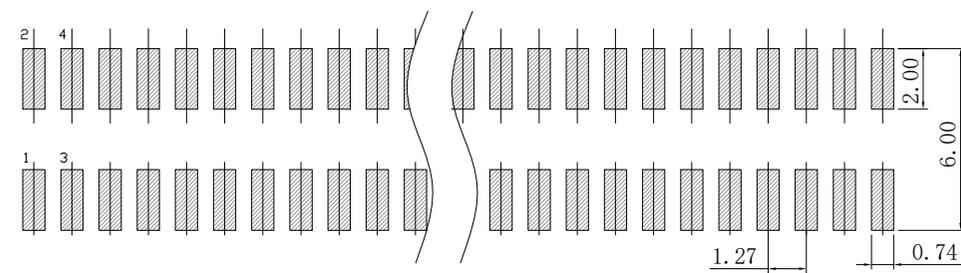
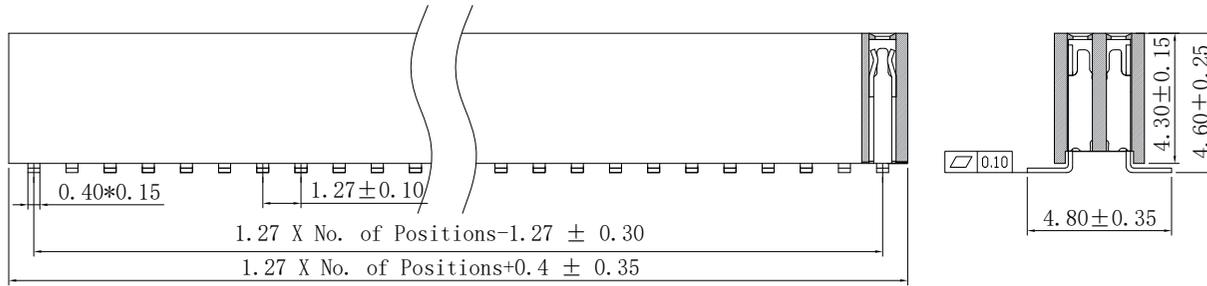


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2023/07/22	Hanson
A1			Change DIM.	2024/08/21	Hanson

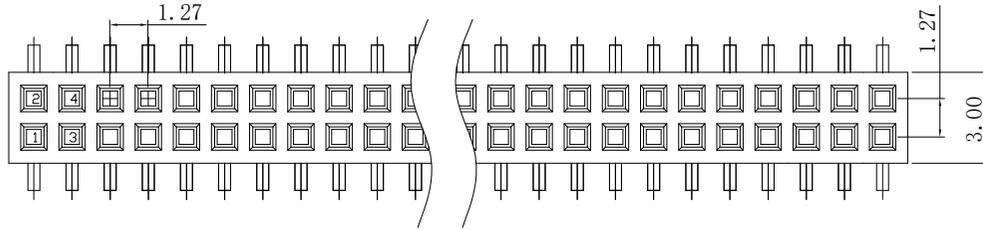

Recommended P.C.B LAYOUT
General Tolerance ±0.05 TOP View

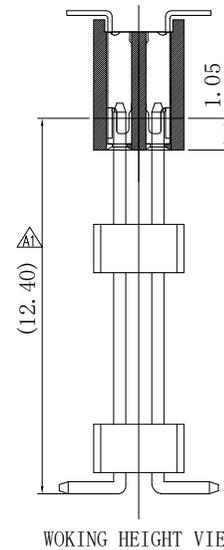


WORKING HEIGHT VIEW

Remark

Housing: PA9T (HF) UL94V-0, Color: Black
 Contact: Phosphor, Au 0.6 μ" PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL
 Raring Current: DC30V 1.0 AMP or DC15V 2.0 AMP.
 Contact Resistance: 20 mΩ MAX.
 Insulating Resistance: 1000 MΩ MIN.
 Withstanding Voltage: AC 500V/Minute.
 Temperature Range: -40° C to +105° C

MATRIX PART NO:

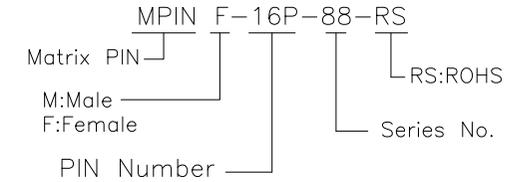

Matrix Electronics Co., Ltd			
TOLERANCE: X:X ±0.38 X:XX ±0.25 X:XXX ±0.15 ANGLE: ±5°	DESIGN BY : Hanson Huang	DATE : 2024/08/21	PART NAME: Pitch 1.27mm Double Row Series SMT Female Header
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	CHECKED BY: Vicky Hsieh	DATE : 2024/08/21	PART NO. MPINF-16P-88-RS
	APPROVED BY1: Richard Hsieh	DATE : 2024/08/21	MOLD NO. NA
	APPROVED BY2: Richard Hsieh	DATE : 2024/08/21	DRAW NO.
			SHEET NO. 1 OF 1