
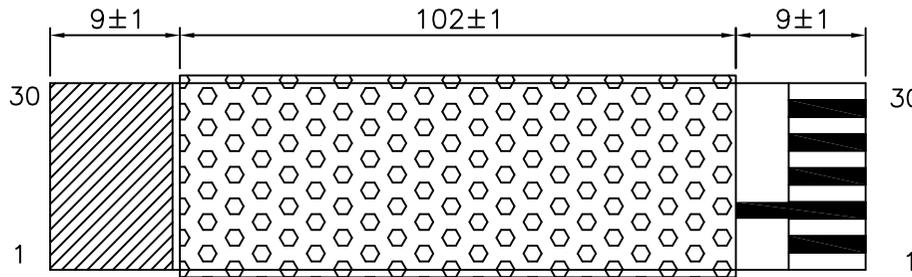
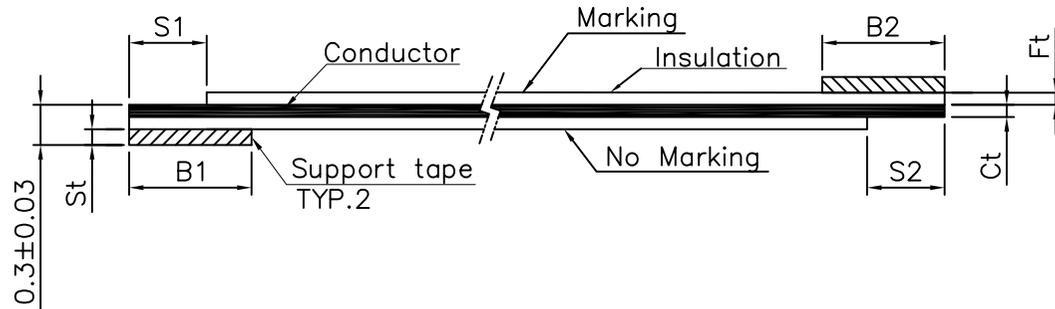



# GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2022/03/24	Ken Lin

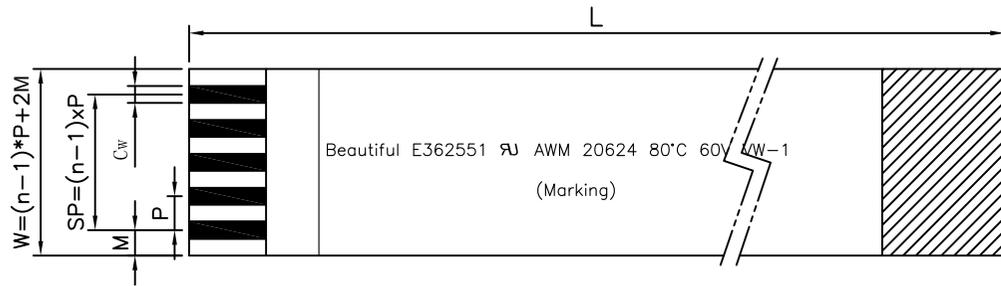

Material Specification			
ITEM	SPEC	Dimension	备注
绝缘膜	Ft	0.043	E362551 20624 80°C 60V
导体	Ct*Cw	0.035*0.3	镀锡线
补强板	St	0.225	BLUE

Note:

- 公差以尺寸下面的公差为标准
- OQC严格按照图示尺寸检验
- UL Style : E362551 20624 80° C 60V

- 從1往30數第3P接地
- 線身環包W33\*L102內導鋁箔，接縫於無字面。

### FFC Specification

P	TYPE	No. of Con.	L	S1	S2	B1	B2	SP	W	M	Support Tape Color
0.5	B	30	120	4	4	8	8	14.5	15.5	0.5	Blue
			±2	±0.5	±0.5	±1	±1	±0.08	±0.08	±0.08	



Matrix Electronics Co.,Ltd

<b>TOLERANCE:</b> X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±1°	DESIGN BY : Ken Lin	DATE : 2022/03/24	PART NAME: FLEXIBLE FLAT CABLE Pitch=0.5mm L=120mm 30Pin	
	CHECKED BY: Anson Cheng	DATE : 2022/03/24	PART NO.	MRSFCP05N30T-M326
UNIT: mm [inch] SCALE:1:1 SIZE:A4	APPROVED BY1: Richard Hsieh	DATE : 2022/03/24	MOLD NO.	NA
	APPROVED BY2: Richard Hsieh	DATE : 2021/02/24	DRAW NO.	
			SHEET NO.	1 OF 1