
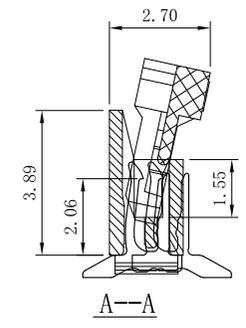
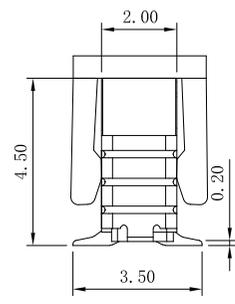
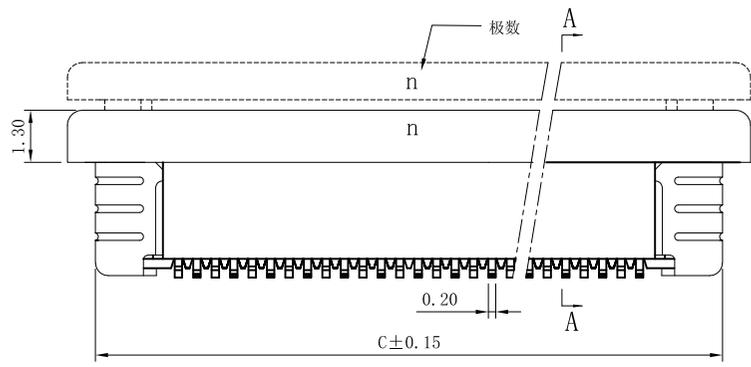




GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			initial	2021/04/19	Ken Lin

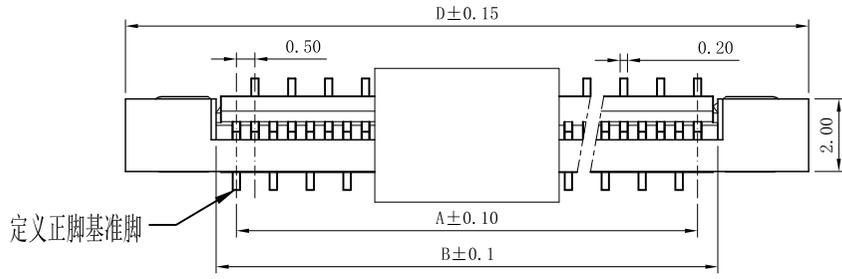


性能:
 额定电流: 0.4A
 额定电压: 50V
 耐电压: 200V
 接触电阻: ≤ 20mΩ
 绝缘电阻: 500MΩ
 工作温度: -20℃~+85℃
 塑件(材质): LCP, UL94V-0
 锁扣(材质): LCP, UL94V-0
 插簧(材质): 磷青铜, 镀锡/镀金
 焊片(材质): 磷青铜, 镀锡/镀金

PIN NO	A	B	C	D
45	22.00	23.10	26.85	28.15

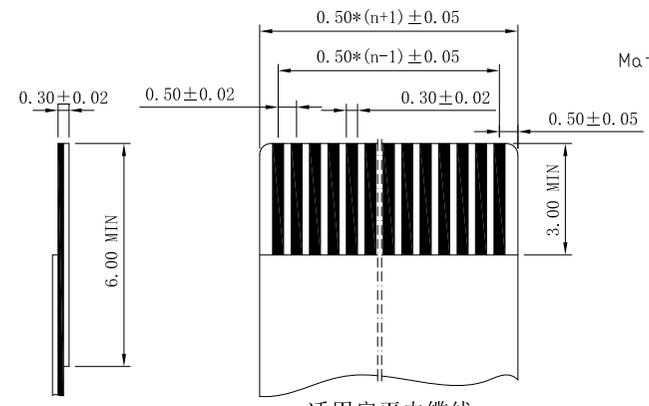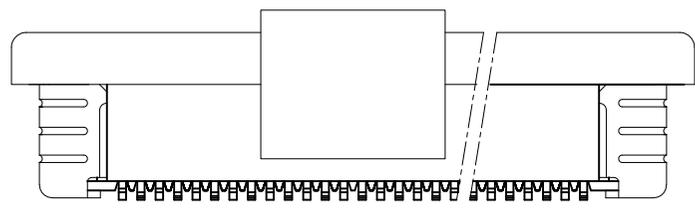

MATRIX PART NO:
 Matrix FPC: MFC - 05 - 45 P 106 RS
 pitch: 25:2.54mm, 12:1.25mm, 10:1.0mm, 05:0.5mm, 03:0.3mm
 Pin number: 45
 RS:RoHs, HF:Hologen Free, Series number
 T:雙觸式, C:掀蓋式, P:壓桿式, B:後掀式

适用扁平电缆线

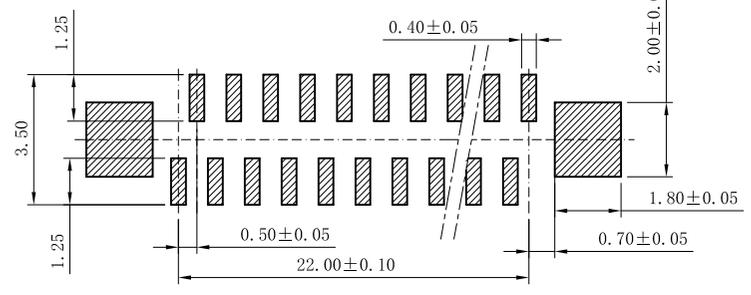

PCB Layout



Matrix Electronics Co., Ltd

TOLERANCE: X:X ±0.15 X:XX ±0.10 X:XXX ±0.05 ANGLE: ±1°	DESIGN BY : Ken Lin	DATE : 2021/04/19	PART NAME: 0.5Pitch H=4.5 FPC ZIF SMT CONN 左接	
UNIT: mm [inch]	CHECKED BY: Sam Kuo	DATE : 2021/04/19	PART NO.	MFC-05-45P106RS
SCALE:1:1 SIZE:A4	APPROVED BY1: Richard Hsieh	DATE : 2021/04/19	MOLD NO.	NA
	APPROVED BY2: Richard Hsieh	DATE : 2021/04/19	DRAW NO.	
			SHEET NO.	1 OF 1