


GP Component




REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2016/09/05	Pebe Su

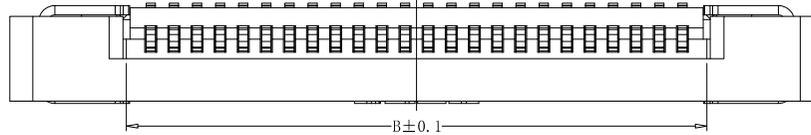

性能:

额定电流: 0.5A
 额定电压: 50V
 耐压: 200V
 接触电阻: $\leq 20m\Omega$
 绝缘电阻: $\geq 500M\Omega$
 工作温度: $-25^{\circ}C \sim +85^{\circ}C$



塑件 (材质): LCP, UL94V-0
 锁扣 (材质): LCP, UL94V-0
 插簧 (材质): 磷青铜, 镀锡
 焊片 (材质): 磷青铜, 镀锡

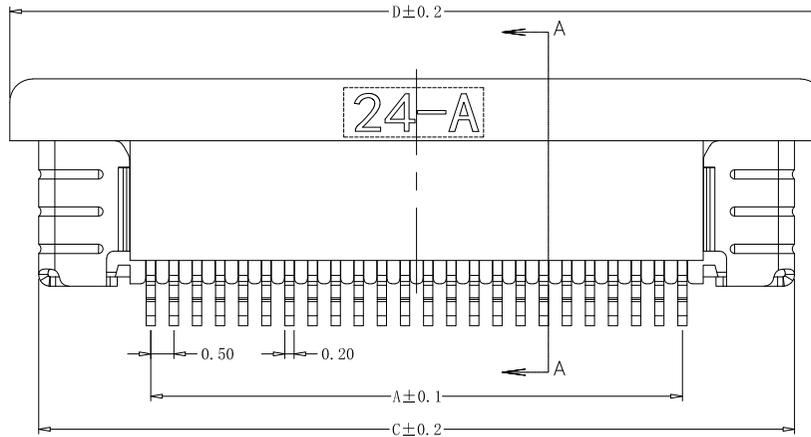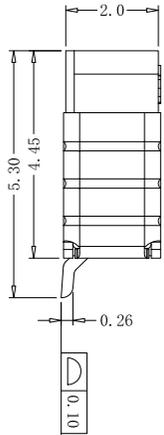

SECTION A-A

CKT.	A	B	C	D
30	14.50	15.60	19.35	20.65

MATRIX PART NO:

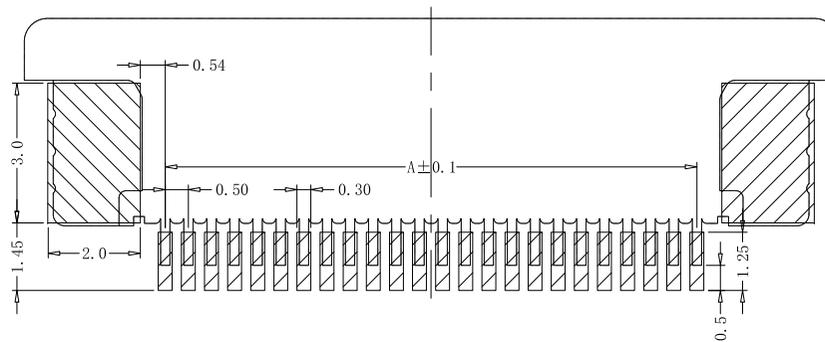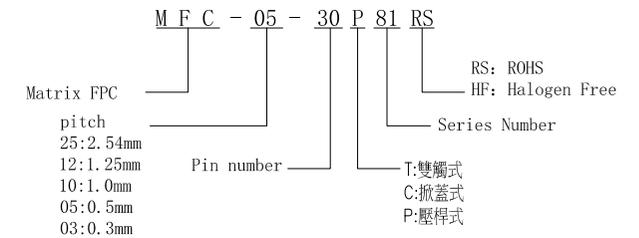

PC BOARD LAYOUT

 Matrix Electronics Co., Ltd			
TOLERANCE: X:X ±0.10 X:XX ±0.05 X:XXX ±0.03 X±2°	DESIGN BY : Phebe Su	DATE : 2016/09/05	PART NAME: P=0.5mm H=2.0mm FPC CONNECTOR 下接觸
	CHECKED BY: Vicky Hsieh	DATE : 2016/09/05	PART NO. MFC-05-30P81RS
	APPROVED BY1: Richard Hsieh	DATE : 2016/09/05	MOLD NO. N / A
	APPROVED BY2: Richard Hsieh	DATE : 2016/09/05	DRAW NO.
SCALE:1:1	SIZE:A4		SHEET NO. 1 OF 1