
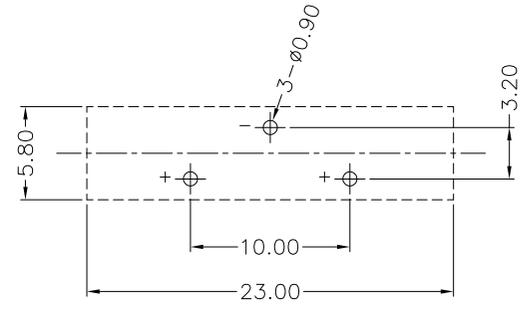
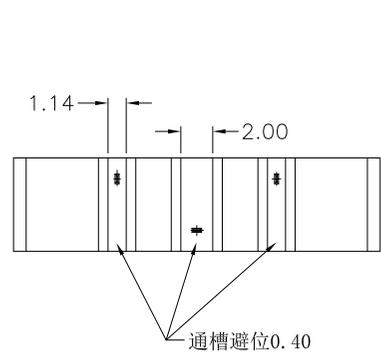
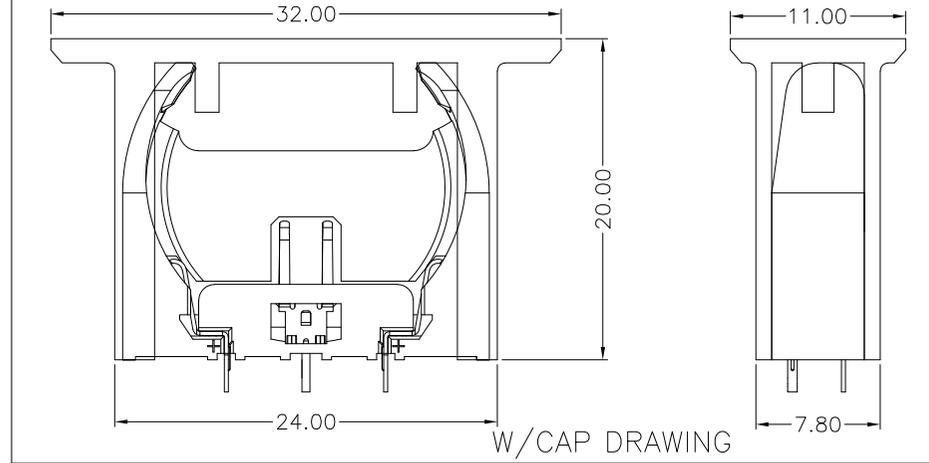
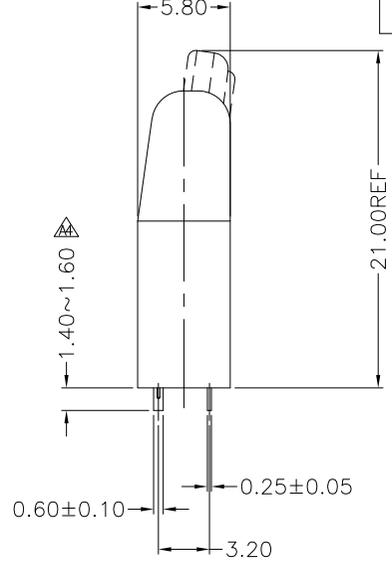


GP Component


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2018/05/16	Phebe Su
A1			Change	2018/06/01	Phebe Su
A2			Change	2018/07/23	Phebe Su
A3			Change pin length to 2.00mm	2018/08/28	Phebe Su
A4			Change pin length to 1.40~1.60mm	2024/10/15	Hanson

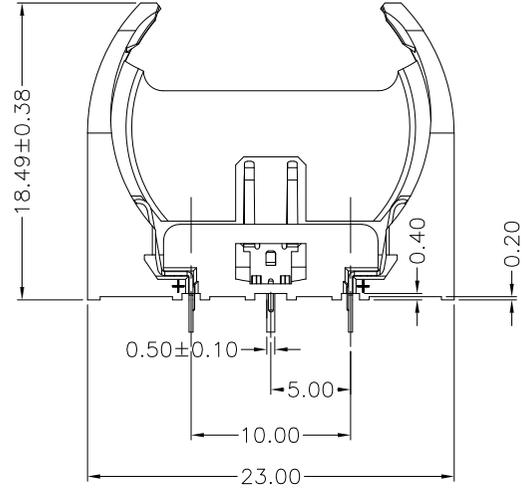

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05

NOTES:

- MATERIAL:
 - HOUSING: NY9T UL94V-0 BLACK
 - CONTACTS: SUS304 T=0.25
- FINISH:
 - CONTACT: GOLD 1u" ON CONTACT AREA
 - MATTE TIN 100u" Min ON SOLDER TAIL ,
 - NICKEL 30u" Min UNDERPLATING
- BATTERY: CR2032

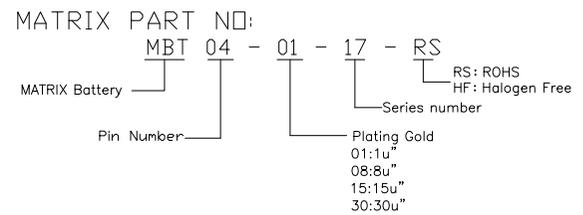

Matrix Electronics Co.,Ltd

TOLERANCE: X.X ±0.38 X.XX ±0.25 X.XXX ±0.13 ANGLE: ±3	DESIGN BY : Hanson	DATE : 2024/10/15	PART NAME: BATTERY FEMALE DIP TYPE PIP (CR2032)	
	CHECKED BY: Vicky Hsieh	DATE : 2024/10/15	PART NO.	MBT04-01-17-RS
	APPROVED BY1: Richard Hsieh	DATE : 2024/10/15	MOLD NO.	NA
	APPROVED BY2: Richard Hsieh	DATE : 2024/10/15	DRAW NO.	
SCALE:1:1 SIZE:A4			SHEET NO.	1 OF 1