

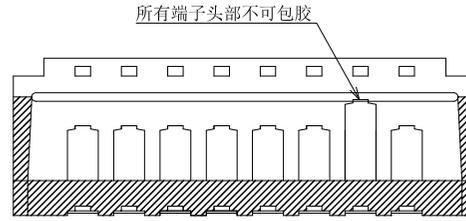


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2015/12/28	Phebe Su
A1			Change	2022/04/23	Hanson
A2			Change DIM.	2022/05/12	Hanson

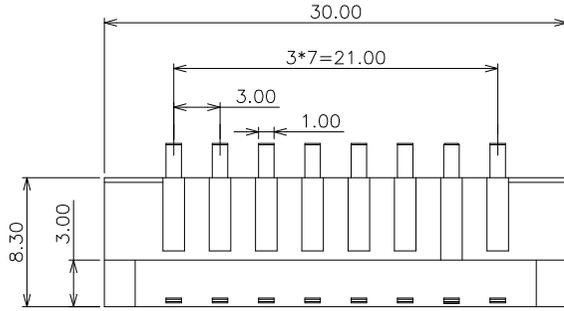


SECTION C-C

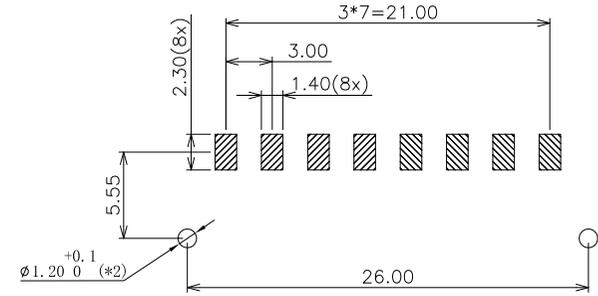



PCB LAYOUT

NOTES.

- ELECTRICAL
 - CURRENT RATING: 3.0A PER PIN MAX.
 - CONTACT RESISTANCE: 35m OHM MIN.
 - INSULATION RESISTANCE: 1000M OHM MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 20VAC.
- MATERIALS
 - HOUSING: HIGH TEMPERATURE POLYESTER, UL 94V-0. BLACK
 - TERMINAL: COPPER ALLOY.
- UNLESS OTHERWISE SPECIFIED TOLERANCE: AS SHOWN AS GENERAL TOLERANCE
- LIFE TEST: 150000 CYCLES.
- OPERATION TEMPERATURE: -40°C ~ +85°C
- PRODUCT COMPLIANT TO ROHS AND HALOGEN FREE.

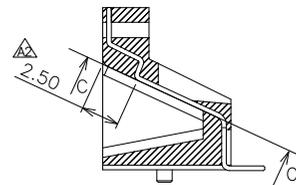


SECTION A-A

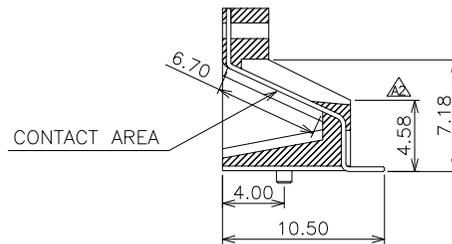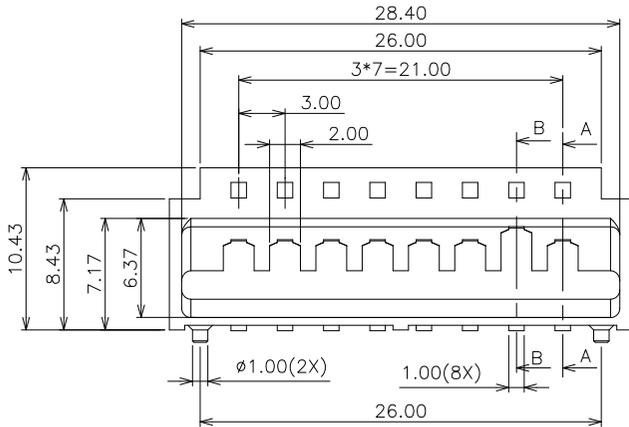

SECTION B-B

MATRIX PART NO:

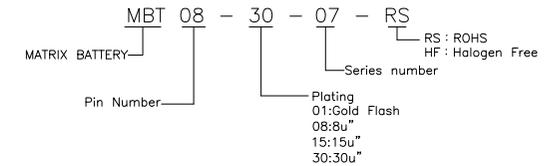

Matrix Electronics Co., Ltd

TOLERANCE: X: ±0.50 X.X: ±0.30 X.XX: ±0.20 X.XXX: ±0.10 ANGLE: ±3°	DESIGN BY : Hanson Huang	DATE : 2022/05/12	PART NAME: BATTERY R/A SMT TYPE	
	CHECKED BY: Vicky Hsieh	DATE : 2022/05/12	PART NO.	MBT08-30-07-RS
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY1: Richard Hsieh	DATE : 2022/05/12	MOLD NO.	NA
	APPROVED BY2: Richard Hsieh	DATE : 2022/05/12	DRAW NO.	SHEET NO.
				1 OF 1