
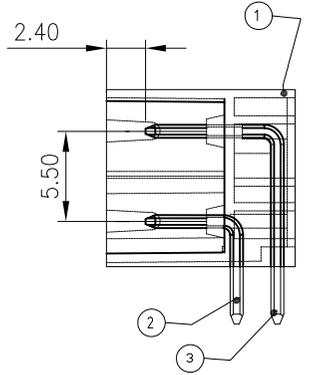
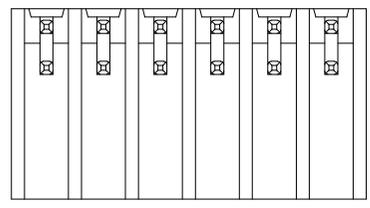
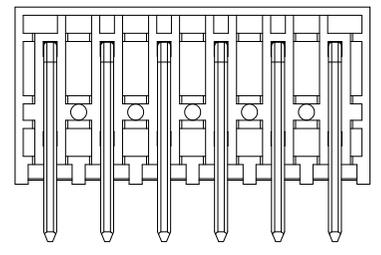


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2022/04/11	Hanson


- Technical Data:**
- Nominal Voltage:150V
 - Current Rating:8A
 - Pitch :3.50mm
 - Insulation Withstanding Voltage: AC 1300V Min
 - Insulation Resistance:1000MΩ Or More at DC 500V
 - Using Temperature Range:-40°C TO +115°C
 - Soldering Temperature:260±5°C 10S
 - Safety Approval: 
 - Undimentioned Tolerances:

Dim L =(P-1)X3.5+4.3		
Dim B =(P-1)X3.5		
P= $\frac{1}{2}$ Number Of Poles (04-48P)		
	Dim B	Dim L
0 - 30 mm	±0.15	±0.15
Over 30 - 60 mm	±0.20	±0.20
Over 60 - 90 mm	±0.25	±0.25
Over 90 mm	±0.30	±0.30

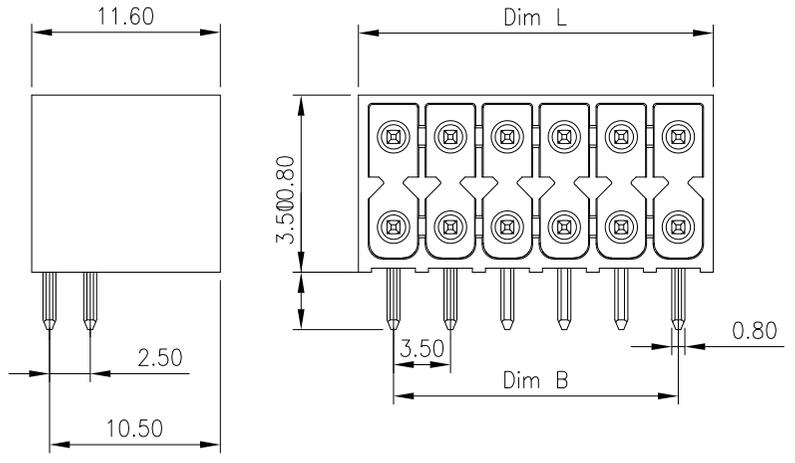

MATRIX PART NO:

SHGBH350 12 5 H
 Pin:04~48
 0 Black R RoHS
 5 Green H HF

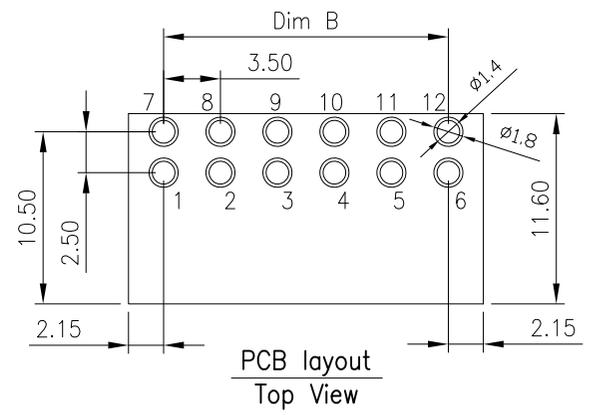

3	PIN	COPPER	TIN PLATED	P
2	PIN	COPPER	TIN PLATED	P
1	BODY	PA66 UL94V-0	Color : Green	1
NO.	Name	Material	Notes	Q'TY



Matrix Electronics Co.,Ltd

TOLERANCE: X:X ±0.50 X:XX ±0.30 X:XXX ±0.20 X:XXX ±0.15 ANGLE: ±5°		DESIGN BY : Hanson Huang	DATE : 2022/04/11	PART NAME: Double Pitch3.50mm Right angle Terminal Block Scket DIP Series (HALOGEN FREE)	
UNIT: mm [inch] SCALE:1:1 SIZE:A4		CHECKED BY: Vicky Hsieh	DATE : 2022/04/11	PART NO. MSHGBH350125H	
		APPROVED BY1: Richard Hsieh	DATE : 2022/04/11	MOLD NO. NA	
		APPROVED BY2: Richard Hsieh	DATE : 2022/04/11	DRAW NO.	
				SHEET NO.	1 OF 1