


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2024/03/05	WuZonLin

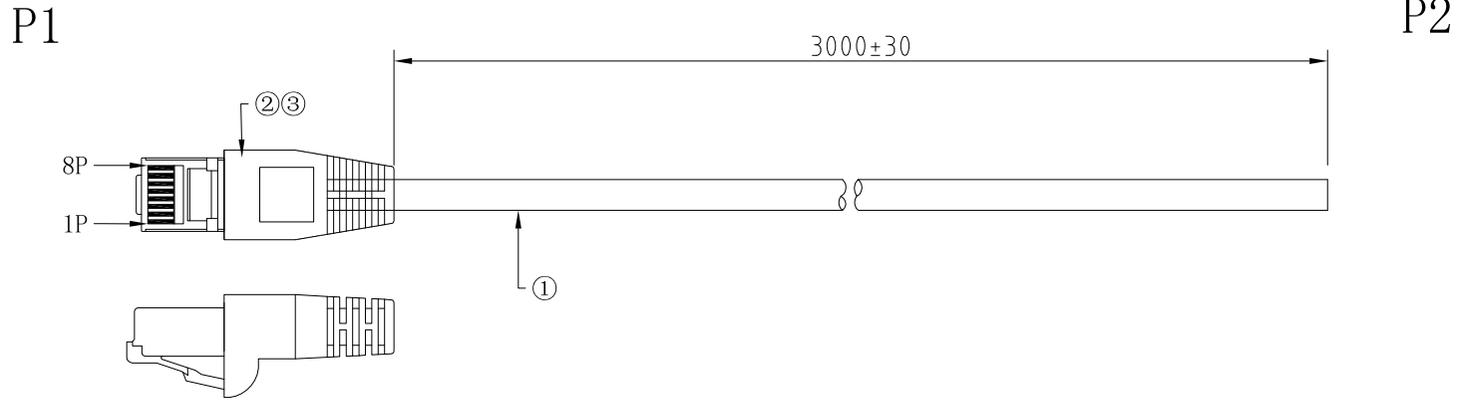

	P1	P2
1	WHITE/BLUE	OPEN
2	BLUE	OPEN
3	WHITE/ORANGE	OPEN
4	ORANGE	OPEN
5	WHITE/GREEN	OPEN
6	GREEN	OPEN
7	WHITE/BROWN	OPEN
8	BROWN	OPEN

NOTE:  
 1. 100% OPEN&SHORT AND MISS WIRE:  
 CONTACT RESISTANCE:2.0 OHM MAX;  
 INSULATION RESISTANCE:10M OHM MIN;  
 HI-POT:DC300V/0.01S.  
 2. ALL MATERIALS MUST BE RoHS COMPLIANT.



**Matrix Electronics Co.,Ltd**

<b>TOLERANCE:</b> X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 ANGLE: ±2°		<b>DESIGN BY :</b> Wu Zon Lin	<b>DATE :</b> 2024/03/05	<b>PART NAME:</b> WIRE 8PIN/8PIN L=3000mm	
		<b>CHECKED BY:</b> Yoyo Yeh	<b>DATE :</b> 2024/03/05	<b>PART NO.</b>	MCABLE-UTP-019-RS
<b>UNIT: mm [inch]</b>		<b>APPROVED BY1:</b> Richard Hsieh	<b>DATE :</b> 2024/03/05	<b>MOLD NO.</b> NA	
<b>SCALE:1:1 SIZE:A4</b>		<b>APPROVED BY2:</b> Richard Hsieh	<b>DATE :</b> 2024/03/05	<b>DRAW NO.</b>	NA
				<b>SHEET NO.</b>	1 OF 1

No. 序号	ITEM 名称	DESCRIPTION 规格描述	QTY 数量	UNITS 单位
3	BOOT	BLACK 60P PVC	AR	g
2	CONN	RJ45 8P8C 3U	1	PC
1	CABLE	CAT. 5e 24#(0.5BCCA(單芯線))*4P+棉線 OD:4.8mm 灰色PVC外被	3020	MM