


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2024/06/18	WuZonLin

P1

P2

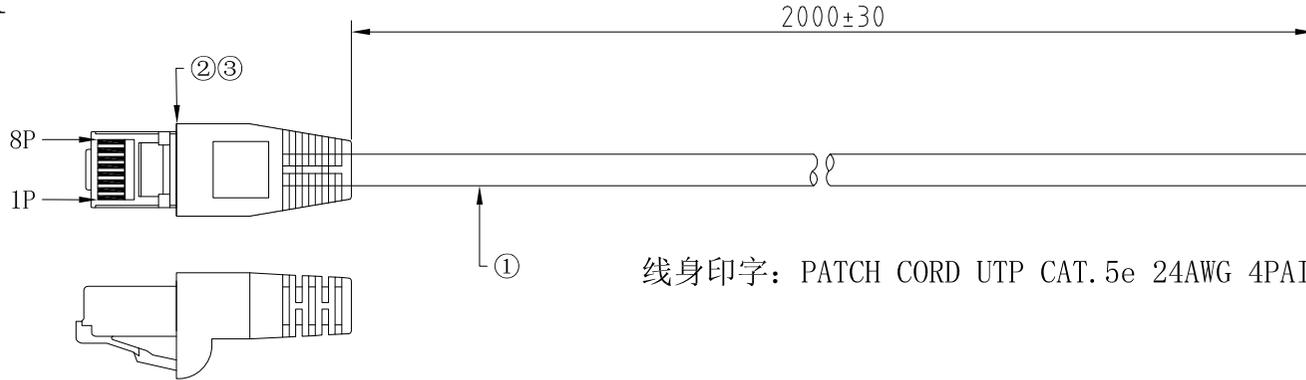

线身印字: PATCH CORD UTP CAT. 5e 24AWG 4PAIRS

NOTE:
 1. 100% OPEN&SHORT AND MISS WIRE:
 CONTACT RESISTANCE:2.0 OHM MAX;
 INSULATION RESISITANCE:10M OHM MIN;
 HI-POT:DC300V/0.01S.
 2. ALL MATERIALS MUST BE RoHS COMPLIANT.

	P1	P2
1	WHITE/BLUE	OPEN
2	BLUE	OPEN
3	WHITE/ORANGE	OPEN
4	ORANGE	OPEN
5	WHITE/GREEN	OPEN
6	GREEN	OPEN
7	WHITE/BROWN	OPEN
8	BROWN	OPEN



Matrix Electronics Co.,Ltd

3	BOOT	GRAY 60P PVC	AR	g
2	CONN	RJ45 8P8C 3U"	1	PC
1	CABLE	CAT. 5e 24#(0.5BCCA(單芯線))*4P+棉線 OD:4.8mm 灰色PVC外被	3020	MM
No. 序号	ITEM 名称	DESCRIPTION 规格描述	QTY 数量	UNITS 单位

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.XXX ±0.10 ANGLE: ±2°	DESIGN BY:	DATE:	PART NAME:	
	Wu Zon Lin	2024/06/18	WIRE 8PIN/8PIN L=2000mm	
	CHECKED BY:	DATE:	PART NO.	MCABLE-UTP-023-RS
	Yoyo Yeh	2024/06/18	MOLD NO.	NA
UNIT: mm [inch]	APPROVED BY1:	DATE:	DRAW NO.	NA
SCALE:1:1 SIZE:A4	Richard Hsieh	2024/06/18	SHEET NO.	1 OF 1
	APPROVED BY2:	DATE:		
	Richard Hsieh	2024/06/18		