


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2024/10/08	WuZonLin

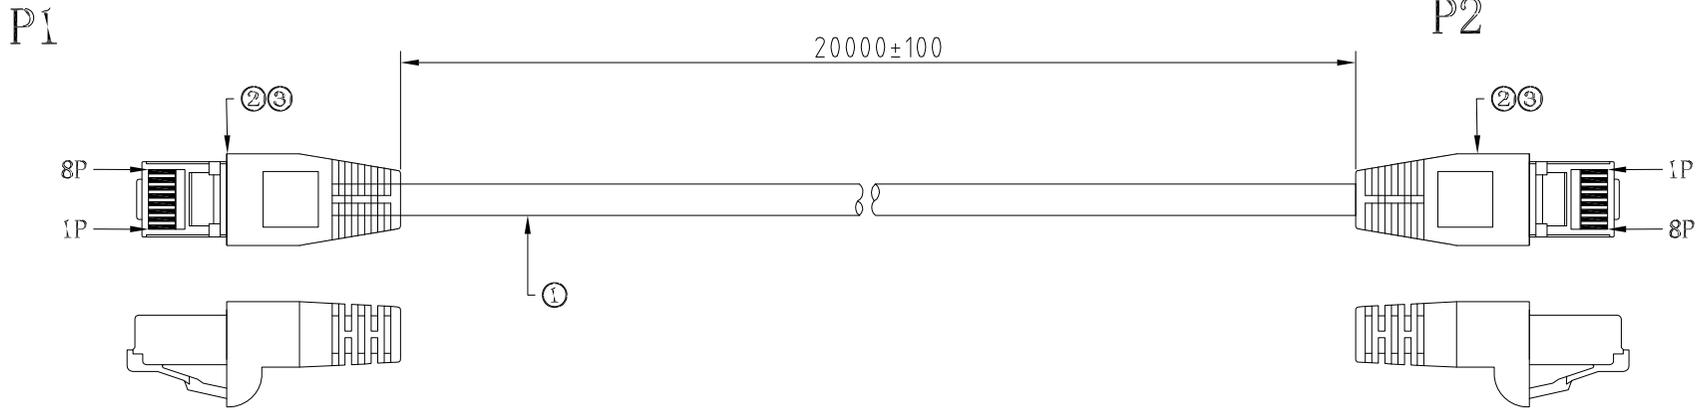

NOTE:
 1. 100% OPEN&SHORT AND MISS WIRE:
 CONTACT RESISTANCE:2.0 OHM MAX;
 INSULATION RESISITANCE:10M OHM MIN;
 HI-POT:DC300V/0.01S.
 2. ALL MATERIALS MUST BE RoHS COMPLIANT.

P1	P2
1 — WHITE/ORANGE	1
2 — ORANGE	2
3 — WHITE/GREEN	3
4 — BLUE	4
5 — WHITE/BLUE	5
6 — GREEN	6
7 — WHITE/BROWN	7
8 — BROWN	8

Matrix Electronics Co.,Ltd

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.XXX ±0.10 ANGLE: ±2°	DESIGN BY :	DATE :	PART NAME:	
	Wu Zon Lin	2024/10/08	CABLE 8PIN/8PIN L=20000mm	
	CHECKED BY:	DATE :	PART NO.	MCABLE-UTP-024-RS
	Yoyo Yeh	2024/10/08		
UNIT: mm [inch] SCALE:1:1 SIZE:A4	APPROVED BY1:	DATE :	MOLD NO. NA	
	Richard Hsieh	2024/10/08		
	APPROVED BY2:	DATE :	DRAW NO.	NA
Richard Hsieh	2024/10/08	SHEET NO.	1 OF 1	

3	BOOT	GRAY 60P PVC	AR	g
2	CONN	RJ45 8P8C 3U"	2	PC
1	CABLE	CAT. 5e 24#(0.5BCCA(單芯線))*4P+棉線 OD:4.8mm 灰色PVC外被	20040	MM
No. 序号	ITEM 名称	DESCRIPTION 规格描述	QTY 数量	UNITS 单位