



GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2024/06/28	Wu ZonLin

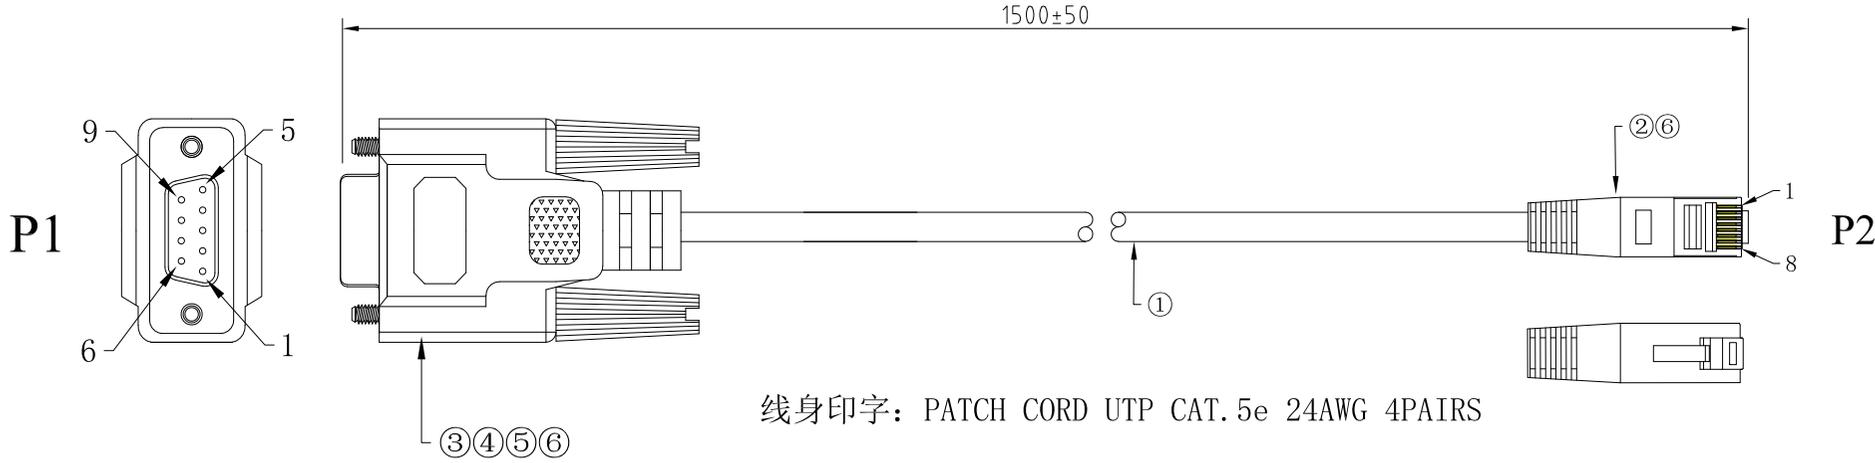

线身印字: PATCH CORD UTP CAT. 5e 24AWG 4PAIRS

- 技术要求:
- 100%测试导通错路、短路、开路;
 - 导通阻抗: 2Ω MAX;
 - 测试电压: DC 300V/0.01S;
 - 绝缘阻抗: 20MΩ MIN;
 - 所有材料符合RoHS2.0标准;

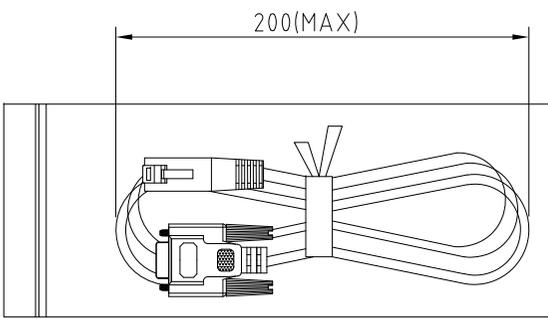

包装方式: 单线8字绕线, 扎带固定, PE带热封口;

P1	颜色	P2
5	蓝	4
2	白蓝	5
3	绿	6

					 Matrix Electronics Co., Ltd				
6	外模胶料	PVC 灰色胶料	AR	g	TOLERANCE: X:X ±0.35 X:XX ±0.25 X:XXX ±0.20 X:XXX ±0.15 ANGLE: ±5°	DESIGN BY :	DATE :	PART NAME:	
5	内模胶料	LD-PE料	AR	g		Wu ZonLin	2024/06/28	RS-232 9 PIN FEMALE/RJ-45 CABLE L=1.5M (3 PIN ONLY)	
4	螺丝	4-40UNC, 一字头灰色模体, 螺丝镀镍, L=31MM (不含头)	2	PCS		CHECKED BY:	DATE :	PART NO.	MCABLE-RTR-014-RS
3	连接器	D-SUB 9PIN FEMALE (母)	1	PCS		APPROVED BY1:	DATE :	MOLD NO.	NA
2	连接器	8P8C 水晶头	1	PCS		Richard Hsieh	2024/06/28	DRAW NO.	NA
1	线材	CAT5e UTP 24AWG*4P, GRAY	AR	MM	UNIT: mm [inch]	APPROVED BY2:	DATE :	SHEET NO.	1 OF 2
No.	ITEM	DESCRIPTION	QTY	UNITS	SCALE:1:1	SIZE:A4			