


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2024/03/05	WuZonLin

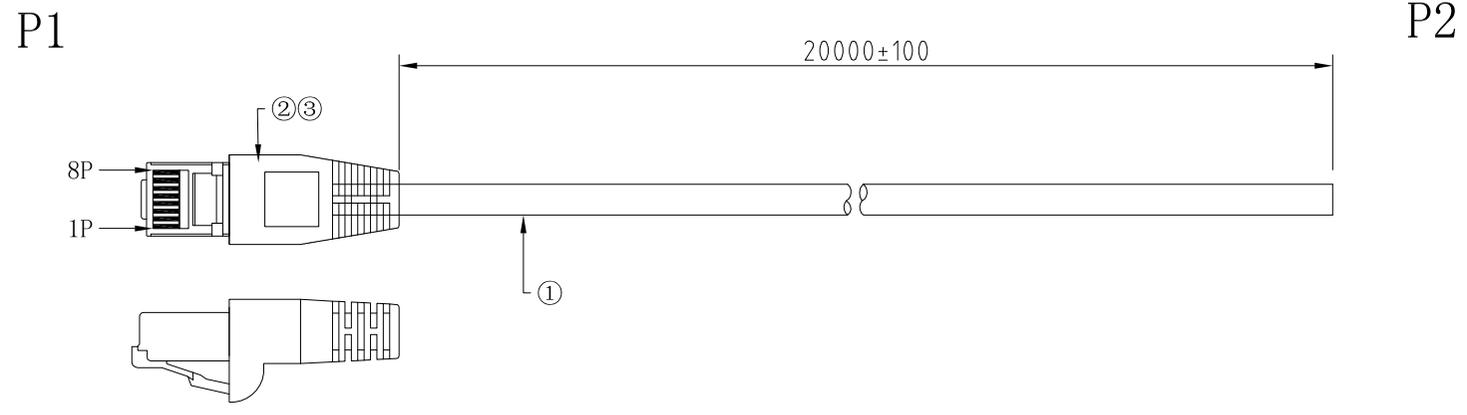

	P1	P2
1	WHITE/ORANGE	OPEN
2	ORANGE	OPEN
3	WHITE/GREEN	OPEN
4	BLUE	OPEN
5	WHITE/BLUE	OPEN
6	GREEN	OPEN
7	WHITE/BROWN	OPEN
8	BROWN	OPEN

NOTE:
 1. 100% OPEN&SHORT AND MISS WIRE:
 CONTACT RESISTANCE:2.0 OHM MAX;
 INSULATION RESISITANCE:10M OHM MIN;
 HI-POT:DC300V/0.01S.
 2. ALL MATERIALS MUST BE RoHS COMPLIANT.

Matrix Electronics Co.,Ltd

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 ANGLE: ±2°	DESIGN BY : Wu Zon Lin	DATE : 2024/03/05	PART NAME: WIRE 8PIN/8PIN L=20000mm
	CHECKED BY: Yoyo Yeh	DATE : 2024/03/05	PART NO. MCABLE-UTP-018-RS
UNIT: mm [inch]	APPROVED BY1: Richard Hsieh	DATE : 2024/03/05	MOLD NO. NA
SCALE:1:1 SIZE:A4	APPROVED BY2: Richard Hsieh	DATE : 2024/03/05	DRAW NO. NA SHEET NO. 1 OF 1

No. 序号	ITEM 名称	DESCRIPTION 规格描述	QTY 数量	UNITS 单位
3	BOOT	BLACK 60P PVC	AR	g
2	CONN	RJ45 8P8C 3U"	1	PC
1	CABLE	CAT. 5e 24#(0.5BCCA(單芯線))*4P+棉线 OD:4.8mm 灰色PVC外被	20020	MM