


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2024/07/04	Wu ZonLin

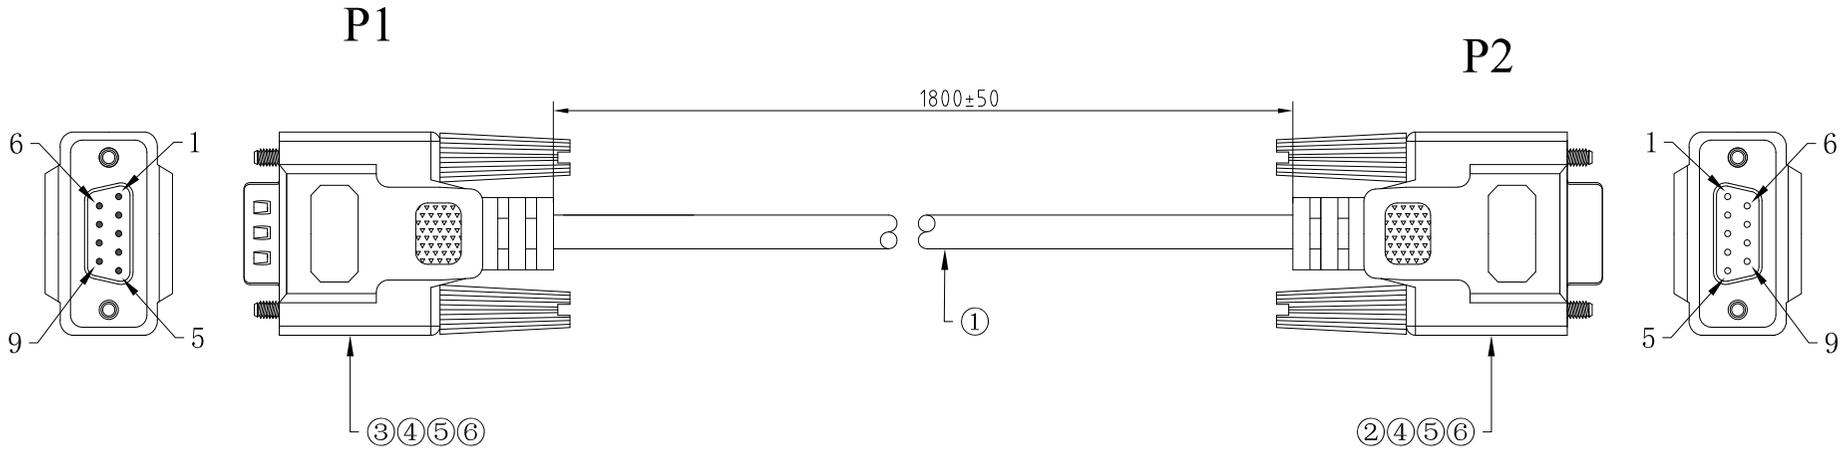

技术要求:

- 1、100%测试导通错路、短路、开路;
- 2、导通阻抗: 2Ω MAX;
- 3、测试电压: DC 300V/0.01S;
- 4、绝缘阻抗: 20MΩ MIN;
- 5、所有材料符合RoHS2.0标准;


P1	颜色	P2
9	灰	9
8	棕	8
7	橙	7
6	紫	6
5	绿	5
4	蓝	4
3	白	3
2	黄	2
1	红	1
SHELL	地线	SHELL



Matrix Electronics Co., Ltd

<p>TOLERANCE:</p> <p>X:X ±0.35</p> <p>X:XX ±0.25</p> <p>X:XXX ±0.20</p> <p>X:XXX ±0.15</p> <p>ANGLE: ±5°</p>	DESIGN BY :	DATE :	PART NAME:	
	Wu ZonLin	2024/07/04	RS-232 CABLE DB-9PIN FEMALE / MALE 1.8M	
	CHECKED BY:	DATE :	PART NO.	MCABLE-RTR-015-RS
	Hanson Huang	2024/07/04	MOLD NO.	NA
APPROVED BY1:	DATE :	DRAW NO.	NA	
Richard Hsieh	2024/07/04	SHEET NO.	1 OF 2	
APPROVED BY2:	DATE :			
Richard Hsieh	2024/07/04			

No.	ITEM	DESCRIPTION	QTY	UNITS
6	外模胶料	PVC 黑色胶料	AR	g
5	内模胶料	LD-PE料	AR	g
4	螺丝	4-40UNC, 一字头黑色模体, 螺丝镀镍, L=31MM (不含头)	2	PCS
3	连接器	D-SUB 9PIN MALE (公)	1	PCS
2	连接器	D-SUB 9PIN FEMALE (母)	1	PCS
1	线材	UL2464-26AWG*9C+AEB 黑色PVC外被	AR	MM



UNIT: mm [inch]
SCALE:1:1 SIZE:A4