
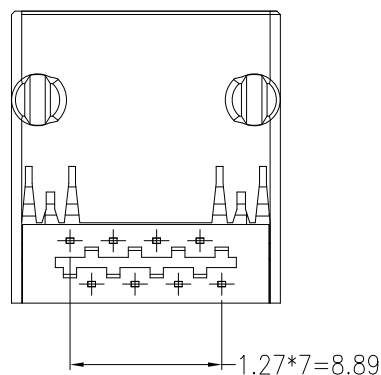
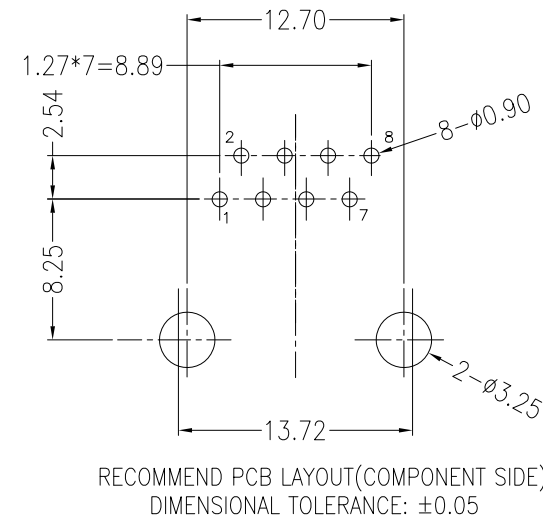
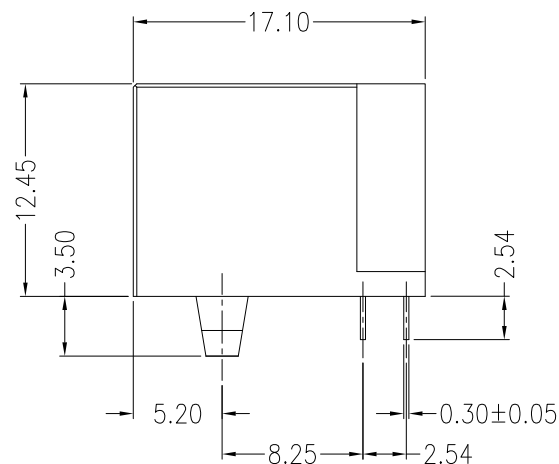


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2019/03/07	Summer Wang

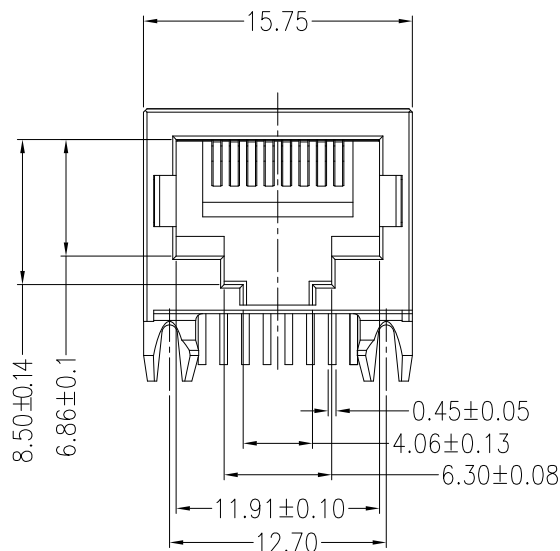

MATRIX PART NO:

M R J N - 1 1 T 998 RS
Matrix=RJ45
F : 10/100
G : 10/100/1000
N : Pure Connector
RS : ROHS
HF : Halogen Free
Series Number
S : SMD
T : THT
11:1X1 ; 21:2X1
12:1X2 ; 22:2X2
14:1X4 ; 24:2X4
16:1X6 ; 26:2X6
18:1X8 ; 28:2X8
1U:RJ+USB

NOTES:

1. MATERIALS:

HOUSING: PBT, UL 94V-0, SNOW WHITE.
CONTACTS: T=0.30 mm PHOSPHOR BRONZE,
50u" NICKEL UNDERPLATE
100u" MATTE TIN ON SOLDER TAIL
GOLD 3u" ON CONTACT AREA.

2. OPERATING TEMPERATURE: -40°C ~ +85°C



3. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68, SUBPART F

Matrix Electronics Co., Ltd

TOLERANCE: X:X X:XX X:XXX X:XXX ANGLE: ±1°	DESIGN BY : Summer Wang	DATE : 2019/03/07	PART NAME: RJ45 1X1 W/O SHELL W/O LED
UNIT: mm [inch]	CHECKED BY: Vicky Hsieh	DATE : 2019/03/07	PART NO. MRJN-11T998RS
SCALE:1:1	APPROVED BY1: Richard Hsieh	DATE : 2019/03/07	MOLD NO. NA
SIZE:A4	APPROVED BY2: Richard Hsieh	DATE : 2019/03/07	DRAW NO. SHEET NO.
			1 OF 2

GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			Initial	2019/03/07	Summer Wang

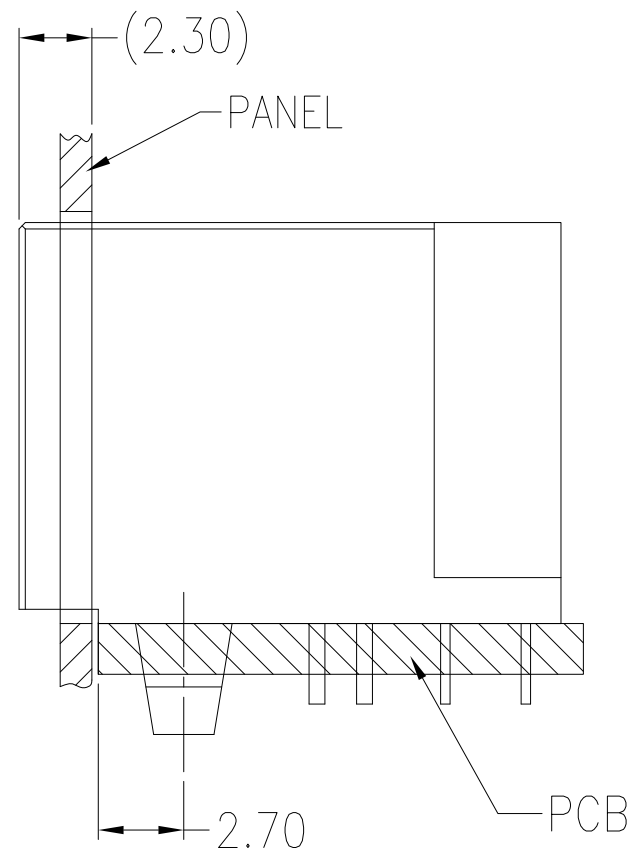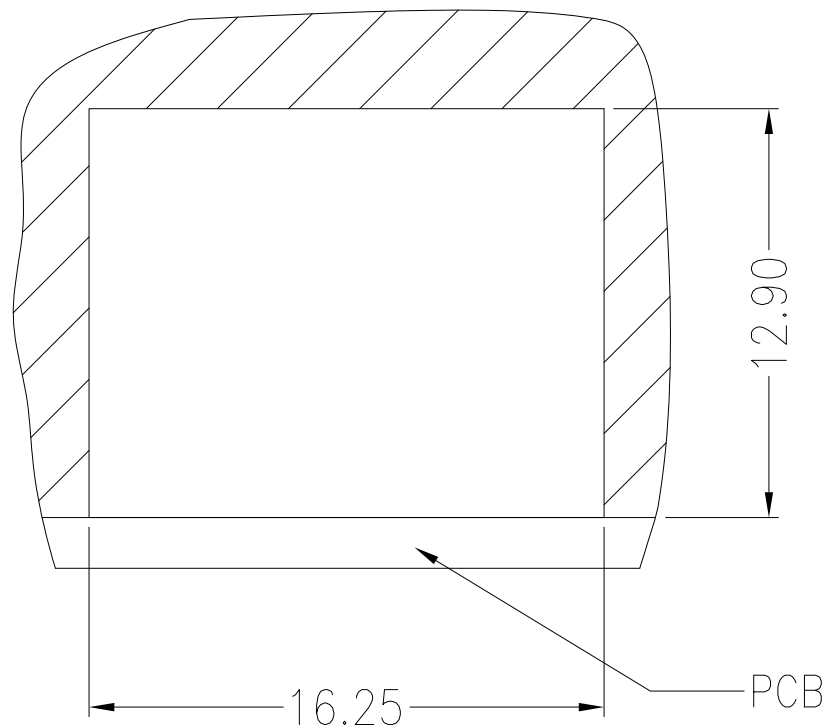

RECOMMENDED PANEL CUTOUT DIMENSION
DIMENSIONAL TOLERANCE: ± 0.15



Matrix Electronics Co.,Ltd

TOLERANCE: X:X X:XX ± 0.38 X:XXX ± 0.25 X:XXX ± 0.13 ANGLE: $\pm 1^\circ$	DESIGN BY : Summer Wang	DATE : 2019/03/07	PART NAME: RJ45 1X1 W/O SHELL W/O LED	
	CHECKED BY: Vicky Hsieh	DATE : 2019/03/07	PART NO.	MRJN-11T998RS
	APPROVED BY1: Richard Hsieh	DATE : 2019/03/07	MOLD NO.	NA
	APPROVED BY2: Richard Hsieh	DATE : 2019/03/07	DRAW NO.	
UNIT: mm [inch]	SCALE: 1:1	SIZE: A4	SHEET NO.	2 OF 2